


**CORKE™ 52**

**FPD6652\*\***

## 52" Ceiling Fan

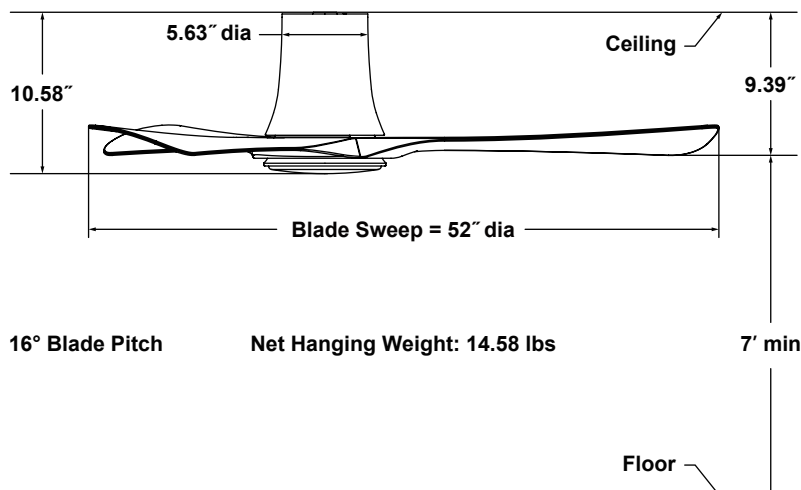


16° Blade Pitch


Net Hanging Weight: 14.58 lbs

7' min

Floor

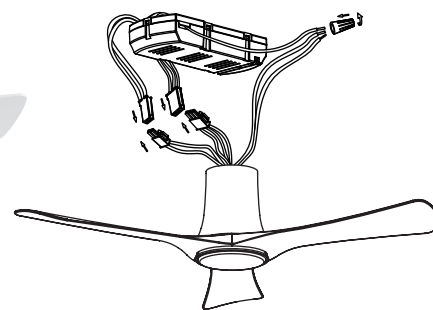

featuring KwikWire easy connection



Ceiling Bracket Width of the screw slot

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

DC125 x 20 motor is designed for optimal performance with this fan.

### BLADE SET:

A set of three 25" composite blades is included.

### CONTROL OPTIONS:

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, 5 CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall control is available — sold separately. Instructions is provided with each control.

### LIGHTING OPTIONS:

One 24-watt 5 CCT LED included.  
(2700K/3000K/3500K/4000K/5000K)

### LOCATION USE:

Fan is rated for dry and damp locations.  
This fan is for room up to 400 sq ft.

### Available Finishes

| Available Finishes |                                                                    |
|--------------------|--------------------------------------------------------------------|
| BL                 | Black with Black Blades and Opal Frosted Glass                     |
| BLK                | Black with KOA Blades and Opal Frosted Glass                       |
| BSMW               | Brushed Satin Brass with Matte White Blades and Opal Frosted Glass |
| MW                 | Matte White with Matte White Blades and Opal Frosted Glass         |

### Airflow / Energy Efficiency Info (120V)

| Fan Speed               | Max RPM | CFM  | CFM / Watts | Amps | Watts |
|-------------------------|---------|------|-------------|------|-------|
| High (6 <sup>th</sup> ) | 184     | 5409 | 182         | 0.43 | 30    |
| Med (4 <sup>th</sup> )  | 129     | 3864 | 365         | 0.16 | 11    |
| Low (1 <sup>th</sup> )  | 49      | 1180 | 452         | 0.05 | 3     |

### Energy Guide FTC

| Power (W <sub>ave</sub> ) | Total Air Delivery (CFM <sub>ave</sub> ) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|------------------------------------------|-----------------------------------|--------------------------------|
| 20                        | 3426                                     | 6                                 | 170                            |

### Fan Velocity (FPM)

| High Speed Velocity | Average Velocity |
|---------------------|------------------|
| 529                 | 326              |

### Lighting Information (120V)

| Light Bulb  | Lumens Amount | Delivered Lumens        | Color Temp                                             | CRI | Shade/ Glass type |
|-------------|---------------|-------------------------|--------------------------------------------------------|-----|-------------------|
| 24W CCT LED | 2000          | 987/1003/1066/1099/1111 | Warm White/Soft White/Bright White/Cool White/Daylight | 90% | Opal Frosted      |