




SPITFIRE™ DC
CUSTOM 54

MAD6721** 54" Ceiling Fan

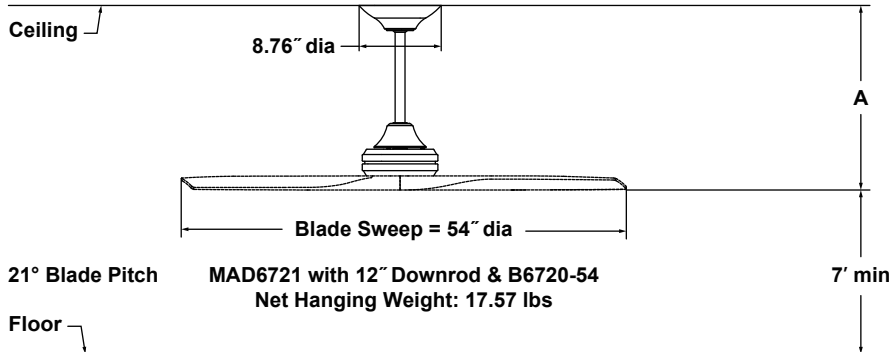

featuring **KwikWire**
easy connection

	A
Fan w/6" downrod	13.69"
Fan w/12" downrod	19.69"
Fan w/18" downrod	25.69"
Fan w/24" downrod	31.69"
Fan w/36" downrod	43.69"
Fan w/48" downrod	55.69"
Fan w/60" downrod	67.69"
Fan w/72" downrod	79.69"

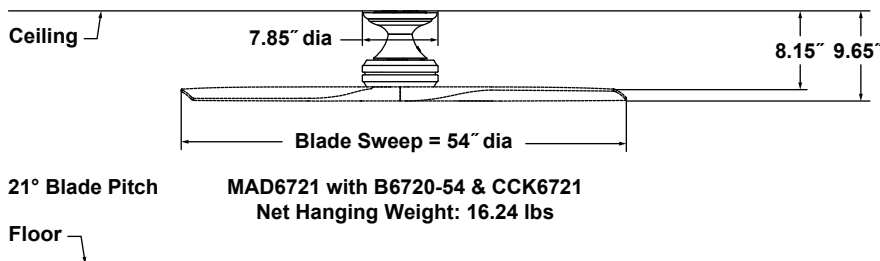

Available Finishes			
AGP	Antique Graphite	DZ	Dark Bronze
BL	Black	GR	Matte Greige
BN	Brushed Nickel	GZ	Galvanized
BS	Brushed Satin Brass	MW	Matte White
DF	Drift Wood		

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC153 x 22 sensorless DC motor is designed for optimal performance with this fan.

BLADE SET:

3 bladed blade sets are available in paulownia material — all sold separately. See our catalog or visit www.fanimation.com for blade options.

LIGHTING OPTIONS:

LK6721BDC - One 18-watt 5 CCT LED (2700K/3000K/3500K/4000K/5000K).
LK6702 - One 24-watt 5 CCT LED (2700K/3000K/3500K/4000K/5000K).

ACCESSORY OPTIONS:

CAP6721 - Spitfire Decorative Cap.

CONTROL OPTIONS:

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, 5 CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall control is available — sold separately. Instructions is provided with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long downrod and 1" dia. x 12" long downrod. Optional downrods are available in 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit (CCK6721) is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

Airflow / Energy Efficiency Info (120V) test with 6" Downrod & B6720-54 Blades in 54" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 th)	186	6596	218	0.41	30
Med (4 th)	135	4115	276	0.22	15
Low (1 th)	51	1394	398	0.07	4

Airflow / Energy Efficiency Info (120V) test with 12" Downrod & B6720-54 Blades in 54" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 th)	190	7307	241	0.41	30
Med (4 th)	137	4405	364	0.18	12
Low (1 th)	50	1482	529	0.06	3

Airflow / Energy Efficiency Info (120V) test with CCK6721 & B6720-54 Blades in 54" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 th)	188	5340	175	0.42	31
Med (4 th)	134	3287	227	0.21	15
Low (1 th)	50	1170	334	0.07	4

Energy Guide FTC Measured with 6" Downrod & B6720-54 Blades in 54" sweep			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
18	4157	5	227

Fan Velocity (FPM) Measured with 6" Downrod & B6720-54 Blades in 54" sweep	
High Speed Velocity	Average Velocity
518	312