

# Harrow 1 and 3 Light Pendant

P1288, P1289

1.3

GENERATION LIGHTING

## Pendant

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

#### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

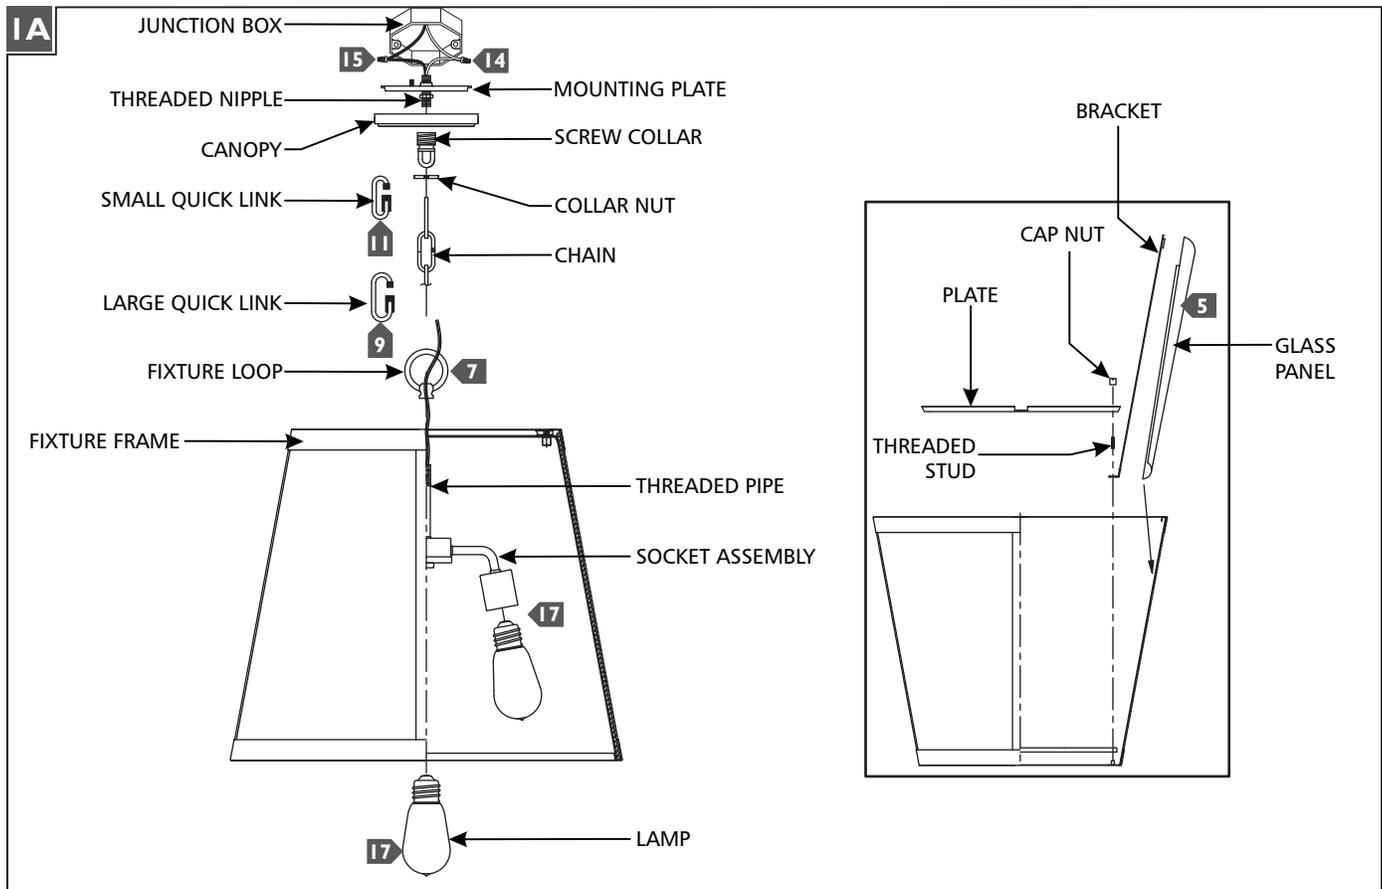

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Temporarily place the fixture upside down on a flat surface.
- 4** Remove the cap nuts, plate, threaded studs, brackets, and socket assembly from the fixture frame.
- 5** Install the glass panels by sliding them into the fixture frame.
- 6** Reinstall the socket assembly, brackets, threaded studs, plate, and cap nuts (in that order), then place the fixture right side up.
- 7** Screw the fixture loop onto the socket assembly's threaded pipe to secure it in place.
- 8** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 9** Install the large quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 10** Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 11** Install the small quick link onto the remaining end of the chain, then secure the quick link onto the screw collar
- 12** Weave the cord through the chain, collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 13** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.
- 17** Screw the lamp(s) into the socket(s). Refer to the label on the lamp socket for Max Wattage information.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.