



ABELLS LARGE & X-LARGE CHANDELIERS

GLC1196; GLC1205


General Product Information




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




NEC COMPLIANT JUNCTION BOX




DAMP LOCATION SAFE




BULB(S) (NOT INCLUDED)




CONVERTS TO LED




ADAPTABLE TO SLOPED CEILINGS



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




PLIERS

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

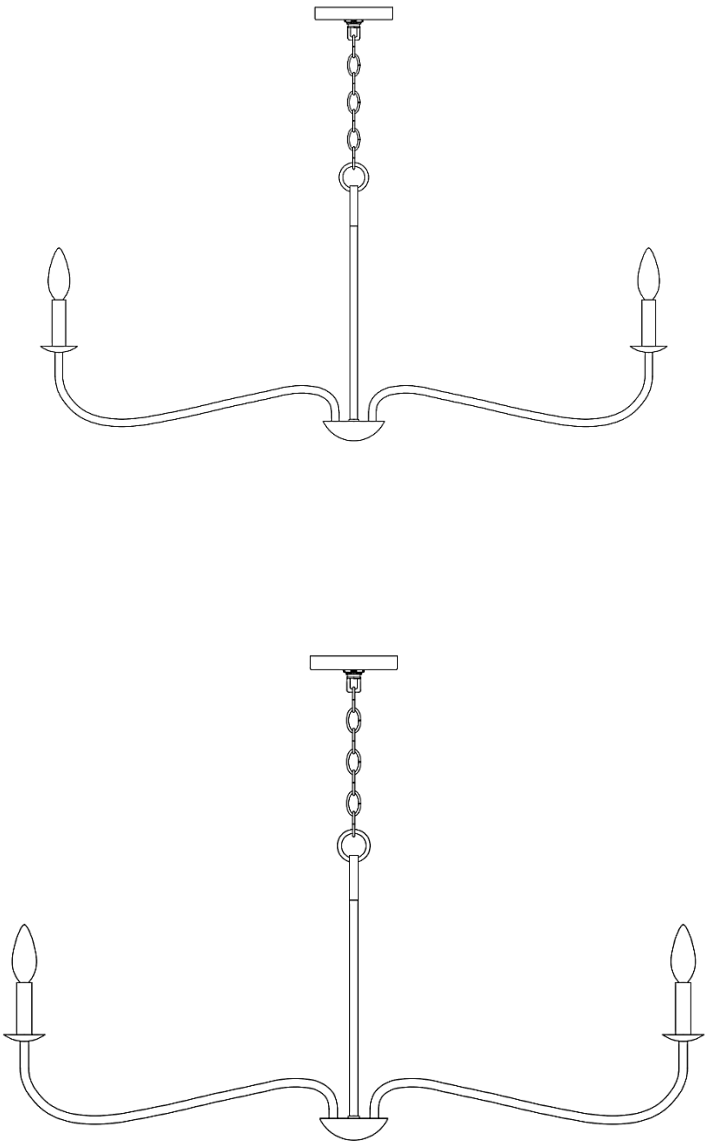

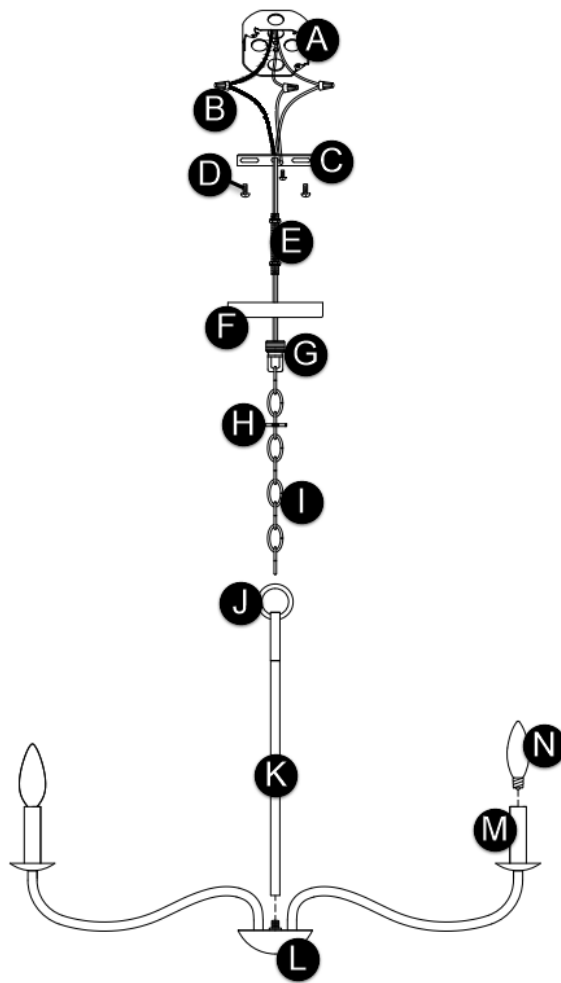

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Bar
- D. Mounting Screws
- E. Threaded Rod
- F. Canopy
- G. Canopy Loop
- H. Collar Nut
- I. Chain
- J. Fixture Loop
- K. Stem
- L. Fixture Base
- M. Sockets
- N. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting bar from the canopy. If necessary, install the threaded rod and canopy loop onto the mounting bar and then install it over the junction box using the mounting screws.
2. Thread the fixture wires through the stem and the fixture loop if necessary. Then install them on top of the fixture.
3. Shorten the chain as desired using pliers, then secure one end of the chain to the fixture loop.
4. Slide the collar nut and the canopy onto the chain and secure the other end to the canopy loop.
5. Spread the fixture arms evenly.
6. Weave the fixture wires through the chain, collar nut, canopy, canopy loop, and mounting bar.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black, smooth) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white, textured) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires behind the mounting bar into the junction box.

III. Installing the Fixture

1. Mount the canopy onto the mounting bar and secure it in place by screwing the collar nut tightly onto the canopy loop.
2. Screw the bulb(s) into the socket(s). Refer to the socket label for max wattage information.