




# GENERATION LIGHTING


## MENDOTA LARGE & X-LARGE CHANDELIERS

GLC1235; GLC1244

### General Product Information



### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

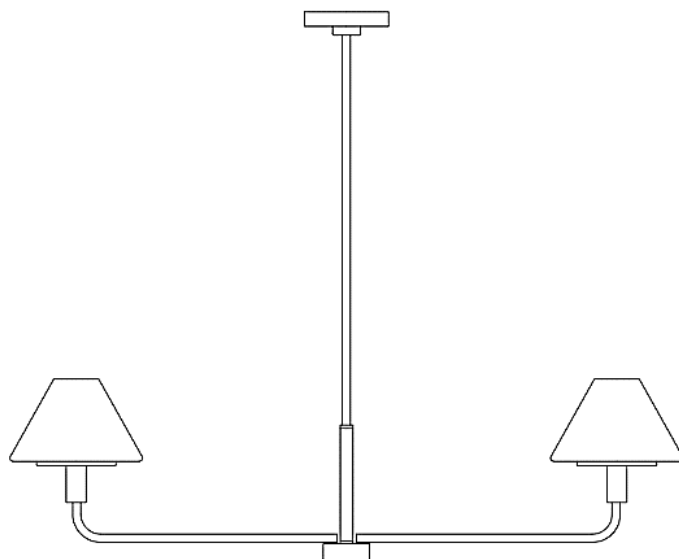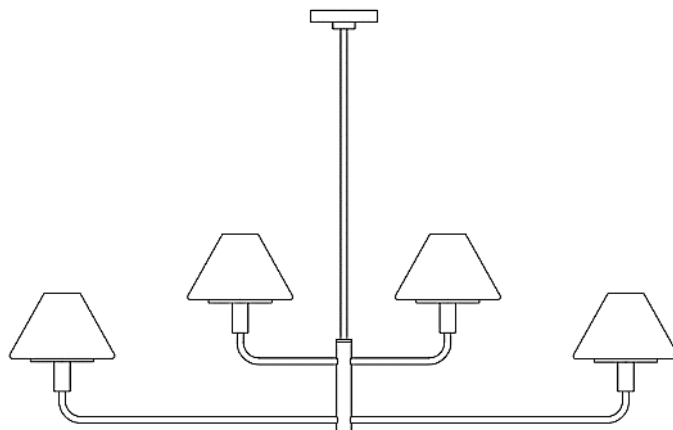

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Screw Collar & Mounting Screws (Not Illustrated)
- D. Half Ball
- E. Canopy
- F. Collar Nut
- G. Stem Assembly
- H. Fixture
- I. Fixture Arms
- J. Sockets
- K. Socket Plates
- L. Shades
- M. Counter Rings
- N. Counter Ring Tool
- O. Bulbs (Not Included)

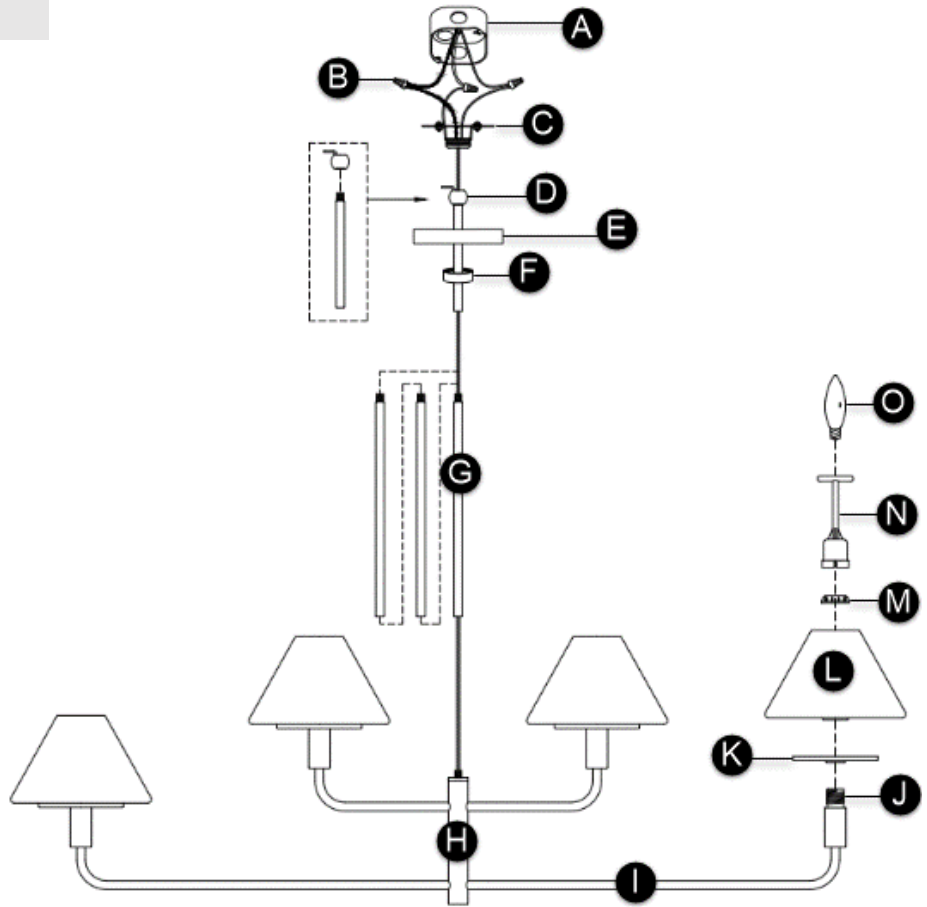

## INSTRUCTIONS

### I. Preparing the Fixture

1. Separate the mounting plate from the canopy and install it over the junction box using the mounting screws.
2. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
3. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball.
4. Screw the stem assembly on top of the fixture. Then screw the half ball onto the stem assembly.
5. Slide the half ball of the assembled fixture onto the mounting plate.
6. For GLC1235 only, spread the fixture arms evenly.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black/smooth) and hot power line wire
  - b) Neutral fixture wire (white/textured or ribbed) and neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

### III. Installing the Fixture

1. Mount the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Install the socket plates onto the sockets.
3. Place the shades over the socket plates and secure them in place with the counter rings using the counter ring tool.
4. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.