






EISELE SCONCE & 2, 3, & 4 LIGHT VANITIES

GLV1131; GLV1132; GLV1133; GLV1134

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE




This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

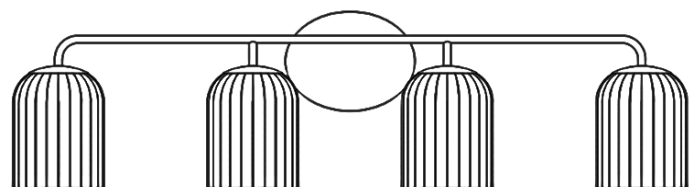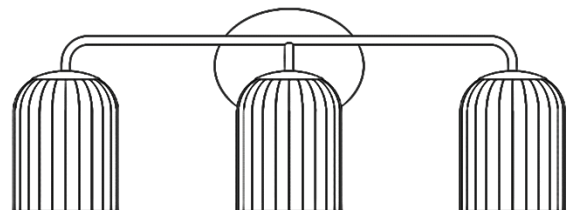

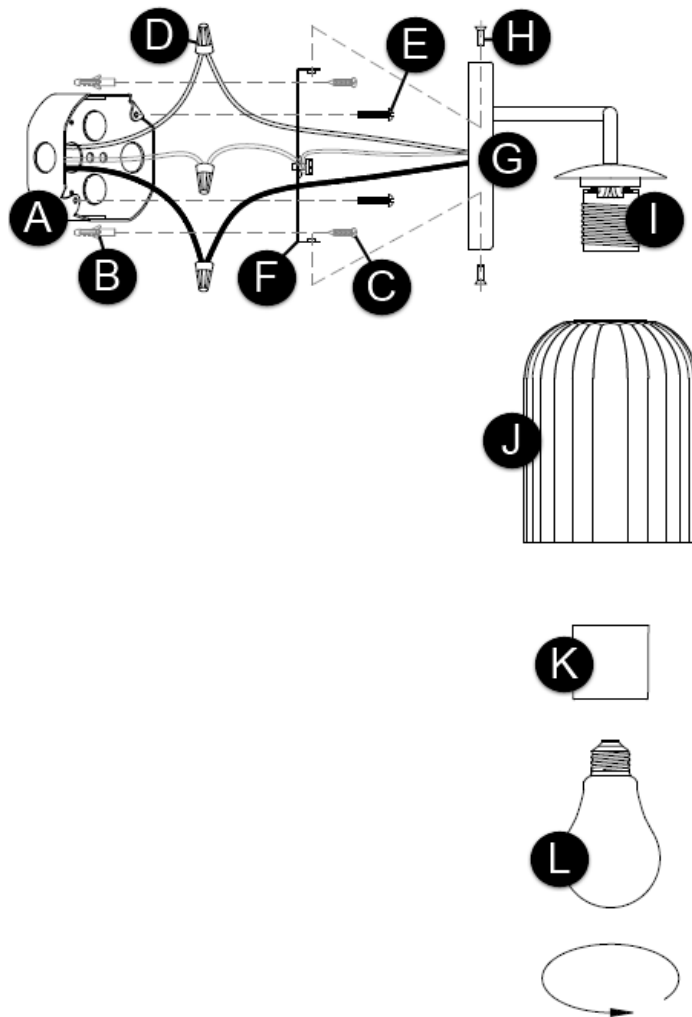

FIXTURE PARTS

- A. Junction Box
- B. Anchors (GLV1133; GLV1134 only)
- C. Anchor Screws (GLV1133; GLV1134 only)
- D. Wire Nut Connections
- E. Mounting Screws
- F. Mounting Plate
- G. Fixture Base
- H. Fixture Screws
- I. Sockets
- J. Shades
- K. Shade Collars
- L. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing for Installation

1. Separate the mounting plate from the fixture backplate.
2. **For GLV1133 and GLV1134 only**, temporarily install the mounting plate to the junction box. Mark the anchor hole locations on the mounting plate, then remove the mounting plate. Drill appropriately sized holes at the marked locations and install the anchors.
3. Secure the mounting plate to the junction box with the mounting screws.
4. **For GLV1133 and GLV1134 only**, further secure the mounting plate to the wall with the anchors and anchor screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral (white) fixture wire to neutral power line
 - b) Hot (black) fixture wire to hot power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place using the fixture screws.
2. Place the shade(s) over the socket(s) and secure them with the shade collar(s).
3. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.