


GENERATION LIGHTING

WERLEY LARGE CHANDELIER

GLC1255


General Product Information




SAVE THESE INSTRUCTIONS!

STANDARD INSTALLATION


INDOOR




NEC COMPLIANT JUNCTION BOX




DAMP LOCATION SAFE




BULB(S) (NOT INCLUDED)




CONVERTS TO LED




ADAPTABLE TO SLOPED CEILINGS



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty



FCC Statement


Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

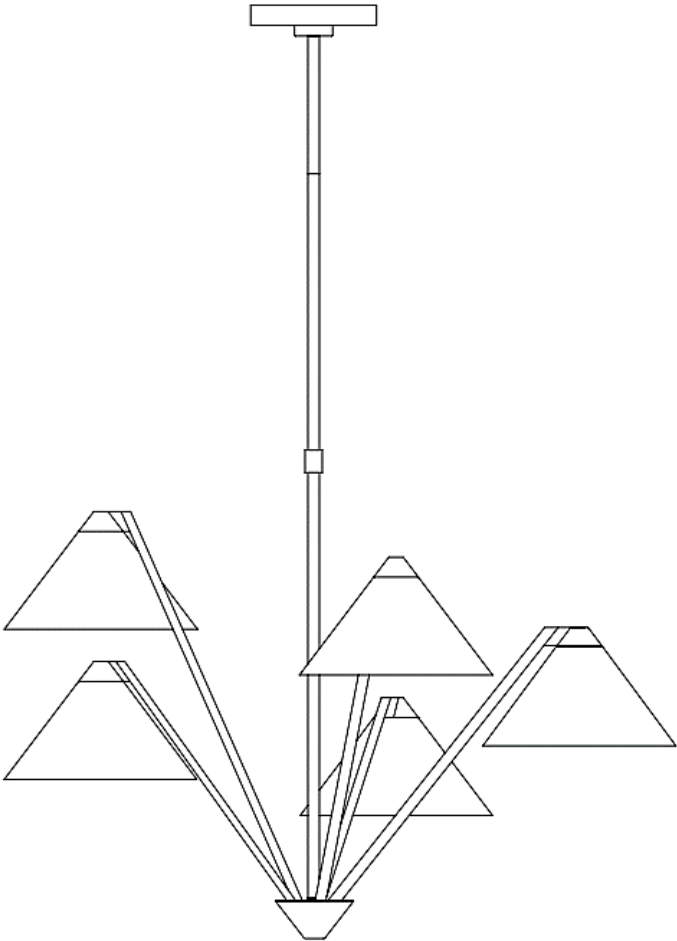

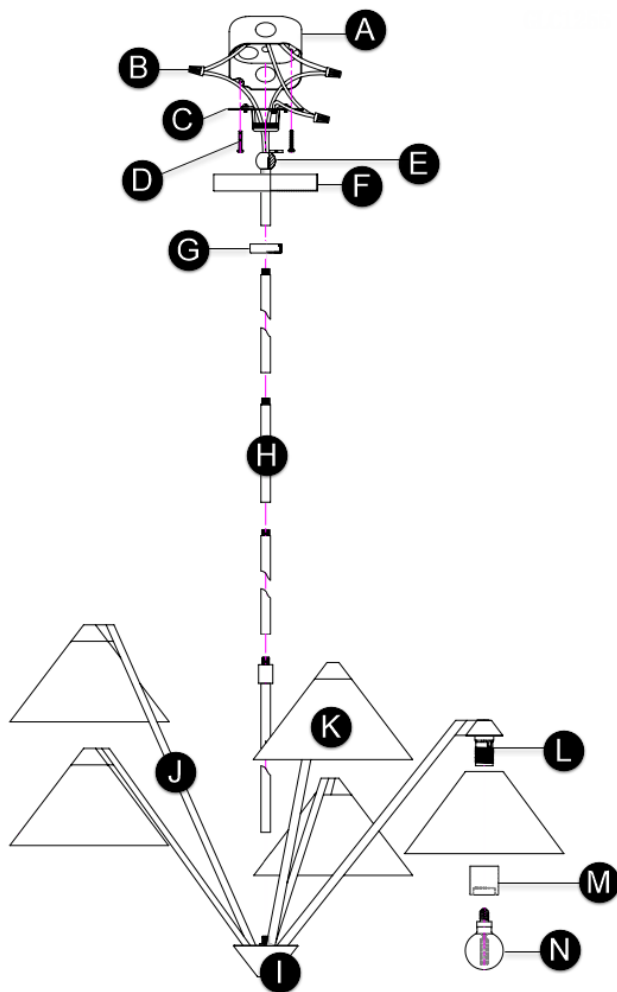

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Screw Collar
- D. Mounting Screws
- E. Half Ball
- F. Canopy
- G. Collar Nut
- H. Stem Assembly (Long & Short Stems)
- I. Fixture
- J. Fixture Arms
- K. Glass Shades
- L. Sockets
- M. Socket Rings
- N. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the canopy and install it over the junction box using the mounting screws.
2. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together.
3. Feed the fixture wires through the long stem, stem assembly, collar nut, canopy, and half ball.
4. Screw the long stem on the top of the fixture and install the stem assembly on top of the long stem. Then screw the half ball onto the stem assembly.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) and hot power line wire
 - b) Neutral fixture wire (white/textured or ribbed) and neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Place the shades onto the sockets of every fixture arm and secure them in place by screwing the socket rings onto every socket.
3. Screw the bulbs into the socket. Refer to the socket label for max wattage information.