



MILES SMALL, MEDIUM, LARGE & X-LARGE VANITIES

GLV1051; GLV1052; GLV1053; GLV1054

General Product Information



Tools Required/Suggested



Safety Information

CAUTION-RISK OF FIRE





This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

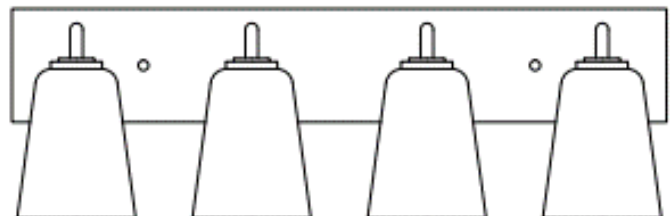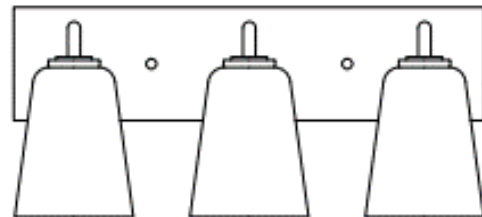

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate (GLV1051, GLV1052 Only)
- D. Mounting Studs
- E. Mounting Screws
- F. Fixture Base/Backplate
- G. Cap Nut(s)
- H. Fixture
- I. Socket(s)
- J. Shade(s)
- K. Spacer(s)
- L. Counter Ring(s)
- M. Counter Ring Tool
- N. Bulb(s) (Not Included)
- O. Mounting Plate (GLV1053, GLV1054 Only)
- P. Anchors & Anchor Screws (GLV1053, GLV1054 Only)

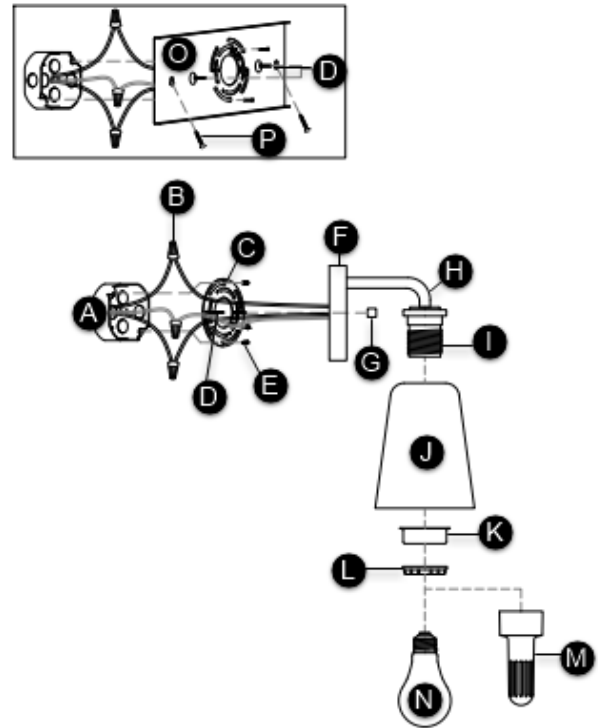

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture backplate.
2. **For GLV1051, GLV1052 only:** Use the mounting screws to secure the mounting plate to the junction box. **For GLV1053, GLV1054 only:** Use the mounting plate to trace and mark the locations for the anchors on the wall. Then drill a hole at the marked locations to fit the anchors into. Next, secure the mounting plate to the junction box and wall by drilling the anchor screws into the anchors.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured or ribbed) to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Align the holes in the fixture base with the mounting studs on the mounting plate and push backwards so that they poke through the holes in the fixture base.
2. Secure the fixture base to the mounting plate by screwing the cap nuts onto the mounting studs.
3. Place the shade(s) over the socket(s) and secure them with the spacer(s) and counter ring(s) using the counter ring tool.
4. Screw the bulb(s) into the socket(s). Refer to the socket label for max wattage information.