


GENERATION LIGHTING

MILES SMALL, MEDIUM & X-LARGE CHANDELIERS


GLC1115; GLC1123; GLC1139

General Product Information


Please visit www.visualcomfort.com for product specs.




ETL
US
Intertek




SAVE THESE
INSTRUCTIONS!




STANDARD
INSTALLATION




INDOOR




NEC COMPLIANT
JUNCTION BOX




DAMP LOCATION
SAFE




BULB(S)
(NOT INCLUDED)




CONVERTS TO LED



ADAPTABLE TO
SLOPED CEILINGS



CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES




Product Warranty



FCC Statement

Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



WIRE CUTTER



MEASURING TAPE

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

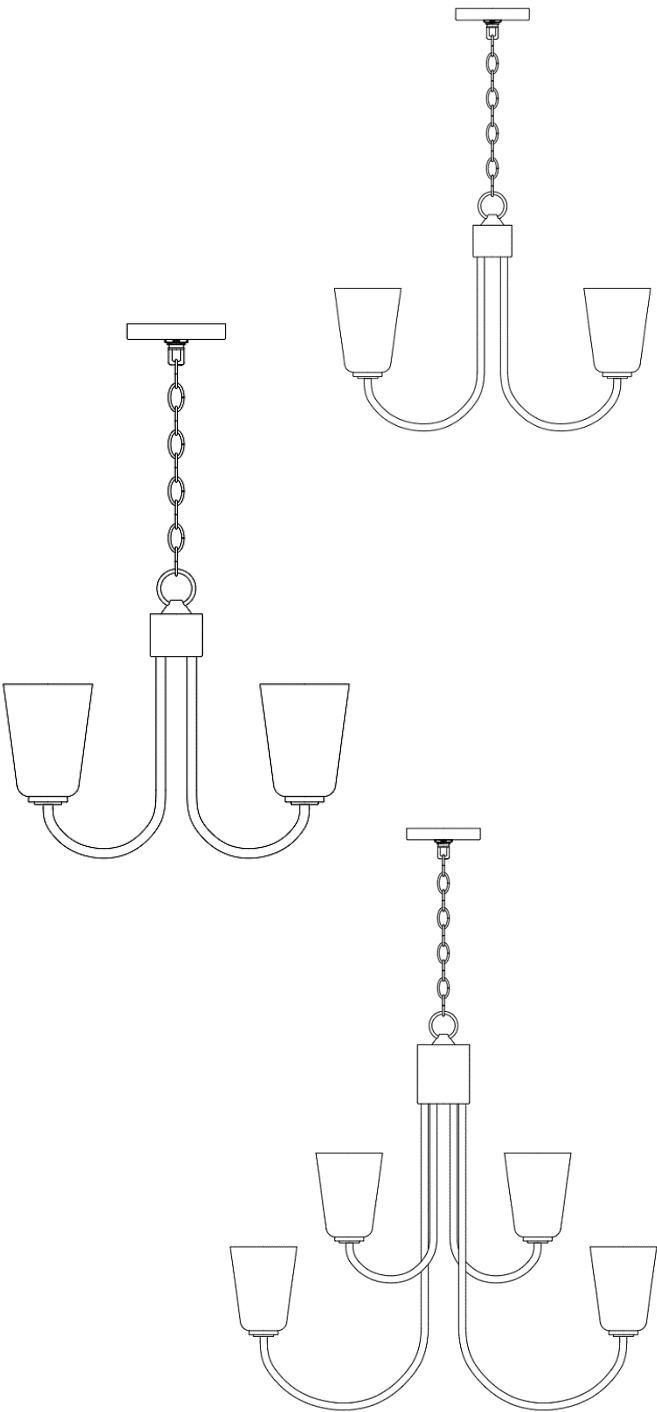

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut
- C. Connections
- D. Mounting Bar
- E. Ground Screw
- F. Threaded Rod
- G. Canopy
- H. Canopy Loop
- I. Collar Nut
- J. Chain
- K. Fixture Loop
- L. Fixture
- M. Fixture Arms
- N. Sockets
- O. Shades
- P. Spacers
- Q. Counter Rings
- R. Counter Ring Tool
- S. Bulbs (Not Included)

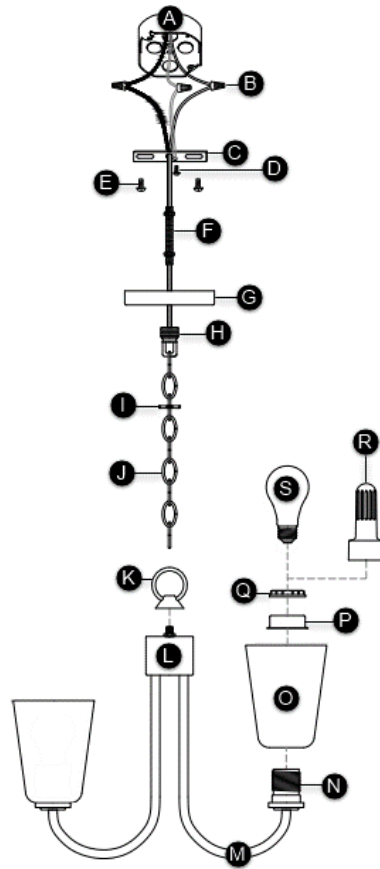

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting bar from the canopy.
2. If necessary, screw the shorter end of the threaded rod tightly onto the mounting bar. Then screw the canopy loop onto the threaded rod.
3. Install the mounting bar over the junction box using the mounting screws.
4. Weave the fixture cord through the fixture loop and then secure the fixture loop on the fixture.
5. Open the arms evenly, if necessary.
6. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
 - a) Remove a portion of the chain by opening a link with pliers and install the bottom end of chain onto the fixture loop. Then close the open link.
 - b) Unscrew the collar nut from the screw collar and install it onto the chain.
 - c) Then install the canopy onto the chain and open a link on the remaining end of chain and secure the chain onto the canopy loop. Then close the open link.
7. Weave the fixture cord through the chain, collar nut, canopy loop, canopy, threaded rod, and out of the junction box.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured or ribbed) to neutral power line wire
4. Carefully tuck all the wires behind the mounting bar into the junction box.

III. Installing the Fixture

1. Mount the canopy onto the mounting bar and secure it in place by screwing the collar nut tightly onto the canopy loop.
2. Place the shades over the sockets and secure them with the spacers and counter rings, using the counter ring tool.
3. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.