

INSTALLATION INSTRUCTIONS


For Item: GLFR2-300/400/500

IMPORTANT SAFETY INSTRUCTIONS: Read all the instructions before installation.

Installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations is recommended. All parts must be used as indicated.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

Fig. 1

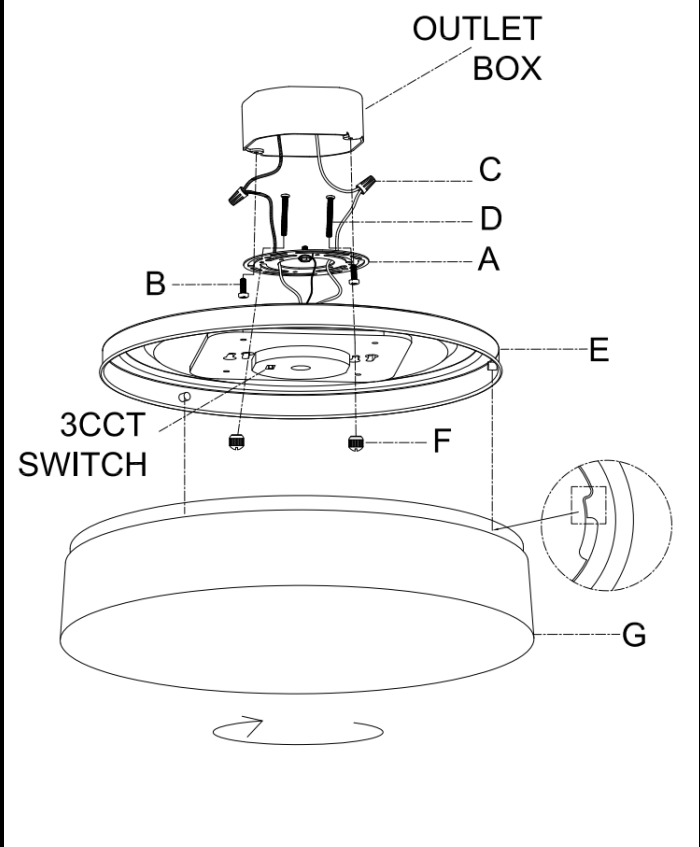

NOTE: INSTALLATION BY A LICENSED ELECTRICIAN IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE (NEC) AND LOCAL REGULATIONS IS RECOMMED. ALL PARTS MUST BE USED AS INDICATED IN THESE INSTRUCTIONS.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the 2 mounting screws (D) into the mounting plate (A) spaced the same distance apart as the holes in the fixture back plate. (You can adjust the length of the screws if necessary.)
4. Attach the mounting plate (A) to outlet box (not supplied) with mounting screws (B). Ground Wire must face out.

CONNECTING THE WIRES (Fig. 2).

4. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.

COMPLETING THE INSTALLATION (Fig.1)

5. Align the housing (E) to mounting plate (A) and secure with nuts (F).Then twist the shade (G) to the housing (E).
- 6.The fixture can switch between three color temperatures(2700K/3000K/4000K),which can be adjusted to you preference with the switch inside the housing.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 2



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	House Wires
White or Ribbed	White (Neutral)
Fixture Wires	House Wires
Bare wire (Ground)	Green or Bare Copper (Ground)