


# GLOBAL VIEWS

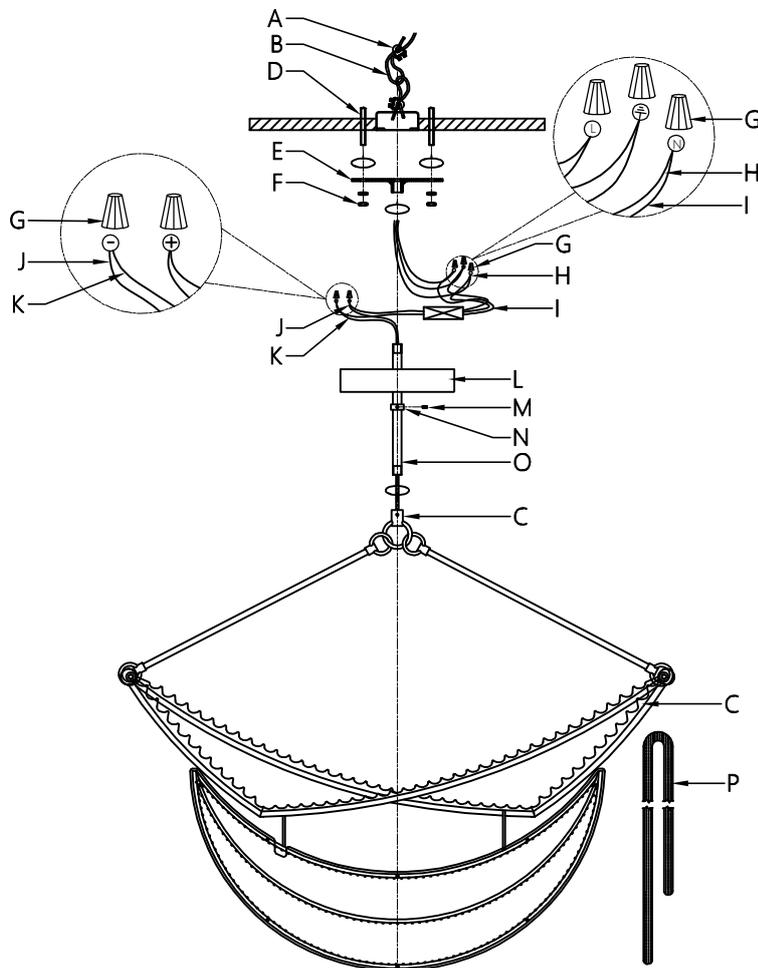

8.83038-B

Parts Include:

- A. Metal Safety Piece
- B. Safety Wire
- C. Lamp Body
- D. Expansion Bolt
- E. Mounting Bracket
- F. Decorative Nut
- G. Connector
- H. Main Power Cord
- I. Input Cord of Driver
- J. Output Cord of Driver
- K. Power Cord
- L. Canopy
- M. Screw
- N. Metal Ring
- O. Metal Tube
- P. Glass Rod

**Notice : VERY IMPORTANT ! PROFESSIONAL ELECTRICIAN INSTALLATION  
HIGHLY RECOMMENDED. IMPROPER INSTALLATION WILL CAUSE  
PERMANENT DAMAGE OR HAZARD ! ! !**

To Connect With  
J-box Power Cord  
AC PHASE OR TRIAC  
DIMMER SWITCH



To Connect With The  
Fixture Power Cord +  
To Connect With The  
Fixture Power Cord -

Reference Picture of LED Driver

## Installation Instruction :

- STEP 1. Shut off the main electrical supply.
- STEP 2. Put the Safety Wire (B) and Power Cord (K) through the Metal Tube (O), install the Metal Tube (O) to the Lamp Body (C).
- STEP 3. Put the Metal Tube (O) through the Metal Ring (N) and the Canopy (L).
- STEP 4. Put the Safety Wire (B) and the Power Cord (K) through the Mounting Bracket (E), then install the Mounting Bracket (E) to the Metal Tube (O).
- STEP 5. Connect the Power Cord (K) and the Output Cord of Driver (J) with the Connector (G) properly.
- STEP 6. Drill holes on the ceiling according to the holes position on the Canopy (L), put the Expansion Bolt (H) into the holes. And fix the Safety Wire (B) to the Expansion Bolt (D) with the Metal Safety Piece (A)
- STEP 7. Connect the Main Power Cord (H) and the Input Cord of Driver (I) with the Connector (G) properly.
- STEP 8. Fix the Mounting Bracket (E) to the Expansion Bolt (D) with the Decorative Nut (F).
- STEP 9. Fix the Canopy (L) to the Mounting Bracket (E) with the Screw (M) and the Metal Ring (N).
- STEP 10. Put the Glass Rod (P) to the Lamp Body (C).
- STEP 11. Turn on the power switch.