


STUDIO | A HOME

A GLOBAL VIEWS COMPANY

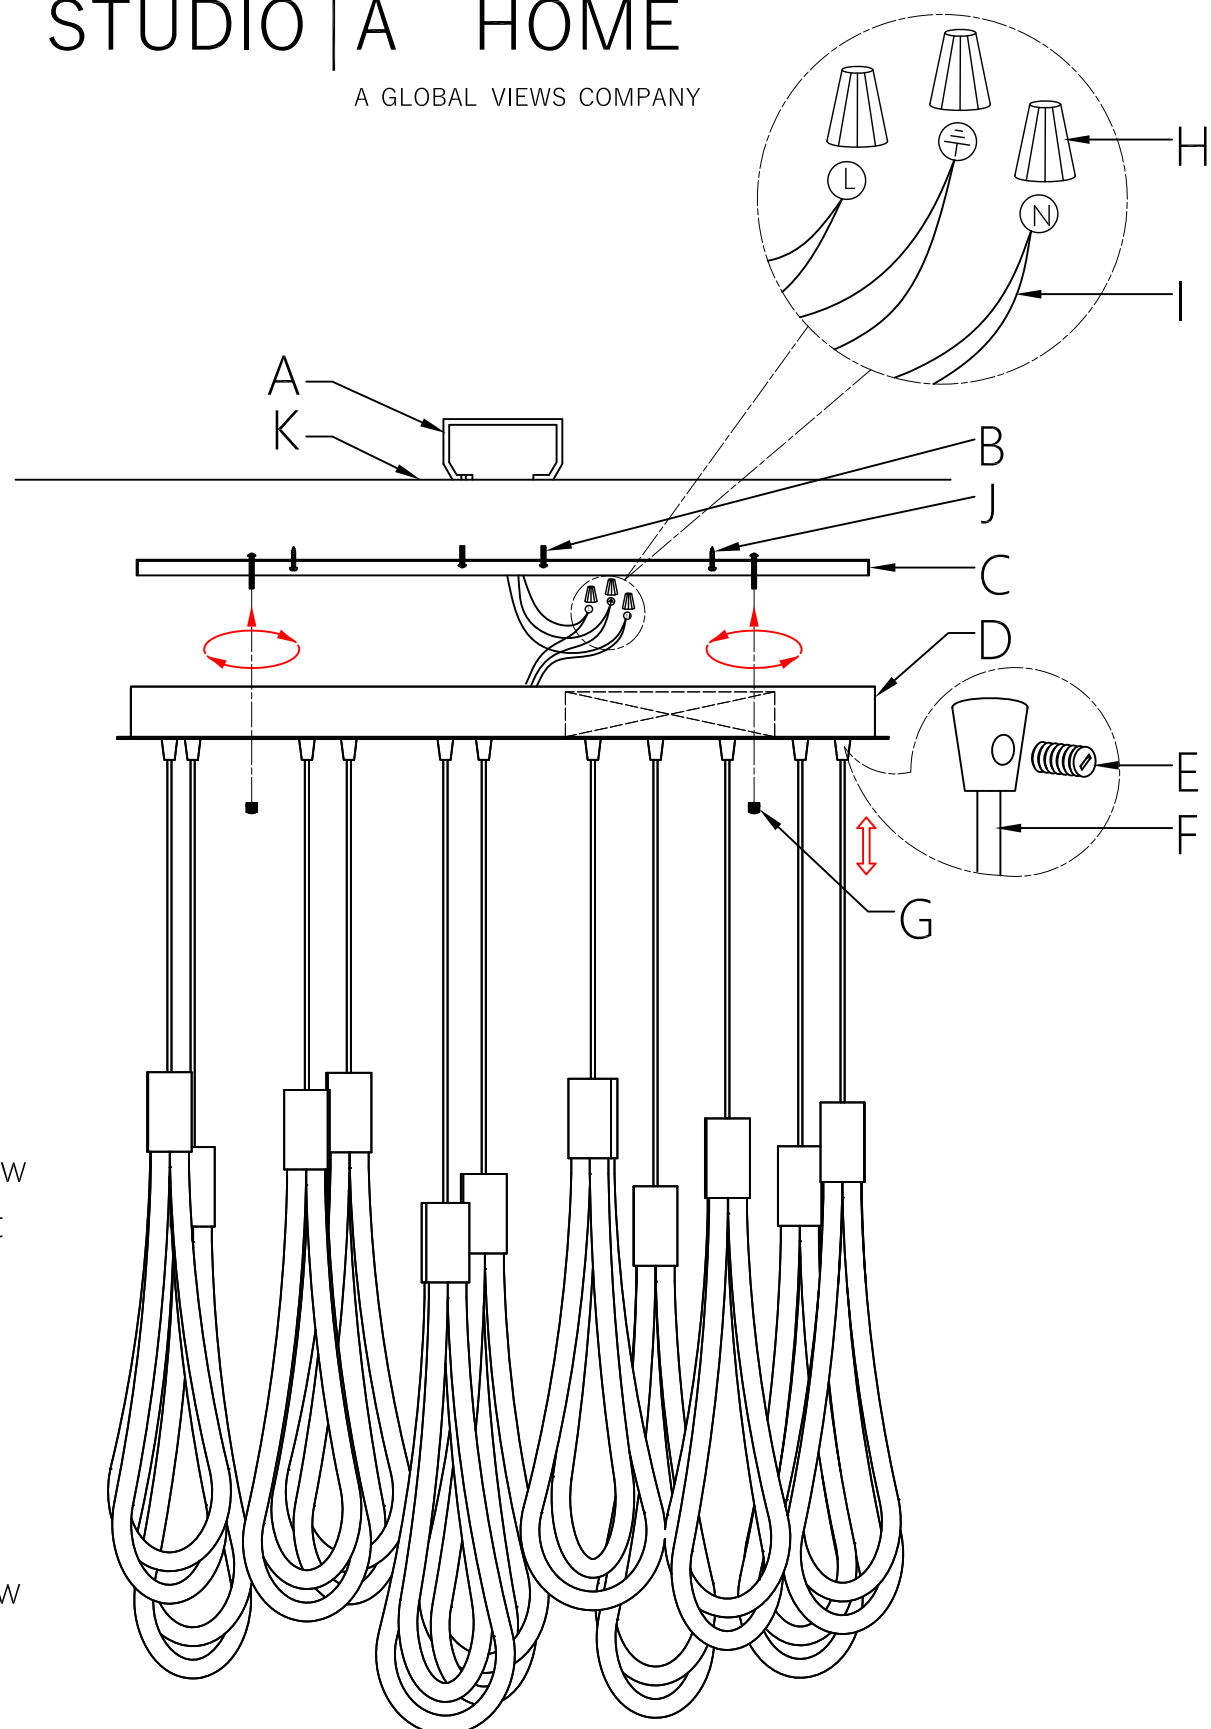

7.80643

Parts Include:

- A. J-Box
- B. Round Head Screw
- C. Mounting Bracket
- D. Canopy
- E. Plastic Screw
- F. Black Cord
- G. Finial
- H. Connector
- I. Electrical wire
- J. Self-tapping Screw
- K. Ceiling

Installation Notice

INSTALLATION BY A PROFESSIONAL ELECTRICIAN IS STRONGLY RECOMMENDED
IMPROPER INSTALLATION MAY CAUSE PERMANENT DAMAGE OR HAZARD

To Connect With
J-box Electrical wires
AC PHASE OR TRAIL
DIMMER SWITCH



To Connect With The
Fixture Electrical wire

+

To Connect With The
Fixture Electrical wire

-

Reference Picture of LED Driver

Installation Instruction:

1. Shut off the main electrical supply.
2. Fix the Mounting Bracket (C) to the J-Box (A) and Ceiling (K) with the Round Head Screw (B) and Self-tapping Screw (J).
3. Connect the Electrical wires (I) with the Electrical wires of J-Box (A) and secure with Connector (H).
4. Loosen the Plastic Screw (E), adjust the height of Black Cord (F) according to personal preference, and then tighten the Plastic Screw (E).
5. Fix the Canopy (D) to the Mounting Bracket (C) with the Finial (G).
6. Turn on the power switch.