


STUDIO | A HOME

A GLOBAL VIEWS COMPANY

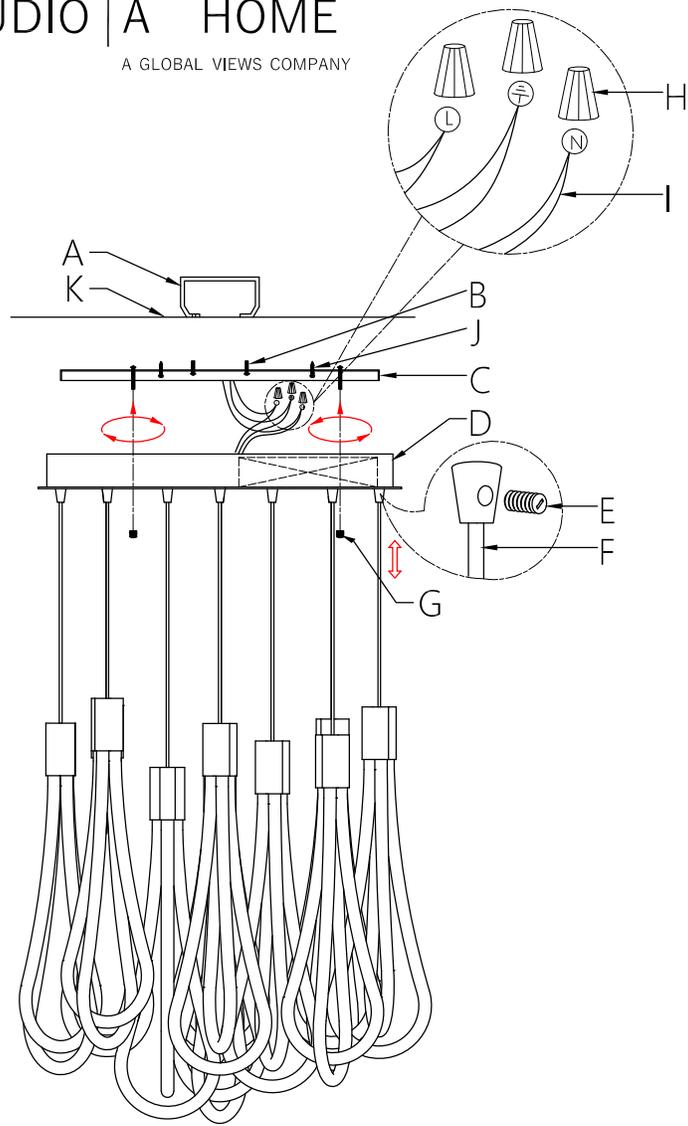

7.80678

Parts Include:

- A. J-Box
- B. Round Head Screw
- C. Mounting Bracket
- D. Canopy
- E. Plastic Screw
- F. Black Cord
- G. Finial
- H. Connector
- I. Electrical wire
- J. Self-tapping Screw
- K. Ceiling

NOTICE:

Installation is recommended by a qualified electrician.

HAZARD: Installing this fixture improperly is dangerous and may cause permanent damage !

To Connect With
J-box Electrical wires

AC PHASE OR TRIAC
DIMMER SWITCH



To Connect With The
Fixture Electrical wires +

To Connect With The
Fixture Electrical wires -

Reference Picture of LED Driver

Installation Instruction :

1. Shut off the main electrical supply.
2. Fix the Mounting Bracket (C) to the J-Box (A) and Ceiling (K) with the Round Head Screw (B) and Self-tapping Screw (J).
3. Connect the Electrical wires (I) with the Electrical wires of J-Box (A) and secure with Connector (H).
4. Loosen the Plastic Screw (E), adjust the height of Black Cord (F) according to personal preference, and then tighten the Plastic Screw (E).
5. Fix the Canopy (D) to the Mounting Bracket (C) with the Finial (G).
6. Turn on the power switch.