


INSTALLATION INSTRUCTIONS

For Item No.OW-2A-18

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

Fig. 1

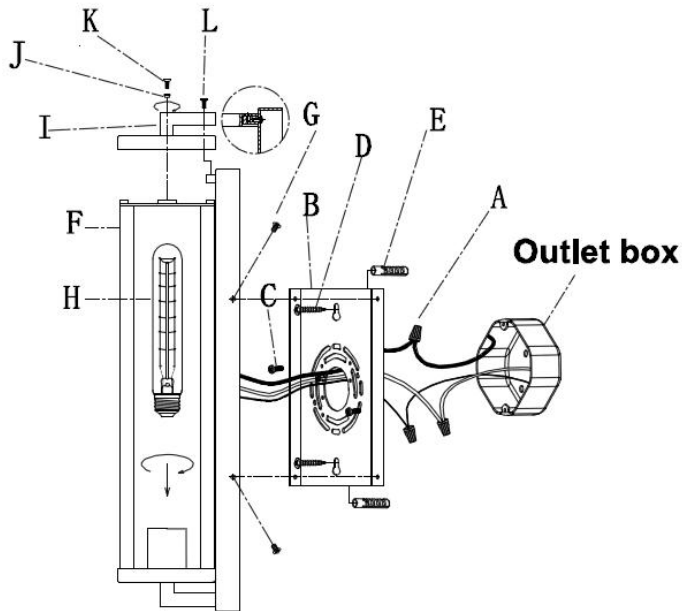

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Position the mounting plate (B) on wall and mark location of two holes on mounting plate where plastic anchors (E) will be inserted. Drill holes into wall and insert plastic anchors (E).
4. Attach the mounting plate (B) to the outlet box with mounting screws (C). If desired, fixture can be mounted to the wall directly by using the two wood screws (D) and threading into plastic anchors (E). All supply wires should be pulled outward through center hole in mounting plate (B).
5. Remove the roof (I) from the fixture (F) by loosening two screws (K) and the top screw (L).
6. Install bulb (Medium base, not supplied), T bulb recommended. Secure the roof (I) on to the top of the fixture (F) with screws (K) and (L).

CONNECTING THE WIRES (Fig. 2).

7. Connect the electrical wires as shown in Fig. 2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)

8. Align the fixture (F) to mounting plate (B) and secure with screws (G).
9. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig. 3)


**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Fig. 2



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	House Wires
White or Ribbed	White (Neutral)
Fixture Wires	House Wires
Bare wire (Ground)	Green or Bare Copper (Ground)

Fig. 3 Sealing

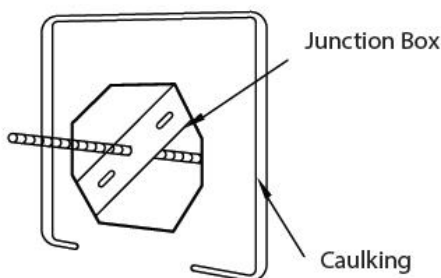

Your installation is now complete. Return power to the junction box and test the fixture.