


INSTALLATION INSTRUCTIONS

Faraday 2 Light Outdoor Wall Sconce

GPLP565133

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

Fig. 1

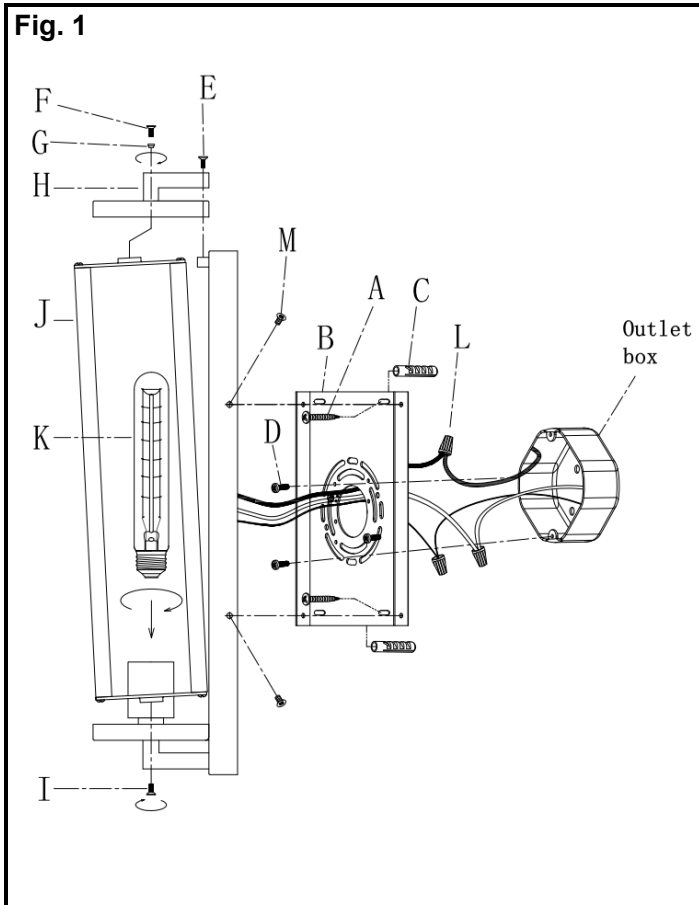

NOTE: INSTALLATION BY A LICENSED ELECTRICIAN IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE (NEC) AND LOCAL REGULATIONS IS RECOMMENDED. ALL PARTS MUST BE USED AS INDICATED IN THESE INSTRUCTIONS.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Remove the roof (H) from the fixture by loosening two screws (F), the top screw (E) and two bottom screws (I). Then take down the housing (J) and take off all the protective corrugated cardboard.
4. Install bulb (Medium base, not supplied, shown with T bulb). Then put the housing (J) back and secure the roof (H) on to the top of the fixture with screws (F) and (E), also secure the bottom with screws (I).
5. Position mounting plate (B) on wall and mark location of four holes on mounting plate (B) where plastic anchors (C) will be inserted. Drill holes into wall and insert plastic anchor (C).
6. Attach mounting plate (B) to outlet box (not included) with mounting screws (D). And install the four wood screws (A) into the plastic anchors (C).

CONNECTING THE WIRES (Fig. 2).

7. Connect the electrical wires as shown in Fig. 2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)

8. Align the fixture to mounting plate (B) and secure with screws (M).
9. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig. 3)

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 2



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	House Wires
White or Ribbed	White (Neutral)
Fixture Wires	House Wires
Bare wire (Ground)	Green or Bare Copper (Ground)

Fig. 3 Sealing

