


Designed by Robert Dudley Best

### PRODUCT



### COLOURS

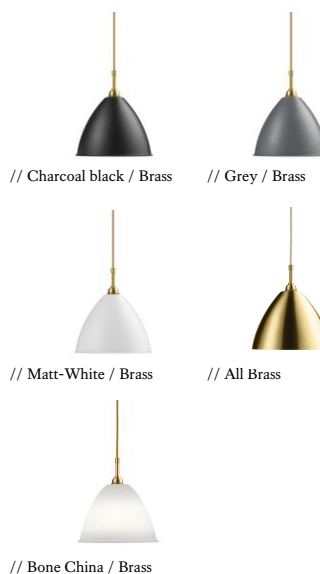

Don't polish the brass

### DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE PENDANT, BL9M

Shade: Charcoal black, Matt-White, Grey, Brass, or Bone China  
Tube and ceiling cup: Brass with lacquered surface  
Fabric wire - Brass colour

Colour codes are indicative.

- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 10 / Gloss level 20
- Grey/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 10 / Gloss level 20
- Brass/Brass / White inside // - / RAL 9003 // - / Gloss level 20
- Matt-White/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 10 / Gloss level 20

Please contact us for other colours or finishes.

### VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**



### FACTS

#### MEASUREMENT - L X W X H MM

Lamp rosette height: 1,3 inches  
Lamp rosette diameter: Ø4,7 inches  
Shade height: 7 inches  
Shade diameter: 8,3 inches  
Cord - total length w/sw: App. 98,4 inches  
Cord - exposed out of lamp: App. 77,9 inches

#### WEIGHT ITEM - LAMP INCL. WIRE

535 g

#### PACKAGING TYPE

White cardboard box w/ 5ply corrugated

#### PACKAGING MEASUREMENT - L X W X H CM

L: 10,2 x W: 15,7 x H: 13,4 inches

#### WEIGHT PACKAGING - MATERIAL TYPE

- Bestlite brochure 120 x 170 mm: 66,5 g
- Paper Egg crate: 456,5 g
- Umbraco key: 5 g
- PE polybag: 1 g
- PE polybag: 60 g
- Cardboard inside: 38 g
- Cardboard outside: 532 g

#### WEIGHT PACKAGING - TOTAL

1629 g

#### NUMBER OF PARCELS

1 pcs.

#### LIGHT SOURCE:

- Socket: E12 base
- Recommended light source: *All LED and fluorescens light bulbs*
- Recommended wattage: 9 W ~ (40 WATT incandescent bulbs)
- Max wattage: 13 W

#### Recommended light source: *Halogen light bulb*

- Recommended wattage: 28 W ~ (40 WATT incandescent bulbs)
- Max wattage: 30 W

- *All lamps can be fitted with a dimmer.*

*Please contact your local electrician.*

- *Lightbulb not included*

## CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

## ACCESSORIES

-

## ENVIRONMENT

-

## TESTS

-

## CERTIFICATION AND LABELS

### CUL-APPROVED



### STANDARD

### STOCK - BL9M PENDANT

- US voltage: 120 V
- Frequency: 60 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



UL listed

Class II / Double insulated

### KOMPONENTS

- 02 // Shade Ø21 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube

### MATERIAL

Shade: Charcoalblack, White or Grey  
Ceiling cup: Brass with lacquered surface  
Textile covered cord

Shade: Brass with lacquered surface  
Ceiling cup: Brass with lacquered surface  
Textile covered cord

## INSTALLATION INSTRUCTIONS

Instructions document: No. 10-20-007-01.

**Technical information:**  
Light sources: CAUTION! TO REDUCE THE RISK OF FIRE, USE MAX. 60W and E14, 40 WATT INCANDESCENT, E12, type B bulbs 120V 60Hz AC ONLY.  
Alternatively max. 30W halogen bulb.

B/LX, 70W INCANDESCENT, E14, type A bulb 120V 60Hz AC ONLY.  
Alternatively max. 30W halogen bulb.

B/LXL, 150W INCANDESCENT, E14, type A bulb 120V 60Hz AC ONLY.  
Alternatively max. 100W halogen bulb.

Turn power off when changing light bulb.  
The lamp is not approved for outdoor use or use in damp/wet rooms.

**Some advice on cleaning your Bestlite:**  
**Powder coated parts – base/bracket and shade:**  
Wipe the parts with a damp cloth soaked in warm water and a bit of mild detergent.

**Chrome plated parts:**  
Wipe the lamp with a damp cloth and wipe dry to bring up luster.  
If the surface is badly scratched use a metal polish made especially for chromium or other soft metals.  
Use only soft cloth for wiping and polishing; never sponges or steel wool.  
Do not use abrasive household cleaners.  
Do not use acidic or alkaline cleaning materials, glass cleaner or household ammonia.

BESTLITE • GUBI, Kløvdalssvej 7-9, DK-2150, Nordhavn, Denmark • [www.gubi.com](http://www.gubi.com)

001-093m

**BESTLITE**  
— BY GUBI —

Dear Bestlite customer,  
Congratulations on your Bestlite!  
You have chosen a genuine design classic, which has been in continuous production for more than 75 years.  
On the other side of this leaflet you will find some useful instructions for the use of your Bestlite.  
Should you have any questions, please feel free to e-mail us at [info@gubi.com](mailto:info@gubi.com) or visit us at [www.gubi.com](http://www.gubi.com).

Best regards,  
Bestlite

1: Shade  
2: Cordset  
3: Internal ring  
4: Light bulb

When attaching pendant to ceiling box

1: Shorten cable to appropriate length and fasten screw on the stem.  
2: Connect wires to power cables. Beware: Green to ground.  
3: Fasten screws to ceiling box.  
4: Push canopy up and tighten set screw (see 3. on opposite page).

When attaching pendant directly to ceiling

1: Shorten cable to appropriate length and fasten screw on the stem.  
2: Attach canopy holder to ceiling with screws.

3: Push canopy up and tighten set screw.  
4: Connect wires to power cables. Beware: Green to ground.

10-20-007-01 Mounting instr BL 95-84-XL US

