


ASSEMBLY & INSTALLATION INSTRUCTIONS

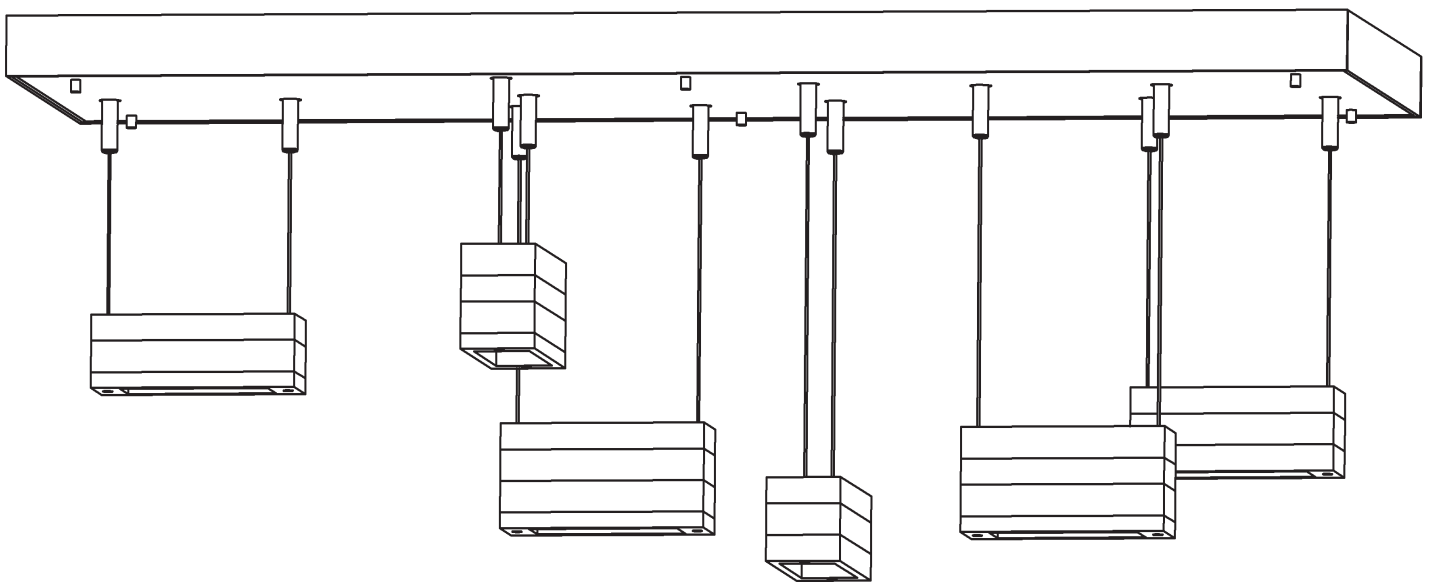

ASSEMBLY & INSTALLATION INSTRUCTIONS

COMPONENT PARTS

A	Canopy
B	Knobs with Threaded Studs (6)
C	Canopy Cover Plate
D	#10 Wood Screws (8)
E	Cupped Washer
F	Ground Screw
G	Gripper Covers (12)
H	Grippers (12)
I	Stacks Accent 1
J	Supply/Support Cable (12)

ASSEMBLY & INSTALLATION INSTRUCTIONS

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

INSTALL CANOPY AND MAKE CONNECTIONS (Figure 1)

1. Carefully unpack the canopy (A) from the carton.
2. Remove knobs with threaded studs (B) and canopy cover plate (C). Set aside for later use.
3. Thread the wires in the electrical box through the hole in the canopy (A) while moving into position over electrical box.
4. Using machine screws (not provided), attach canopy (A) to electrical box.
Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
5. Using #10 wood screws (D), attach canopy (A) to a structural member in the ceiling.
Note: It may be necessary to pre-drill 1/4" holes where screws (D) are being installed. Wood screws are supplied with your fixture; however, different materials and/or construction methods may require different fasteners. If in doubt, contact a qualified electrician. Do not rely on outlet box to support fixture.
6. Attach a pigtail lead to canopy (A) using the cupped washer (E) and ground screw (F) that comes attached to canopy.
7. Using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white and black to black).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRES ARE EXPOSED.


8. While holding canopy cover plate (C) close to canopy (A) connect all ground wires (green or bare copper to green or bare copper).
9. Raise canopy cover plate (C) completely and secure to canopy (A) using the knobs with threaded studs (B).
Note: Be sure no wires or cables are pinched between cover plate and canopy.
10. Instructions on following page to complete installation.

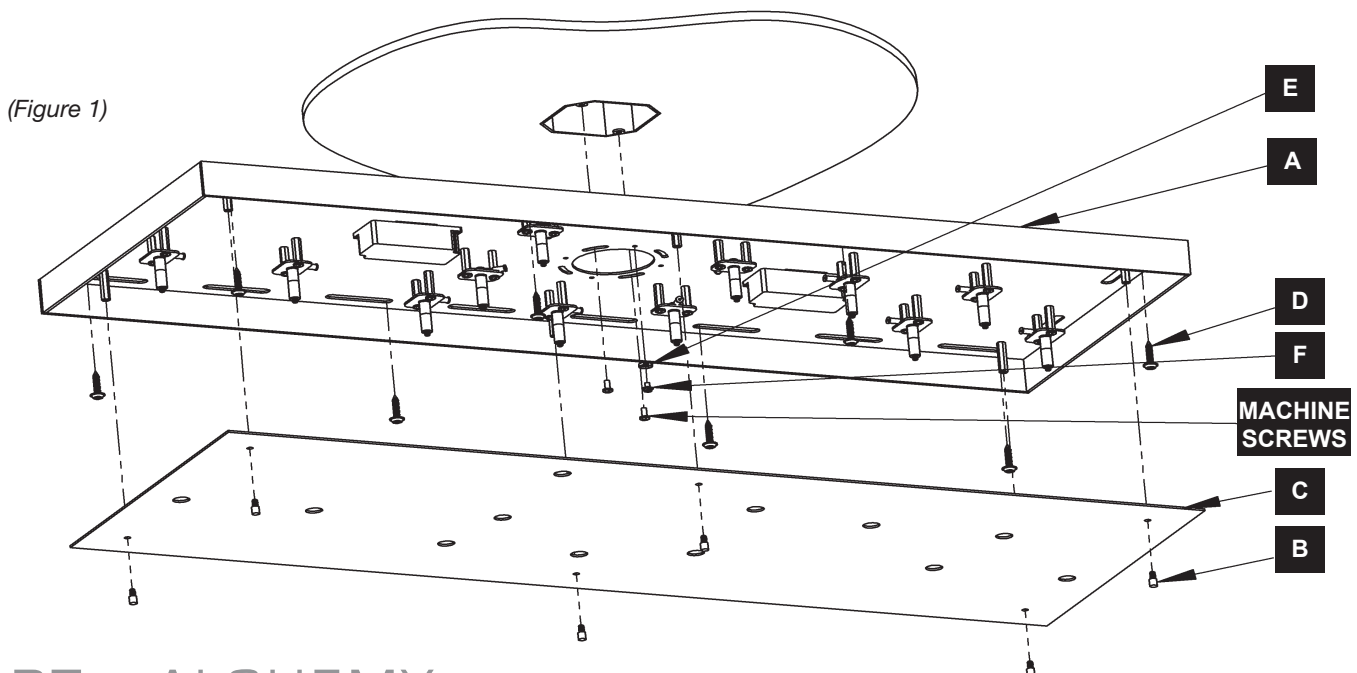


ASSEMBLY & INSTALLATION INSTRUCTIONS

TO INSTALL STACKS ACCENTS (Figures 2 & 3)

1. Unscrew gripper covers (G) from all grippers (H) on canopy (A).
2. Locate stack accent 1 (I) and uncoil the supply/support cables (J) to find the (+) and (-) cable. Locate the position of stack accent (1) on canopy (A) by using Figure 2 and the labels provided.
3. Slide a gripper cover (G) onto each of the supply/support cables (J) with the small opening first.
4. Align the (+) cable (J) of stack accent 1 (I) with the (+) gripper (H) and the (-) cable with the (-) gripper. Slide supply/support cables (J) through the grippers (H) until the desired height of stack accent 1 (I) is reached.
Note: To lower accent piece depress the gripper plunger and pull supply/support cable out until desired height is reached.
5. Repeat steps 2 - 4 for the remaining stacks accent pieces 2 - 6.
6. Trim the supply/support cables (J) close to the grippers (H). Raise the gripper covers (G) and thread them on the grippers (H).
Note: Once supply/support cables (J) are cut the accent pieces can no longer be lowered. Make sure desired height is reached before cutting cables.
7. Restore electricity at main breaker.

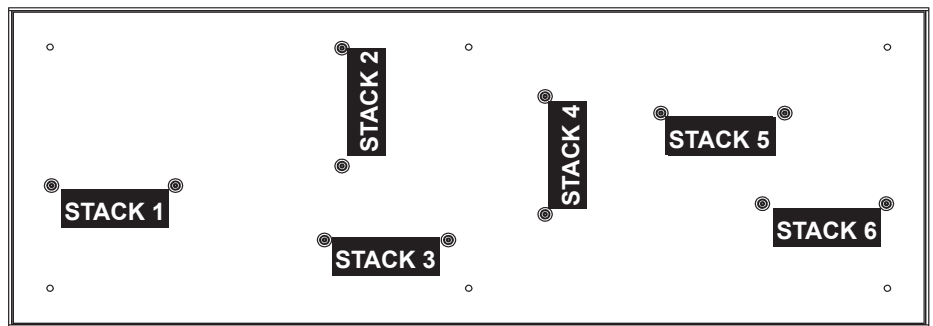

(Figure 2)

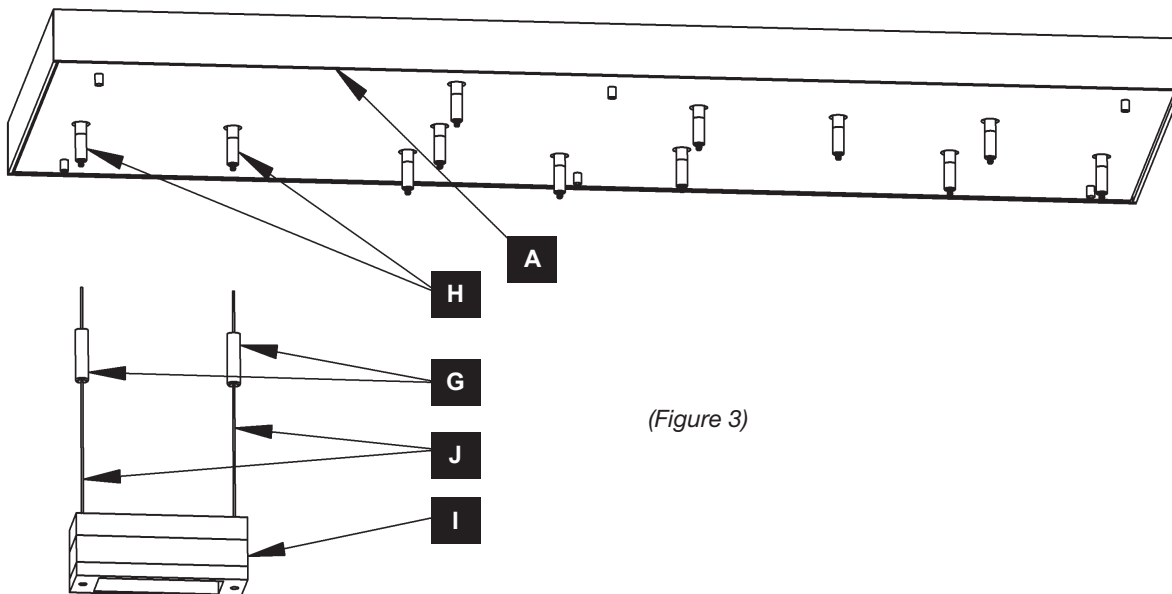

(Figure 3)

If you need further assistance, or find that you are missing any parts, please contact the showroom from which you purchased this product. We hope you enjoy your fixture!

***ART+ALCHEMY will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**