


HITEAK

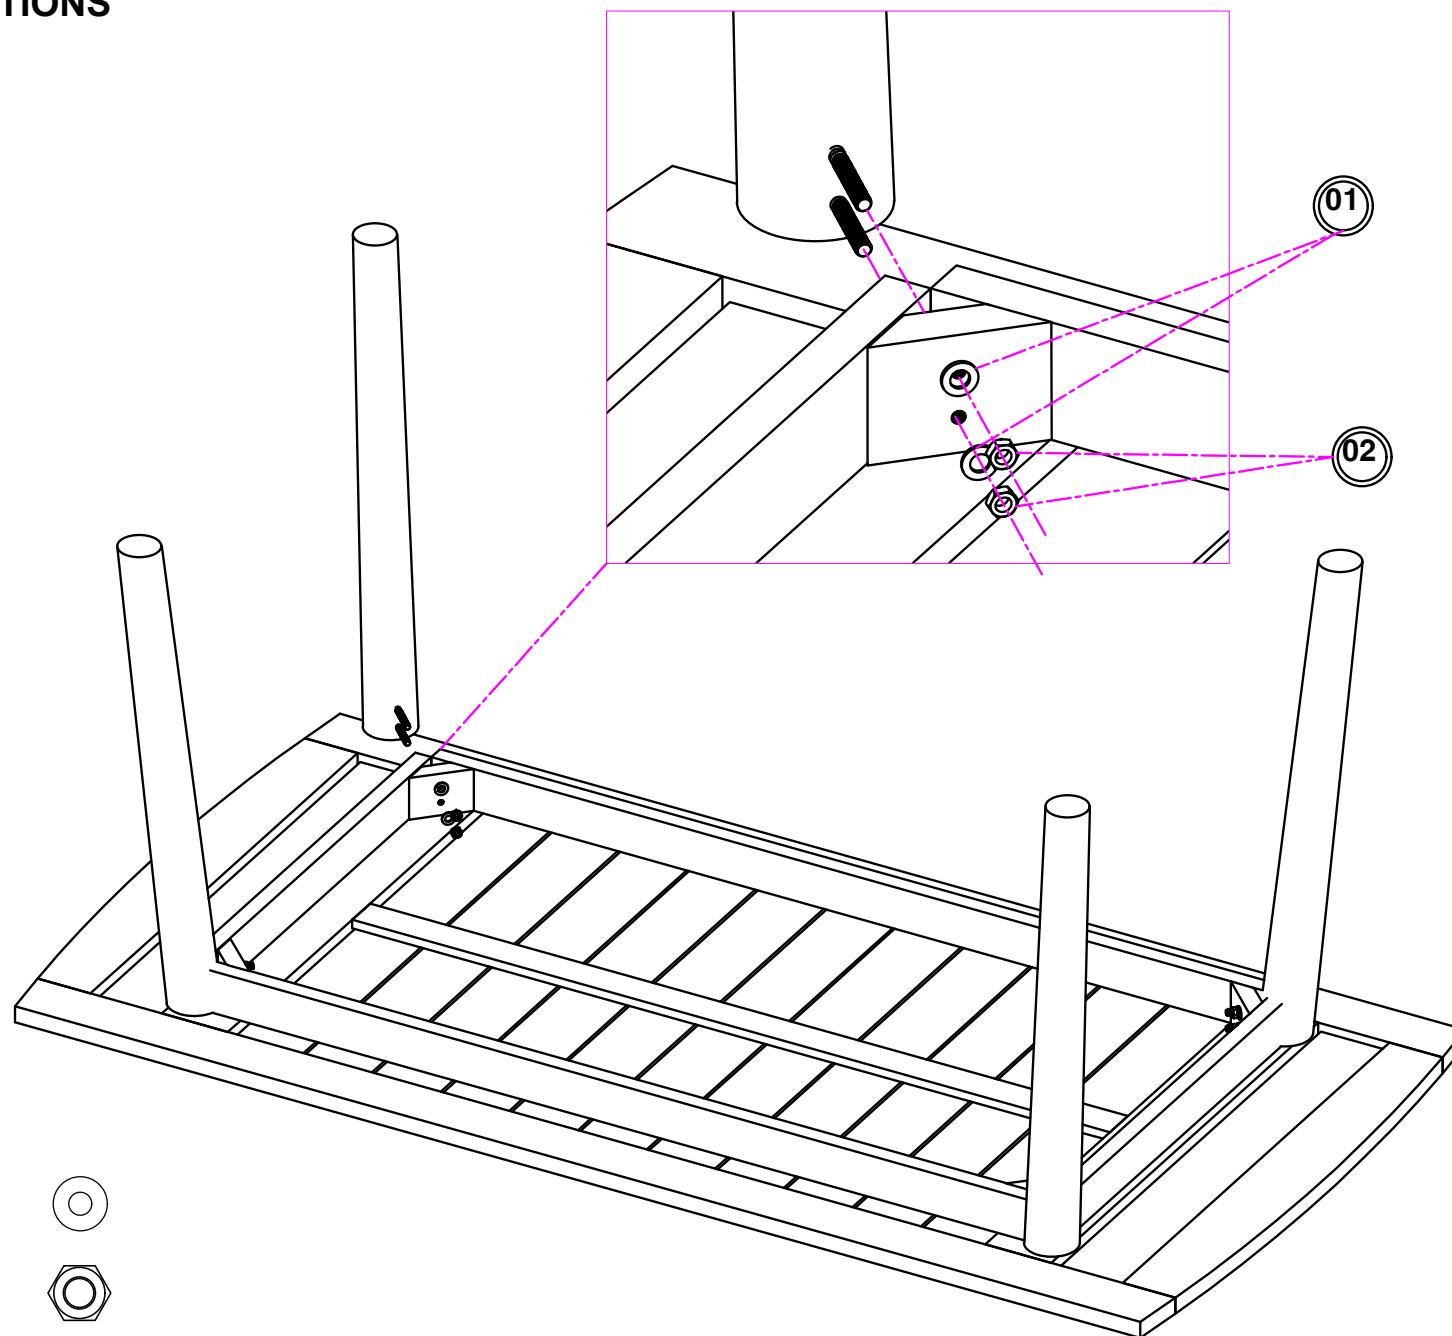

HARDWARE

1) Washer: 8 Pcs 

2) Nut: 8 Pcs 

*) Wrench M17: 1 Pc 

HLAC464 ASSEMBLY INSTRUCTIONS

HITEAK

How To: Install Mesh Fabric into Frame

Back piece: Simply insert the two ends onto the sides of the wooden chair.

Seating piece:

- Insert the mesh fabric onto the side holes of the seating first,
- Slowly insert the wooden sticks into the side holes of the seating.
You can use a hammer to slightly tap the wooden sticks into place.

info@hiteakfurniture.com

(714) 998-0088

www.hiteakfurniture.com