

INSTALLATION INSTRUCTIONS:

PLEASE READ THESE INSTRUCTIONS CAREFULLY AND SAVE THEM, AS YOU MAY NEED THEM AT A LATER DATE.

WARNING: Failure to install and wire fixture in accordance with the National Electrical Codes (NEC), all applicable Federal, State and Local electrical codes, as well as Specific U.L. safety standards for the intended working environment (location/application) may cause serious personal injury, death and/or property damage. This product must be installed by a person familiar with the construction and operation of the product and the hazards involved.


CAUTION: TURN OFF POWER FROM THE MAIN CIRCUIT BEFORE INSTALLING FIXTURE. Make sure fixture is grounded per National Electrical Codes (NEC).

Caution: These fixtures are intended to be mounted to a metal outlet box. The box must be directly supported by the building structure. This fixture is suitable for wet location.

Important Note: The safeguards and instructions appearing in this page, are not meant to cover all possible conditions and situations that may occur. It may be understood that common sense, cautions and care are factors, which cannot be built into any product. The person(s) installing, operation and responsible for the light fixture, must execute these factors.

Warning: For use on 120~277V 50/60Hz circuits only. Risk of fire and electrical shock. Most dwellings built before 1985 have supply wires rated 60 degrees c. Consult a qualified electrician before installing. If supply wires are located within 3 inches to the ballast use wires rated at least 90 degrees C.

ASSEMBLY AND INSTALLATION:

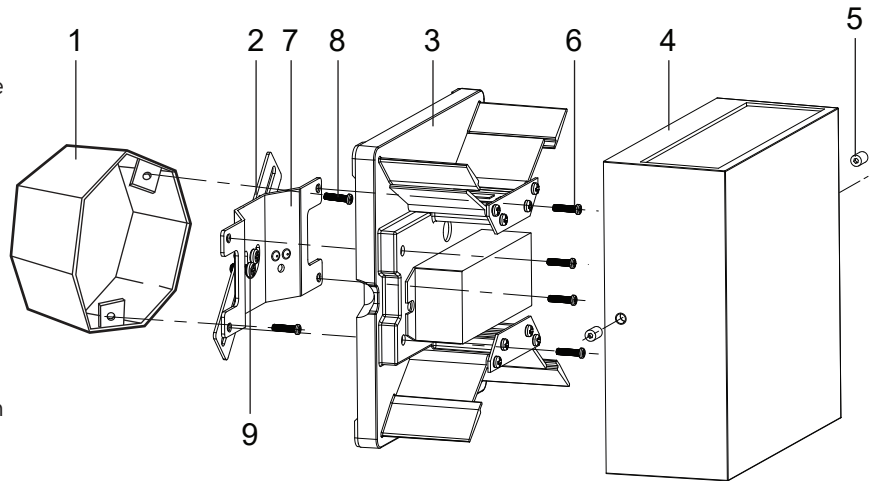

Step 1 - Preparing for installation.

- A. Disconnect electrical power at fuse or circuit breaker box before installing or servicing any part of this fixture.
- B. Carefully remove the fixture from the carton.
- C. Remove the frame(4) from the metal base(3) by loosening two screws(5).
- D. Remove the mounting bracket(7) from the metal base(3) by loosening the four screws(6).

Step 2 - Wiring fixture.

- A. Make all wire connections to appropriate wire. Secure with wire nuts (provided).
- B. Connect the green wire from the fixture to the supply power source ground wire. The black wire from the fixture is connected to the black (L) wire from supply power source. The white wire from the fixture is connected to the white (N) wire from supply power source.
- C. Tuck all connections neatly into the outlet box.

Step 3 - Mounting.

- A. Install single bar (2) on the outlet box(1) (not provided) by securing it with two screws (8).
- B. Adjust the angle of mounting bracket(7), then tighten the fastening screw(9).
- C. Install the metal base (3) on mounting bracket(7) by securing it with the four screws (6).
- D. Install frame(4) to the metal base(3) by tightening two screws(5) on left and right to secure it.

Step 4 - wet application.

- A. Apply a small amount of silicone (not included) per manufacturer's recommendation around the perimeter of the frame (4) where it contacts with the surface of the wall or ceiling.

Step 5 - Turn power on.