


Installation Instruction

For models series ACR-9731-OPAL, ACR-9732-OPAL, ACR-9733-OPAL

Ceiling lamps

IMPORTANT

- Justice Design recommends that a licensed electrician install this lighting fixture
- Installation must comply with all building, safety, and electrical codes and requirements
- Disconnect power to the junction box prior to installation
- Do not reconnect power until this fixture is properly installed
- This fixture is designed to mount to a standard metal 4-0 octagonal junction box




Hardware Pack contains:

- A. 2 - Mounting Screws
- B. 3 - Anchors


1

Remove finials from the canopy to take the Universal mounting plate down.

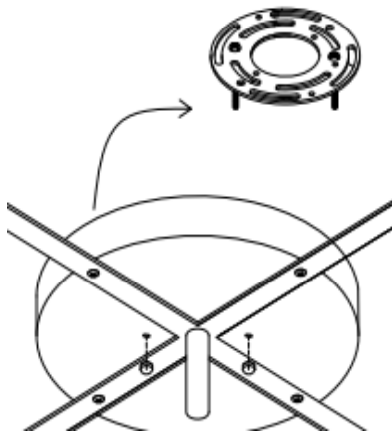


2

Pull fixture wires through center hole of Universal Mounting Ring. Connect fixture wires to supply wires using wire nuts. Observe polarity: black to power, white to neutral, and ground to green ground.

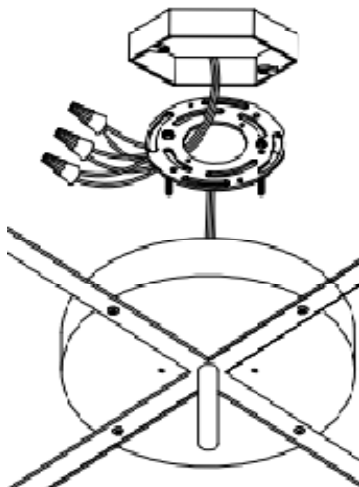


3

Tuck wires and wire nuts into junction box. Attach Universal Mounting plate to junction box using mounting Screws.

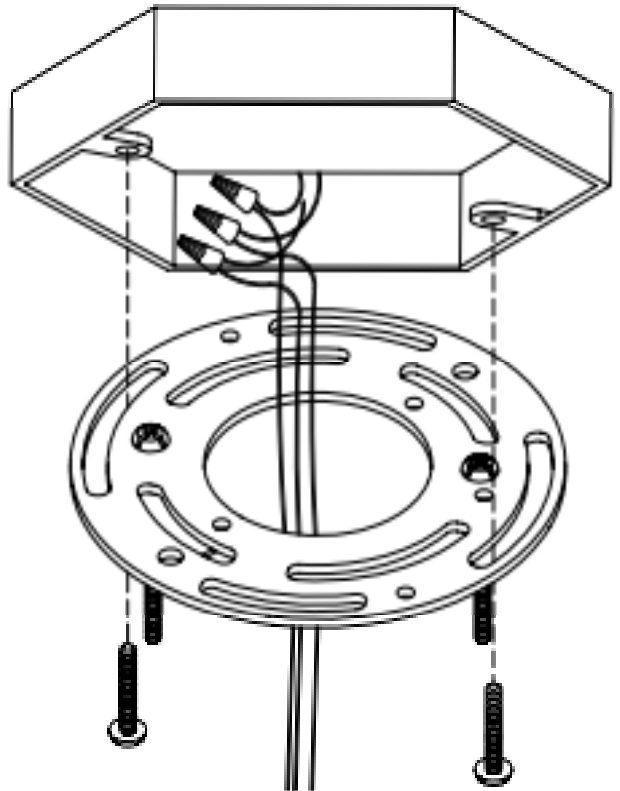


4

Attach canopy to Universal Mounting Plate with two(2) finials. Be careful not to over-tighten Finials or you may damage canopy.

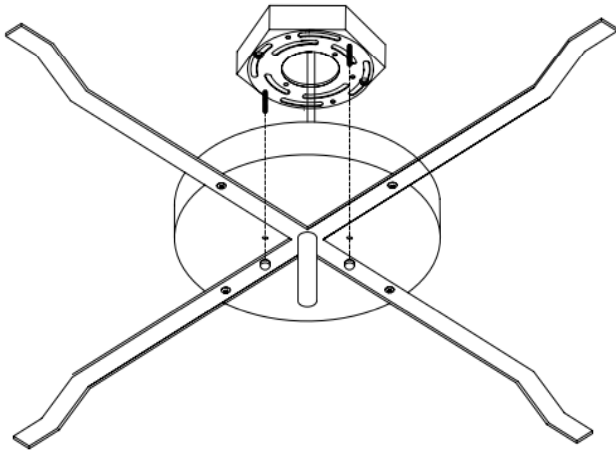


5

Install bulbs, take care never to exceed maximum wattage.

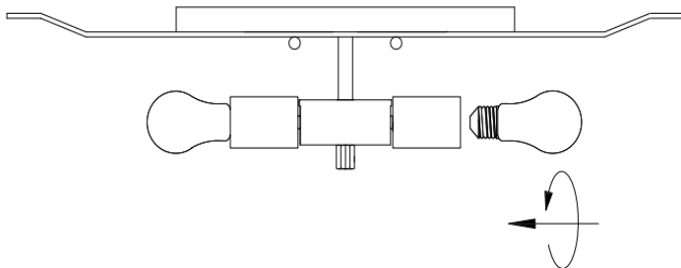


6

Install the nipple and the hex nut and adjust to the appropriate height.

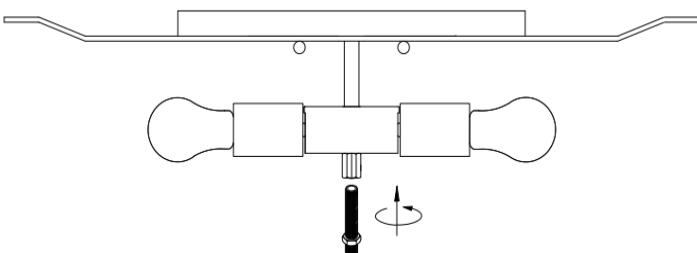

7

Put the metal washer onto the nipple, take the acrylic shade onto the nipple passed through the bottom hole, keeping the acrylic shade up until the 4pcs lamp brackets lowered into the slots on the top of the acrylic shade. then rotating acrylic shade until the acrylic shade cover on the brackets.

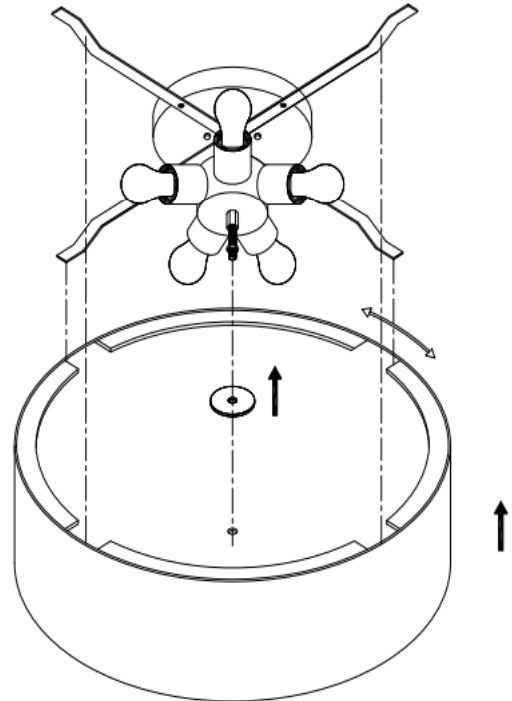

8

Install the hex unit and the mounting metal plate and tighten.

Please see the additional enclosed sheet for care instructions.

