



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528255MG
36 IN PENDANT

I M A G E



If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plaît appel pour l'assistance.


Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Ce produit doit être installé conformément au code d'installation applicable par une personne connaissant la construction et le fonctionnement du produit ainsi que les dangers encourus.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service.
Utiliser
un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.

WIRING DIAGRAM

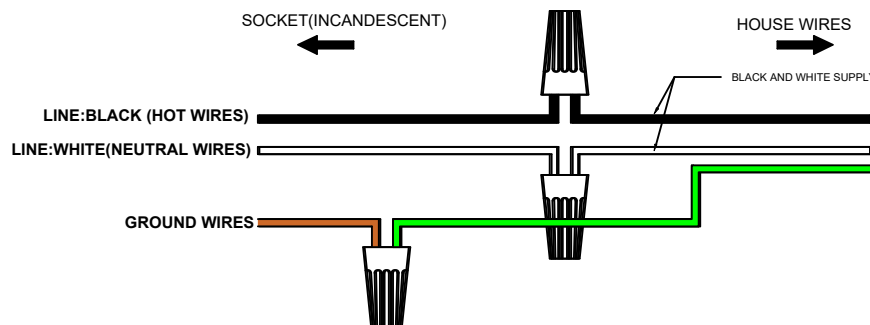


ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528255MG
36 IN PENDANT

KNOCKDOWN ASSEMBLY

STEP 1: Determine the fixture height and attach the corresponding stem lengths to the fixture body (6", 12", and 24").

CAUTION: Carefully pass the wire through the stems, and be careful not to damage the wire insulation to prevent electrical shock and failure.

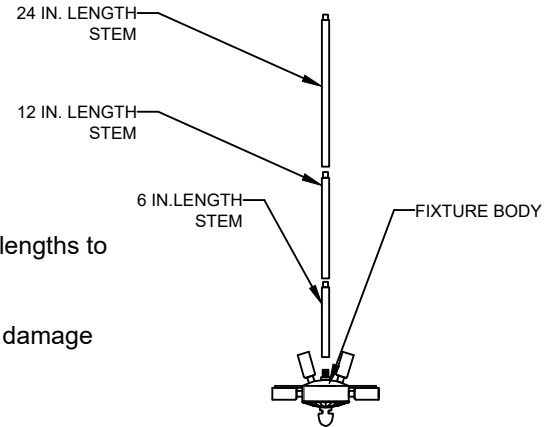

ELECTRICAL / MOUNTING INSTALLATION



STEP 2: Attach mounting plate to outlet box with the (2) 8-32 x 3/4" screws(provided by other).

STEP 3: Connect bare ground wire from the outlet box (if supplied) with connectors.

STEP 4: Refer to wiring diagram. With wire carefully threaded through the swivel, connect the black supply wire to the black fixture wire with wire connector, and connect the white supply wire to the white fixture wire with wire connector.

STEP 5: Carefully tuck all wires into outlet box ensuring that there are no wires pinched between the canopy and ceiling.

STEP 6: Cap the canopy to the mounting plate, make sure that it rests firmly on the ceiling then lock using the swivel ring.

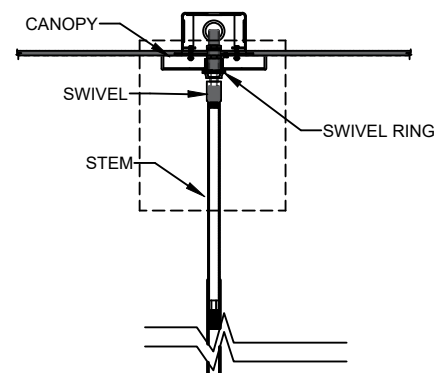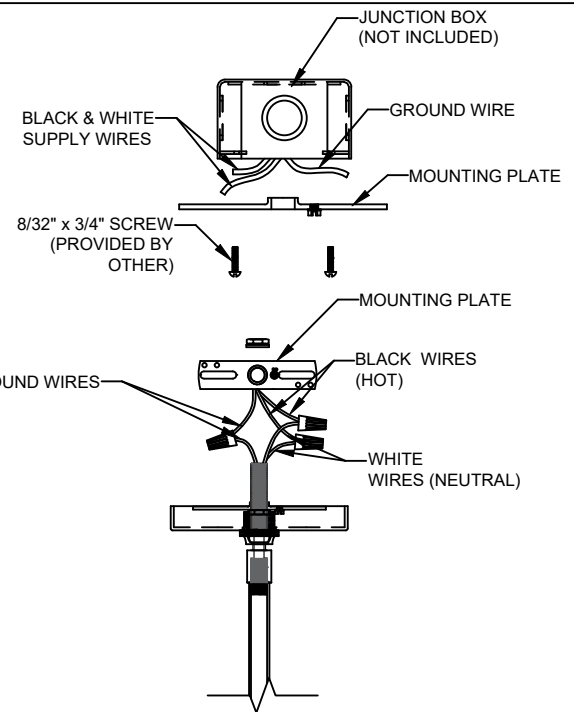


FOR LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.
- Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.
- Always refer to the Assembly Instruction before removing any components.
- HANDLE WITH CARE.

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528255MG
36 IN PENDANT

ELECTRICAL / MOUNTING INSTALLATION

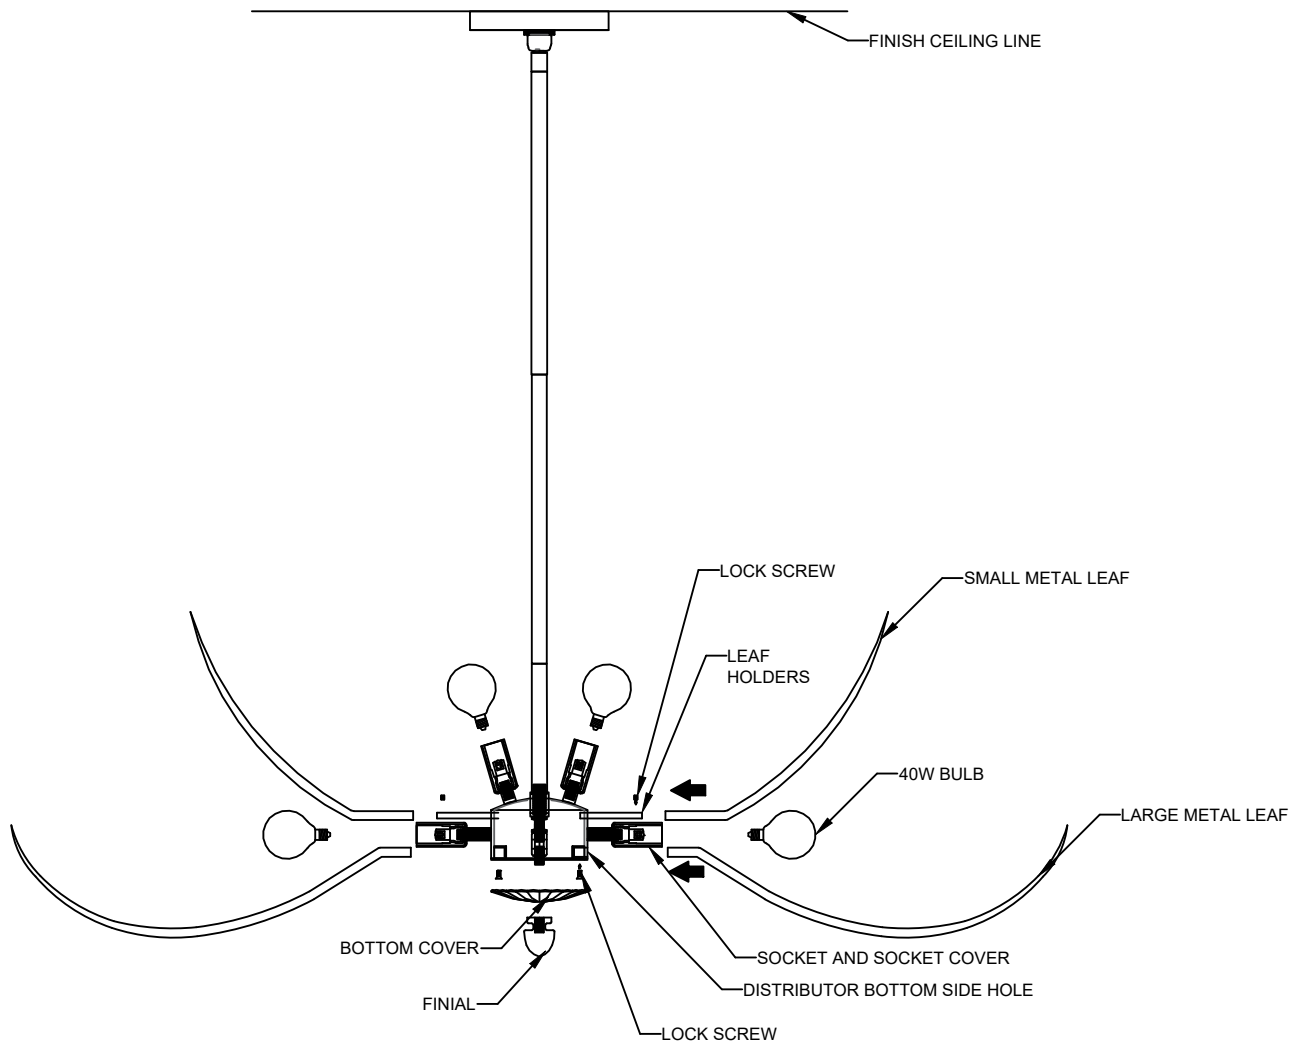











- STEP 7:** Attach all of the large metal leaves to the bottom side holes on the distributor and secure using the provided allen screws.
- STEP 8:** Attach all of the small metal leaves to the upper leaf holders (located at the top of the distributor) using the provided allen screws.
- STEP 9:** Attach the bottom cover and finial, and install the (14) E12 base bulbs. Do not use bulbs that exceed 40 Watts.

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528255MG
36 IN PENDANT

PARTS LIST

IMAGE	PARTS NAME	QTY
	Mounting Plate	1 PC
	Hex Nut	2 PCS
	Stem	1 SET
	Canopy	1 PC
	Swivel	1 PC
	Threaded Nipple	1 PC
	Star Washer	1 PC
	Allen Wrench	1 PC
	Small Metal Leaf	6 PCs
	Large Metal Leaf	8 PCs