

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** WS14935-WH - Chute

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL/Wall Sconce

**Luminaire Cat:** WS14935-WH

**Lamp:** DC LED w/ Driver

**Lamp Cat:** N/A

**Ballast Desc:** IN:100-130VAC 50/60Hz,0.21A;OUT:31-44VDC,400mA, 20W(max)

**Ballast Cat:** HUEUC DC-CC-20

**Lamp Output:** Total luminaire Lumens: 957.7

**Max Candela:** 262.2 at Horizontal: 357.5°, Vertical: 90°

**Input Wattage:** 16.4

**Luminous Opening:** Rectangle (L: 0.79", W: 35.83")

**Test:** 1360-19

**Test Date:** 10 October 2019

**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C


**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 7 X 6



### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	63.2	6.6%
0-40	109.7	11.5%
0-60	234.3	24.5%
60-90	244.6	25.5%
70-100	254.5	26.6%
90-120	244.6	25.5%
0-90	478.9	50%
90-180	478.8	50%
0-180	957.7	100%

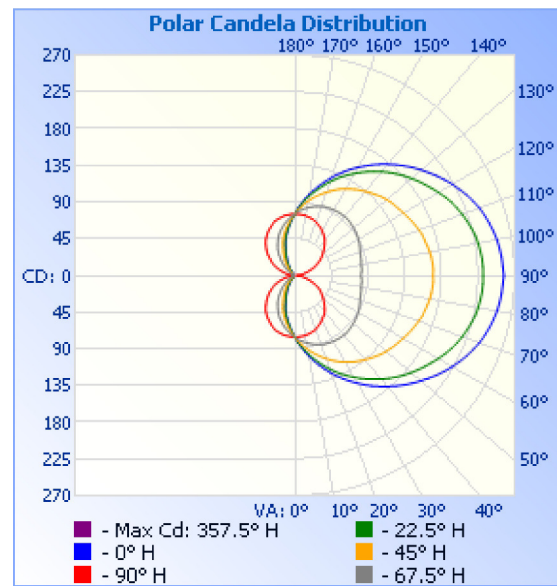

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	7.2	0.8%	90-100	86.0	9%
10-20	21.4	2.2%	100-110	82.5	8.6%
20-30	34.6	3.6%	110-120	76.1	7.9%
30-40	46.5	4.9%	120-130	67.3	7%
40-50	57.3	6.0%	130-140	57.3	6%
50-60	67.3	7.0%	140-150	46.5	4.9%
60-70	76.1	7.9%	150-160	34.6	3.6%
70-80	82.5	8.6%	160-170	21.4	2.2%
80-90	86.0	9.0%	170-180	7.2	0.8%

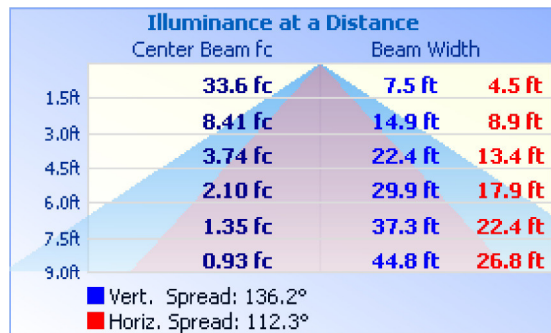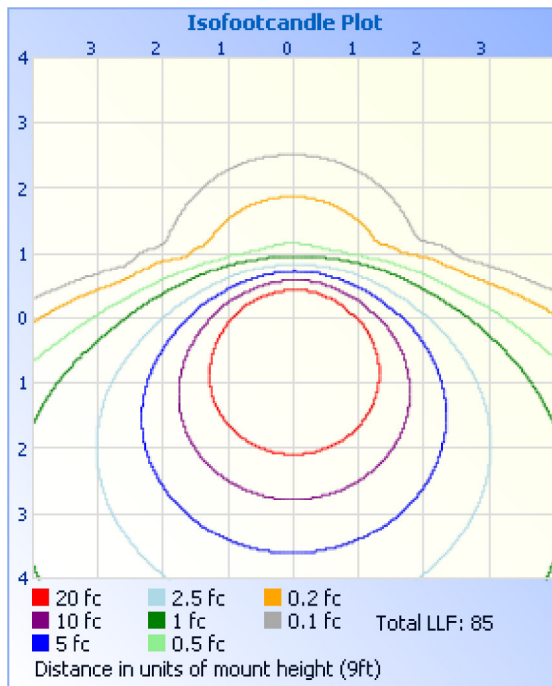

Reported data calculated from manufacturer's data file, based on IES recommended methods.