


SILO 2 WALL




- Please read entire manual before installation
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site
- Should be used exclusively as a lamp and not as a shelving, display or hanging unit

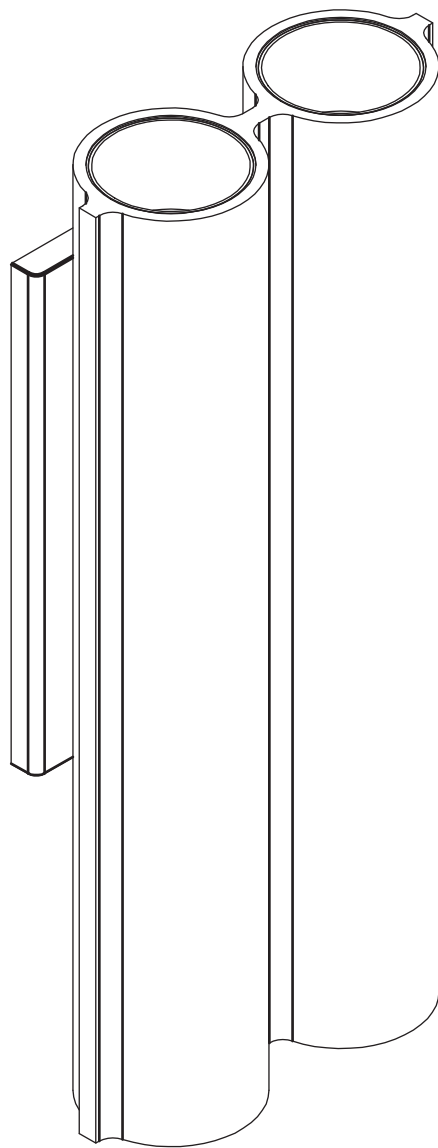

**NEVER TURN ON POWER SUPPLY
UNTIL CONNECTIONS AND
INSTALLATION ARE COMPLETED.
DOING OTHERWISE COULD BE
HARMFUL TO YOUR LUMINAIRE.**


1

Using the provided allen key, unscrew the locking screw then lift and pull luminaire out of the keyholes.

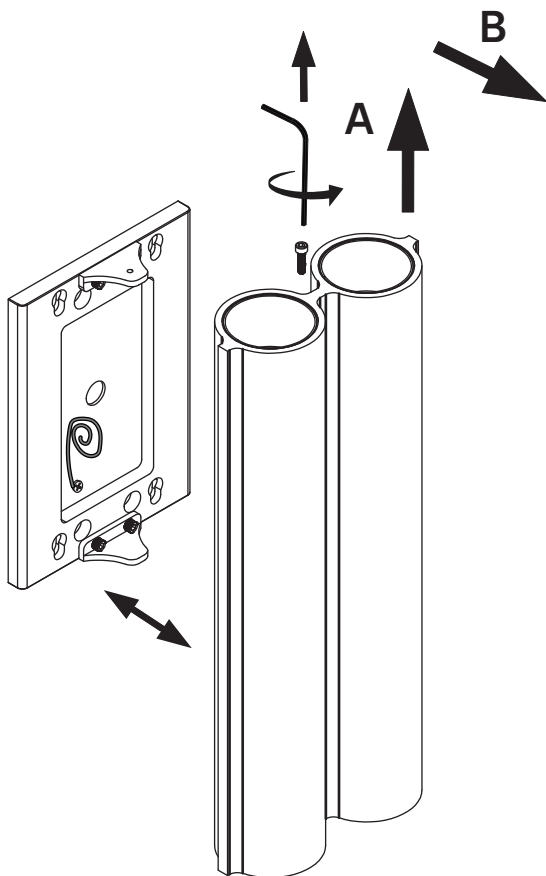

2

Mark two diagonal anchor points, then mount bracket to wall. Make sure the installation is level.

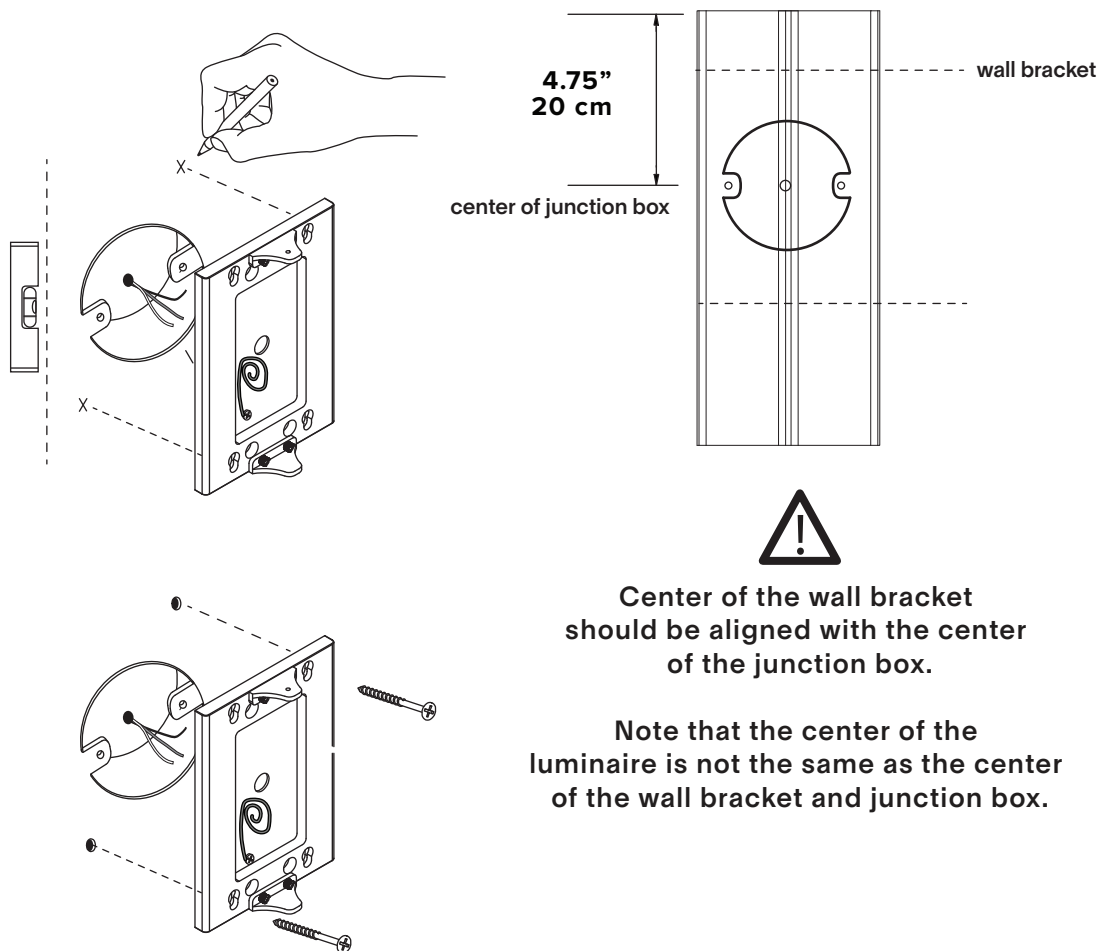


* Use appropriate anchors


3

Make connections inside luminaire or inside electrical box (if applicable).


Use provided anti-abrasive heat sleeve.

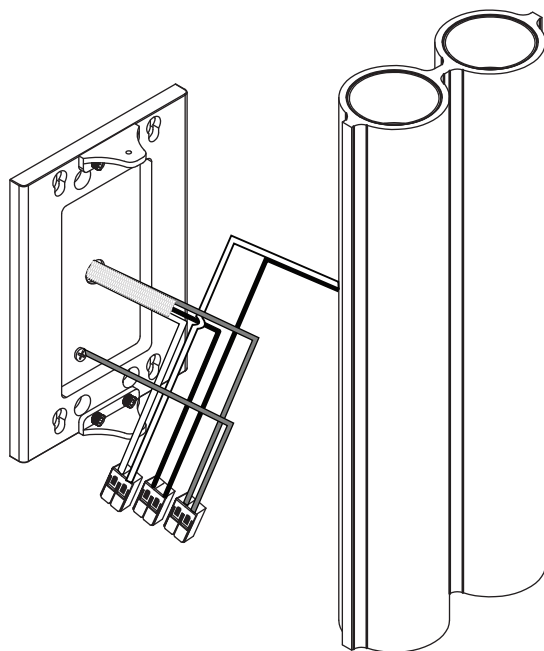

for 120 V wiring



for 220-240 V wiring


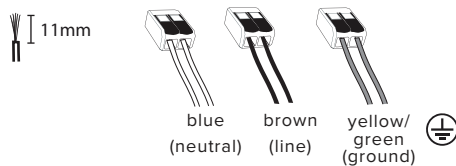


If applicable, use grey and purple wires for 0-10V dimming circuit, or the orange wires for DALI dimming circuit before closing the driver enclosure.

4

Prescrew the screw halfway onto the wall bracket (A).

Fix luminaire to wall bracket using keyholes (B,C).

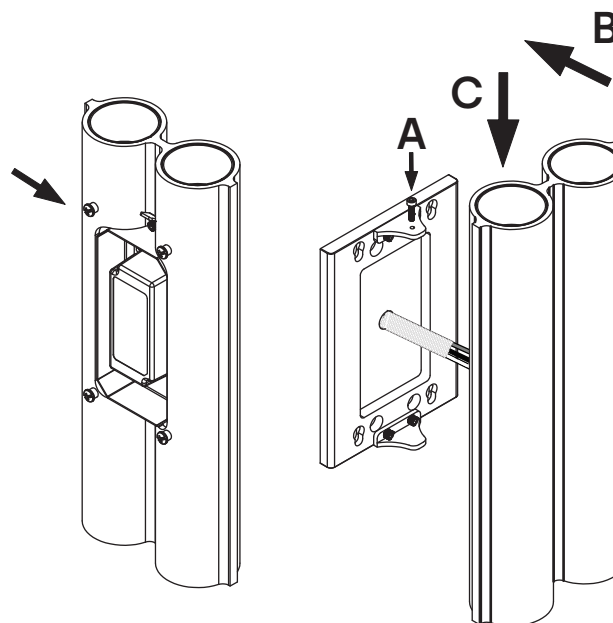

5

