

CIRQUE

Designed by Clara von Zweigbergk



Description The fixture provides a downward glare-free soft light by means of the white lacquered inner reflector.

Variants	VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
	5741919772	COPPER, 928	15 / 18.8 / 15 IN / 9.2 LB
	5741919785	RED, 078	15 / 18.8 / 15 IN / 4.9 LB
	5741919798	YELLOW, 074	15 / 18.8 / 15 IN / 4.9 LB
	5741919808	COPPER, 928	8.7 / 11.6 / 8.7 IN / 4.2 LB
	5741919811	RED, 078	8.7 / 11.6 / 8.7 IN / 2.6 LB
	5741919824	YELLOW, 074	8.7 / 11.6 / 8.7 IN / 2.6 LB
	5741919837	COPPER, 928	5.9 / 7.4 / 5.9 IN / 3.0 LB
	5741919840	RED, 078	5.9 / 7.4 / 5.9 IN / 1.9 LB
	5741919853	YELLOW, 074	5.9 / 7.4 / 5.9 IN / 1.9 LB
	5741919895	GREY, 366	15 / 18.8 / 15 IN / 4.9 LB
	5741919905	GREY, 366	8.7 / 11.6 / 8.7 IN / 4.2 LB
	5741919918	GREY, 366	5.9 / 7.4 / 5.9 IN / 1.9 LB

Materials & Finishes **MATERIALS**
Shield: Drawn aluminum.

FINISHES

Grey top, Copper top, Red top, Yellow top, wet painted.

Mounting


Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

Information


Electrical:
 System Wattage: 10W or 22W
 LED Wattage: 9 W or 20 W
 Delivered lumens: 356 - 832
 Efficacy: 35.6 lm/W - 37.8 lm/W
 Certifications:
 cULus, Dry Location
 Protection class IP20
 Controllability: Phase dimming
 Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

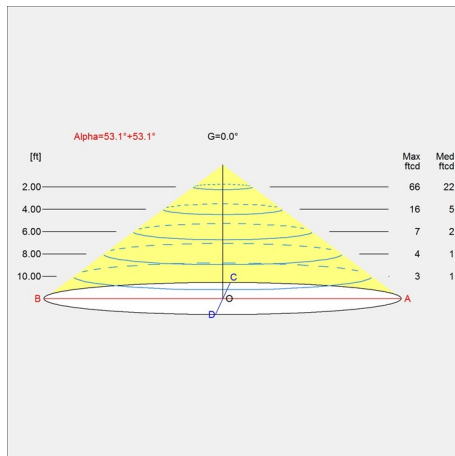

ISOLUX

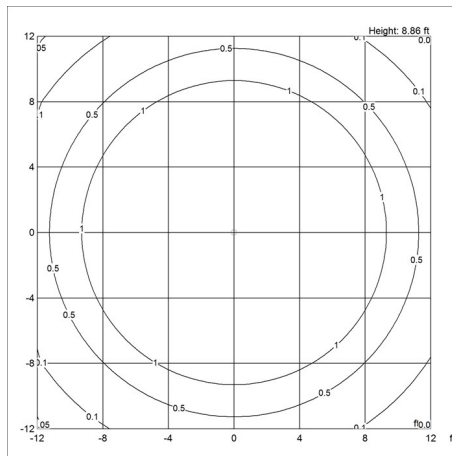

POLAR

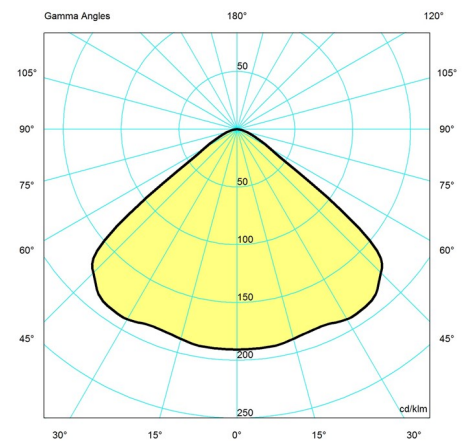

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.

5741919772

LIGHT SOURCE

A-21/medium

VOLTAGE/FRQ

120V

LUMEN

775

FEATURES

-

CABLE

White textile

louis poulsen

5741919785	A-21/medium	120V	775	-	White textile
5741919798	A-21/medium	120V	775	-	White textile
5741919808	A-19/medium	120V	705	-	White textile
5741919811	A-19/medium	120V	705	-	White textile
5741919824	A-19/medium	120V	705	-	White textile
5741919837	A-15/medium	120V	436	-	White textile
5741919840	A-15/medium	120V	436	-	White textile
5741919853	A-15/medium	120V	436	-	White textile
5741919895	A-21/medium	120V	775	-	White textile
5741919905	A-19/medium	120V	705	-	White textile
5741919918	A-15/medium	120V	436	-	White textile

Specification

Notes

a. 5.9 IN size available only in 10W/A-15/medium.

b. 8.7 IN size available only in 15W/A-19/medium.

c. 15 IN size available only in 22W/A-21/medium.