

PANTHELLA 320 TABLE LAMP

Designed by Verner Panton



Description

The fixture emits a soft, comfortable, glare-free, light. The metal-shade versions direct the light directly downward, creating a pleasant illumination due to the inner white-painted shade and the reflection from the trumpet-shaped stem. The opal acrylic produces a diffused, comfortable light due to the translucent shade, the downward reflection from the inner shade, and the reflection from the trumpet-shaped stem.

Variants

| VARIANT NUMBER | COLOR, RAL | W / H / L (IN) / W (LB) |
|----------------|---------------------------|--------------------------------|
| 5744908405 | GREY OPAL ACRYL | 12.6 / 17.2 / 12.6 IN / 3.3 LB |
| 5744918000 | WHT OPAL ACRYL, 970 | 12.6 / 17.2 / 12.6 IN / 3.3 LB |
| 5744918055 | HIGH LUSTRE CHROME PLATED | 12.6 / 17.2 / 12.6 IN / 3.3 LB |
| 5744918107 | BRASS METALLISED | 12.6 / 17.2 / 12.6 IN / 3.3 LB |

Materials & Finishes

MATERIALS

Shade: Injection-molded acrylic or deep-drawn steel. Base and housing: Cast aluminum.
Diffuser: Injection-molded opal pmma.

FINISHES

White opal acrylic shade with white stand.

louis poulsen

Gray opal acrylic shade with high-luster chrome stand.
High-luster chrome shade and stand.
Brass metallized shade and stand.

Mounting


Cable type: White for white and brass finishes; Black for other finishes. Cable length: 8'.
Switch: In-line on/off. Diffuser with bayonet lock. For mounting instructions, see download section on the product detail page.

Information


Electrical:
System Wattage: 10W
Delivered lumens: 270 - 367 lm
Efficacy: 27 - 36 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Color Rendering: $R_a \geq 90$
Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

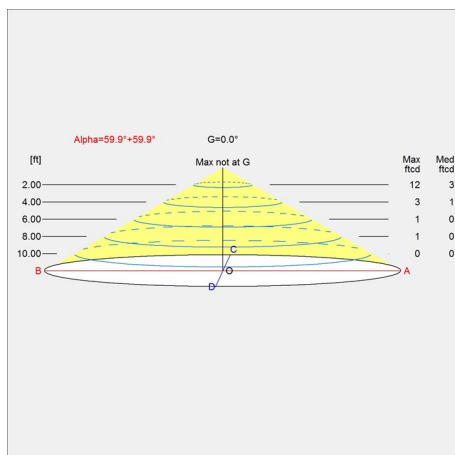

ISOLUX

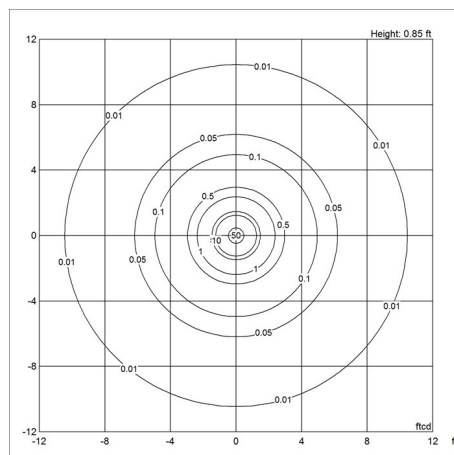

POLAR

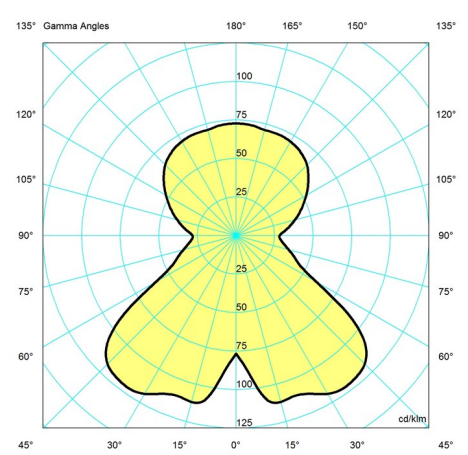

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.

5744908405

LIGHT SOURCE

G16.5/candelabra

VOLTAGE/FRQ

120V/60Hz

LUMEN

367

FEATURES

-

CABLE

Blk

louis poulsen

| | | | | | |
|------------|------------------|------|-----|---|-----|
| 5744918000 | G16.5/candelabra | 120V | 367 | - | Wht |
| 5744918055 | G16.5/candelabra | 120V | 277 | - | Blk |
| 5744918107 | G16.5/candelabra | 120V | 270 | - | Wht |
