

## PANTHELLA 250 TABLE LAMP

Designed by Verner Panton

---



---

### Description

The fixture emits a glare-free, soft and comfortable illumination. The metal shade versions direct the light directly downwards and create a pleasant illumination due to the inner white painted shade and the reflection from the trumpet-shaped stem. The opal acrylic produces a diffused comfortable light due to the translucent shade, the downward reflection from the inner shade and the reflection from the trumpet-shaped stem.

---

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5744162432	BLK, 708	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744162461	WHT OPAL ACRYL, 970	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744162474	ORANGE, 269	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744162513	WHT, 011	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744162555	HIGH LUSTRE CHROME PLATED, 900	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744162937	PALE ROSE	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744167110	BRASS METALLISED	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744168038	GREY OPAL ACRYL	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744612649	PALE BLUE	9.8 / 13.2 / 9.8 IN / 2.6 LB
5744612652	CORAL	9.8 / 13.2 / 9.8 IN / 2.6 LB

---

# **louis poulsen**

## Materials & Finishes

### **MATERIALS**

Shade: Injection-molded acrylic or deep-drawn steel.

Base and housing: Cast aluminum.

Diffuser: Injection-molded opal pmma.

### **FINISHES**

White Opal Acrylic shade with white stand.

Gray Opal Acrylic shade with high-luster chrome stand.

High-Luster Chrome shade and stand.

Metalized Brass shade and stand.

White, Black, or Orange shade and stand, Powder-coated.

---

## Mounting

Cable type: White for brass, pale rose and white finishes; Black for other finishes. Cable length: 8'. LED-driver: Separate, plugs into power outlet. Light control: In-line switch. Auto shut-off timer: 4 hours/8 hours. Continuous dimming from 15% to 100%. For mounting instructions, see download section on the product detail page.

---

## Information

Electrical:

System Wattage: 10W

LED Wattage: 9W

Delivered lumens: 428-589

Efficacy: 42 - 58 lm/W (LED)

Certifications:

cULus, Dry Location

Protection class IP20


Controllability: Continuous dimming by touch switch on cord.

Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.


---

Light distribution diagrams


CARTESIAN

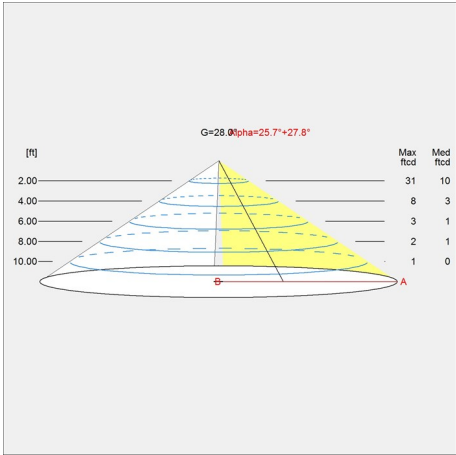

ISOLUX

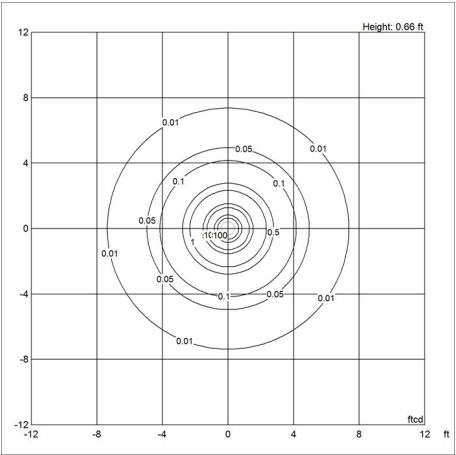

POLAR

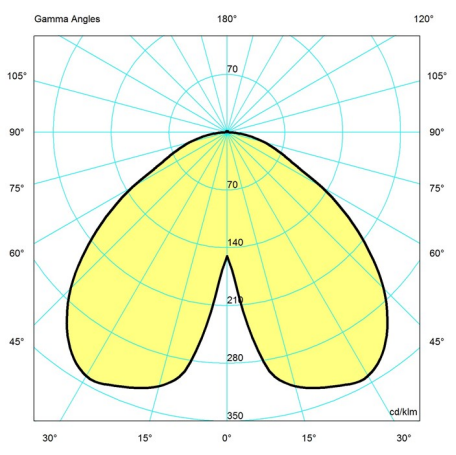

Variant Options      For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5744162432	LED 2700K	120V	428	-	-
5744162461	LED 2700K	120V	589	-	-
5744162474	LED 2700K	120V	428	-	-
5744162513	LED 2700K	120V	460	-	-
5744162555	LED 2700K	120V	428	-	-
5744162937	LED 2700K	120V	428	-	Wht
5744167110	LED 2700K	120V	428	-	Wht
5744168038	LED 2700K	120V	679	-	Blk
5744612649	LED 2700K	120V	428	-	Blk
5744612652	LED 2700K	120V	428	-	Blk