


VL 56 PENDANT

The pendant emits downward directed glare-free light. The radial perforation pattern around the opening creates a softer transition between light and darkness. The perforations create a soft beautiful pattern of light both on the shade and on the surrounding surfaces.

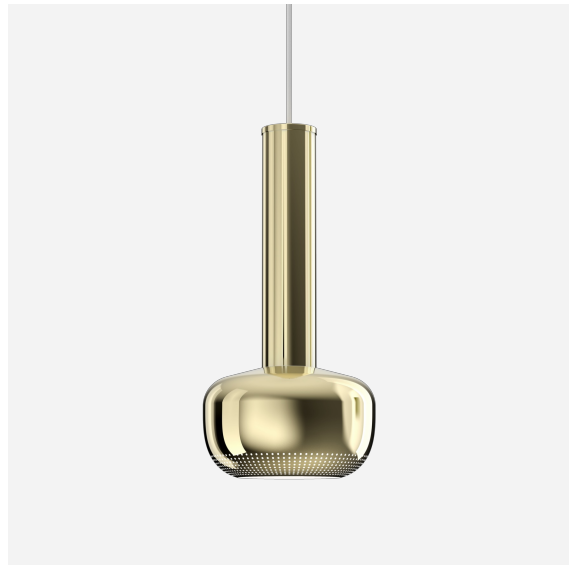

Vilhelm Lauritzen

Vilhelm Lauritzen (1894–1984) is one of the most significant architects in the history of Denmark; he was the trail-blazing figurehead of Danish functionalism. A number of his buildings – Nørrebro Theatre (1931–32), Dælls Varehus department store (1928–35), Radiohuset (1936–41) and the first airport built in Kastrup (1937–39) – represented the concentrated essence of contemporary life.



Product info

Information

Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina.

Mounting

E27, white textile cable 2x0.75 mm². Canopy: Yes. Cable length: 4 m.

Finish

Polished brass or chrome. Wet painted white inner side.

Materials

Shade, tub and lid in polished untreated brass or chrome plated aluminium.

Sizes and weights

Width x Height x Length (mm) | 177 x 112 x 177 Max 1.6 kg

Class

Ingress protection IP20. Electric shock protection II w/o ground.

Information

Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina.



Product variants

Colour

● High lustre chrome plated

● Polished brass

Design

Vilhelm Lauritzen

Weight

Min: 1.5 kg Max: 1.6 kg

Finish

High lustre chrome plated, Polished brass

Light distribution diagrams

CartesianIsoluxPolar

□ □ □