

## PH ARTICHOKE

Designed by Poul Henningsen



### Description

The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture as well as emitting diffused light with a unique pattern. The fixture provides decorative and comfortable lighting. For the energy saving LED variant, the quality of light and atmosphere surrounding the product is kept at the highest level.

### Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000128780	BR ST STEEL, 955	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000128781	COP LAC, 930	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000128782	WHT, 081	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000128783	BR ST STEEL, 955	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000128784	COP LAC, 930	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000128785	WHT, 081	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000130393	BR ST STEEL, 955	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000130395	COP LAC, 930	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000130396	WHT, 081	23.6 / 22.8 / 23.6 IN / 37.2 LB
10000130397	BR ST STEEL, 955	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000130399	COP LAC, 930	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000130400	WHT, 081	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000141065	BR ST STEEL, 955	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000141076	COP LAC, 930	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000141079	WHT, 081	28.3 / 25.6 / 28.3 IN / 43.2 LB

10000141080	BR ST STEEL, 955	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000141082	COP LAC, 930	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000141084	WHT, 081	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000144752	BRASS BRUS & COAT, 939	18.9 / 18.4 / 18.9 IN / 18.9 LB
10000144753	BRASS BRUS & COAT, 939	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000144754	BRASS BRUS & COAT, 939	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000144755	BRASS BRUS & COAT, 939	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000144756	BRASS BRUS & COAT, 939	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000144757	BRASS BRUS & COAT, 939	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000144758	BRASS BRUS & COAT, 939	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000146919	BLK, 776	18.9 / 18.4 / 18.9 IN / 18.9 LB
10000146921	BLK, 776	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000146922	BLK, 776	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000146923	BLK, 776	28.3 / 25.6 / 28.3 IN / 43.2 LB
10000146924	BLK, 776	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000146925	BLK, 776	33.1 / 28.3 / 33.1 IN / 58.4 LB
10000149875	BR ST STEEL, 955	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149876	BRASS BRUS & COAT, 939	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149877	COP LAC, 930	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149879	WHT, 081	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149885	BR ST STEEL, 955	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149886	BRASS BRUS & COAT, 939	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149887	COP LAC, 930	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149889	WHT, 081	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149890	BR ST STEEL, 955	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149891	BRASS BRUS & COAT, 939	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149892	COP LAC, 930	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000149894	WHT, 081	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000151297	BLACK	23.6 / 22.8 / 23.6 IN / 35.9 LB
10000151298	BLK, 776	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000151300	BLK, 776	18.9 / 18.4 / 18.9 IN / 20.7 LB
10000151301	BLK, 776	18.9 / 18.4 / 18.9 IN / 20.7 LB
5847901263	WHT, 081	18.9 / 18.4 / 18.9 IN / 18.9 LB
5847901266	BR ST STEEL, 955	18.9 / 18.4 / 18.9 IN / 18.9 LB
6149904759	COP LAC, 930	18.9 / 18.4 / 18.9 IN / 18.9 LB

## Materials & Finishes

### MATERIALS

Leaves: Punched brass, punched copper or laser cut stainless steel.

Top shade: White, spun steel.

Frame: High luster chrome plated, laser cut steel.

Suspension: High lustre chrome plated, spun aluminum.

### FINISHES

Brass, copper or stainless steel, brushed and coated.

Black, powder coated with white, wet painted inner side.

White, wet painted.

## Mounting

Mounting: Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'.

Canopy: White. Cord type: 3-conductors (non-LED) / 2-conductors (LED), 18 AWG white PVC power cord. Cord color: white cord. Cord length: 12'. For mounting instructions, see

download section on the product detail page.

## Information

### Electrical:

System Wattage: 96W (LED); 200W (INC)

LED Wattage: 184 W or 88 W

Delivered lumens: 615 - 3,681

Efficacy: 3.1 lm/W - 38.3 lm/W

### Certifications:

cULus, Damp Location

Protection class IP20


Controllability: 0-10V Dimming (LED variants); Phase dimming (incandescent variants)

Color Rendering:  $Ra \geq 90$  for LED variants.


Performance dependent upon screw-base lamp used in socketed variants. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

## Light distribution diagrams


### CARTESIAN

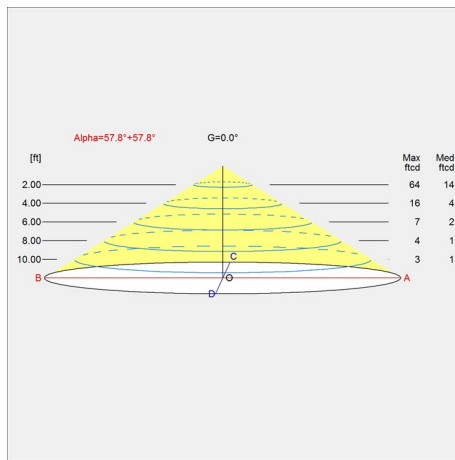

### ISOLUX

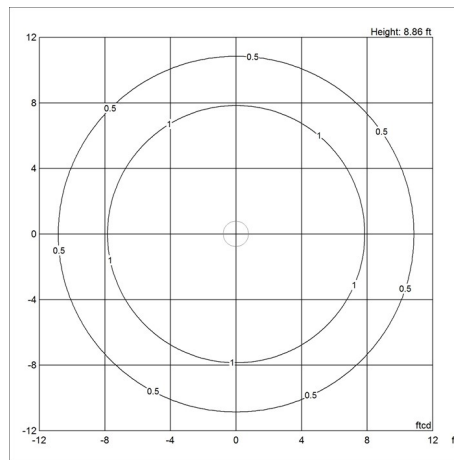

### POLAR

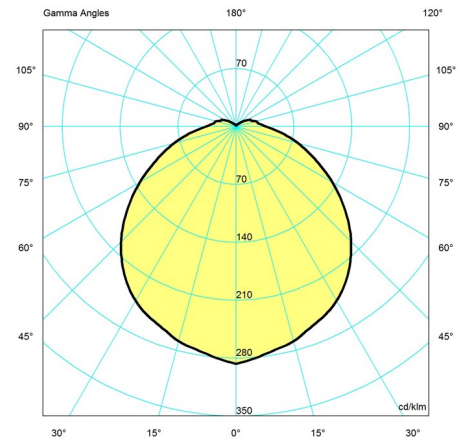

## Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000128780	LED 3000K	120-277V/60HZ	2736	Dim 0-10v	Wht
10000128781	LED 3000K	120-277V/60HZ	3152	Dim 0-10v	Wht
10000128782	LED 3000K	120-277V/60HZ	3681	Dim 0-10v	Wht
10000128783	LED 3000K	120-277V/60HZ	2736	Dim 0-10v	Wht
10000128784	LED 3000K	120-277V/60HZ	3152	Dim 0-10v	Wht
10000128785	LED 3000K	120-277V/60HZ	3681	Dim 0-10v	Wht
10000130393	LED 2700K	120-277V/60HZ	2387	Dim 0-10v	Wht
10000130395	LED 2700K	120-277V/60HZ	2621	Dim 0-10v	Wht

10000130396	LED 2700K	120-277V/60HZ	3631	Dim 0-10v	Wht
10000130397	LED 3000K	120-277V/60HZ	2484	Dim 0-10v	Wht
10000130399	LED 3000K	120-277V/60HZ	2726	Dim 0-10v	Wht
10000130400	LED 3000K	120-277V/60HZ	3777	Dim 0-10v	Wht
10000141065	LED 2700K (ra90)	120-277V/60HZ	2630	Dim 0-10v	Wht
10000141076	LED 2700K (ra90)	120-277V/60HZ	3030	Dim 0-10v	Wht
10000141079	LED 2700K (ra90)	120-277V/60HZ	3538	Dim 0-10v	Wht
10000141080	LED 2700K (ra90)	120-277V/60HZ	2630	Dim 0-10v	Wht
10000141082	LED 2700K (ra90)	120-277V/60HZ	3030	Dim 0-10v	Wht
10000141084	LED 2700K (ra90)	120-277V/60HZ	3538	Dim 0-10v	Wht
10000144752	A-23W/IF medium	120V	754	-	Wht
10000144753	LED 2700K (ra90)	120-277V/60HZ	2621	Dim 0-10v	Wht
10000144754	LED 3000K (ra90)	120-277V/60HZ	2726	Dim 0-10v	Wht
10000144755	LED 2700K (ra90)	120-277V/60HZ	3030	Dim 0-10v	Wht
10000144756	LED 3000K (ra90)	120-277V/60HZ	3152	Dim 0-10v	Wht
10000144757	LED 2700K (ra90)	120-277V/60HZ	3152	Dim 0-10v	Wht
10000144758	LED 3000K (ra90)	120-277V/60HZ	3030	Dim 0-10v	Wht
10000146919	A-23W/IF medium	120V	615	-	Wht
10000146921	LED 3000K	120-277V/60HZ	2119	Dim 0-10v	Wht
10000146922	LED 2700K	120-277V/60HZ	3362	Dim 0-10v	Wht
10000146923	LED 3000K	120-277V/60HZ	3362	Dim 0-10v	Wht
10000146924	LED 2700K	120-277V/60HZ	3362	Dim 0-10v	Wht
10000146925	LED 3000K	120-277V/60HZ	3362	Dim 0-10v	Wht
10000149875	LED 3000K	120-277V/60HZ	971	Dim 0-10v	Wht
10000149876	LED 3000K	120-277V/60HZ	971	Dim 0-10v	Wht
10000149877	LED 3000K	120-277V/60HZ	1085	Dim 0-10v	Wht
10000149879	LED 3000K	120-277V/60HZ	1466	Dim 0-10v	Wht
10000149885	LED 3000-1600K D2W	120-277V/60HZ	800	Dim 0-10v	Wht
10000149886	LED 3000-1600K D2W	120-277V/60HZ	800	Dim 0-10v	Wht
10000149887	LED 3000-1600K D2W	120-277V/60HZ	894	Dim 0-10v	Wht
10000149889	LED 3000-1600K D2W	120-277V/60HZ	1208	Dim 0-10v	Wht
10000149890	LED 3000-1600K D2W	120V	800	Phase dimming (mains dimm)	Wht
10000149891	LED 3000-1600K D2W	120V	800	Phase dimming (mains dimm)	Wht
10000149892	LED 3000-1600K D2W	120V	894	Phase dimming (mains dimm)	Wht
10000149894	LED 3000-1600K D2W	120V	1208	Phase dimming (mains dimm)	Wht
10000151297	LED 2700K	120-277V/60HZ	2037	Dim 0-10v	Wht
10000151298	LED 3000K	120-277V/60HZ	779	Dim 0-10v	Wht
10000151300	LED 3000-1600K D2W	120-277V/60HZ	641	Dim 0-10v	Wht
10000151301	LED 3000-1600K D2W	120V	641	Phase dimming (mains dimm)	Wht
5847901263	A-23/CL medium	120V	979	-	Wht
5847901266	A-23/CL medium	120V	703	-	Wht
6149904759	A-23/CL medium	120V	755	-	Wht

## Specification Notes

- 18.9" available in 200W incandescent or 44W LED.
- 23.6", 28.3" and 33.1" available only in 96W LED.
- Incandescent variants available only in 120V.
- LED variants available only in 120-277V with 0-10V dimming.