


SKOT WALL

Designed by LK as

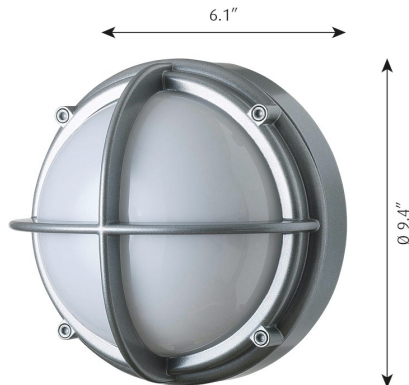

Description

The fixture is available with two types of distribution: symmetric or asymmetric. The asymmetric is only recommended for wall mounting. The opal diffuser creates a soft light distribution.

Variants

| VARIANT NUMBER | COLOR, RAL | W / H / L (IN) / W (LB) |
|----------------|--------------------|-----------------------------|
| 5743911422 | SILV, 168 | 9.4 / 6.1 / 9.4 IN / 5.9 LB |
| 5743911435 | SILV, 168 | 9.4 / 6.1 / 9.4 IN / 6.5 LB |
| 5743911464 | SILV, 168 | 9.4 / 6.1 / 9.4 IN / 5.9 LB |
| 5743911477 | SILV, 168 | 9.4 / 6.1 / 9.4 IN / 6.5 LB |
| 5743911503 | NAT PAINT ALU, 162 | 9.4 / 6.1 / 9.4 IN / 5.9 LB |
| 5743911516 | NAT PAINT ALU, 162 | 9.4 / 6.1 / 9.4 IN / 6.5 LB |
| 5743911545 | NAT PAINT ALU, 162 | 9.4 / 6.1 / 9.4 IN / 5.9 LB |
| 5743911558 | NAT PAINT ALU, 162 | 9.4 / 6.1 / 9.4 IN / 6.5 LB |

Materials & Finishes

MATERIALS

Diffuser: Injection molded white opal polycarbonate. Base/cross guard: Die cast aluminum.


FINISHES

Natural painted aluminum or silver, powder coated.

Mounting Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box. For mounting instructions, see download section on the product detail page.

Information Electrical:
System Wattage: 15 W
LED Wattage: 14 W
Delivered lumens: 308 lm - 476 lm
Efficacy: 20.5 - 31.7 lm/W
Certifications:
cULus, Wet Location
Protection class IP66
IK class 10
BUG Rating: B1-U2-G1
Min.-Max. Ambient Temp: -40°C to +40°C
Color Rendering: Ra≥80
This product is non-dimming. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams

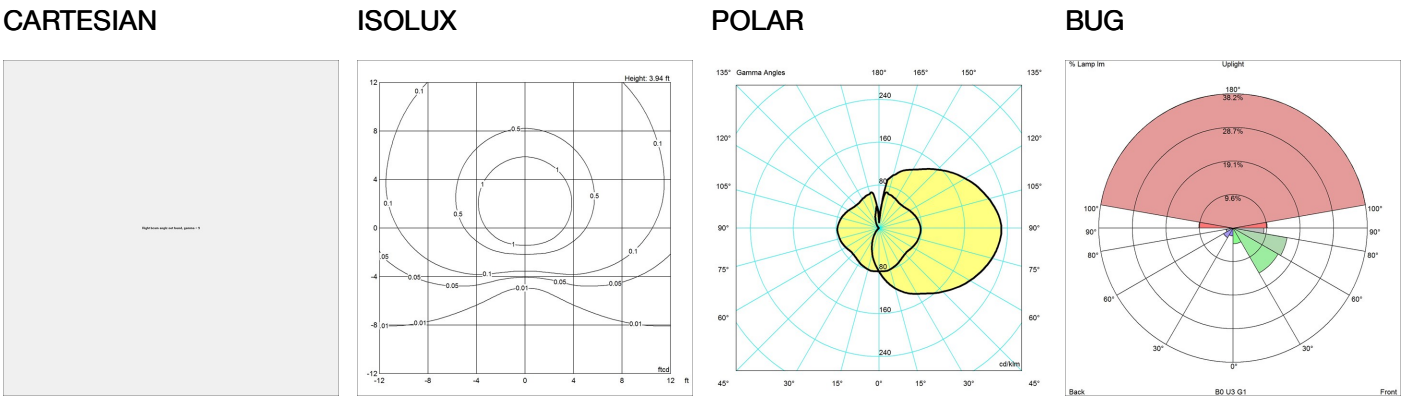

Variant Options For particular variant options, please check our online Product Variants Configurator on the product detail page.

| VARIANT NO. | LIGHT SOURCE | VOLTAGE/FRQ | LUMEN | FEATURES | CABLE |
|-------------|--------------|---------------|-------|----------|-------|
| 5743911422 | LED 3000K | 120-277V/60HZ | 438 | - | - |
| 5743911435 | LED 3000K | 120-277V/60HZ | 308 | - | - |
| 5743911464 | LED 4000K | 120-277V/60HZ | 476 | - | - |
| 5743911477 | LED 4000K | 120-277V/60HZ | 476 | - | - |
| 5743911503 | LED 3000K | 120-277V/60HZ | 438 | - | - |
| 5743911516 | LED 3000K | 120-277V/60HZ | 308 | - | - |

| | | | | | |
|------------|-----------|---------------|-----|---|---|
| 5743911545 | LED 4000K | 120-277V/60HZ | 476 | - | - |
| 5743911558 | LED 4000K | 120-277V/60HZ | 476 | - | - |
