

CEILING FAN COMPANY

ESSWC-6-WH

CEILING FAN Wall CONTROLLER INSTALLATION AND OPERATION INSTRUCTION



SAFETY INFORMATION AND GENERAL GUIDE

READ AND SAVE THESE INSTRUCTIONS

- Please read and understand this entire manual before attempting to assemble, install or operate the product.
- Make sure that all electrical connections comply with local codes, ordinances, the National Electrical Code and ANSI/NFPA 70-1999. Hire a qualified electrician or consult a do-it-yourself wiring handbook if you are unfamiliar with installing electrical wiring.
- **Warning**: Before proceeding, be sure to shut off electricity at main switch or circuit breaker in order to avoid electrical shock.

Make sure the fan is set on HIGH speed and the light is in the ON position by pull chain controls originally supplied with your fan.

Note: Fan installation must be complete including assembly of blades before testing wall control unit.

Note: Refer to your Ceiling fan instruction manual for Safety and installation instruction.

This wall controller is to be used for the control of ceiling fan and fan light only, and in an AC 120V 60HZ power supply only.

Warning: Do not exceed maximum rating of the wall controller. Install the wall controller away from excess heat or humidity

Do not use the wall controller with SOLID-STATE fans.

Customer Service 800-969-3347

Customer Service Center 7400 Linder Ave. Skokie, IL 60077 www.montecarlofans.com





Wall Control Installation and Wiring

Warning: Before proceeding, be sure to shut off electricity at main switch or circuit breaker in order to avoid electrical shock.

Note: Before installing the wall transmitter, place it in OFF position. (Fig.2)

Make series-wound connection for the wall controller with HOT wire from house and lead wires from fan.

Connect the black/white wire marked "AC IN L" from wall controller to the HOT wire from house and then connect the black wire marked "TO MOTOR L" of wall controller to the fan lead wire from fan in outlet box. Connect the blue wire marked "FOR LIGHT" from wall controller to the light lead wire from fan (fan with light)

Connect green/yellow grounded wire to grounded wire from outlet box.

Install the wall controller to outlet box using machine screws provided.


Attach wall plate to wall control unit with screws provided.

Operation

This wall controller provides 4 fan speeds, light on/off and light dimming control.(Fig.2)

1 - High - , 2 - Medium high , 3 - Medium , 4 - Low , - Off.

 $\$ Light on/off and dimming.

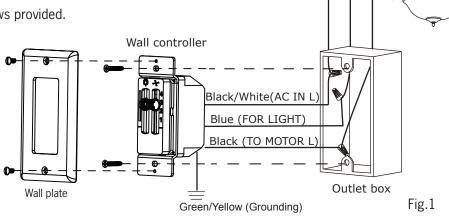

120V/60HZ

Power supply BLACK (Live)

WHITE (Neutral)

BLUE

