

INSTALLATION INSTRUCTIONS

Item# N1959-760

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. To begin assembly, thread stem (L) with fixture loop (J) onto coupler (1) and tighten.

HANGING THE FIXTURE (Fig. 2)

4. Install 1/4" IPS pipe "not provided" with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown. Thread hickey (A) on the 1/4"IPS pipe and tighten with hex nut (C).
5. Secure the hex nut (C) and washer (B) onto all thread (D), then thread all thread (D) into the hickey (A); and secure with hex nut (C) and washer (B) on the other end of all thread (D).
6. Thread ceiling loop (E) onto all thread (D) tightly. The all thread length maybe adjusted if necessary.
7. Determine the desired hanging height and discard the excess chain.
Note: 2x quick links (H) are provided and they must be attached to both end of chain (I).
8. Open one quick link (H) and connect to fixture loop (J), then close the quick link (H). Slip collar ring (G) and canopy (F) over the chain (I), then allow canopy (F) to rest on the top of fixture loop (J). Open another quick link (H) and connect to ceiling loop (E), then close the quick link (H).
9. Feed the fixtures wires and safety cable through the chain (I), ceiling loop (E) and all thread (D) then allow them to exit through the side open holes of hickey (A).
10. Run safety cable through hickey (A) open hole and secure safety cable with set screw assembly and set screw.

CONNECTING THE WIRE (Fig. 3)

11. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise, consult with the electrician.
12. Tuck wire connections neatly into junction box (JB).
13. Raise canopy (F) over ceiling loop (E) and secure with collar ring (G). (Fig. 2)

FINISHING THE FIXTURE (Fig. 1)

14. To begin installing the accessories, unwrap the sea glass strands (M) from the packing.
15. Thread all the sea glass strand (M) onto frame (2)
16. Install (40) forty candelabra base bulbs (K) up to 40 watts each of CFL or LED equivalent (not included) in accordance to fixture specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

WARNING: This luminaire must be mounted or supported independently of an outlet box.

FIG. 1

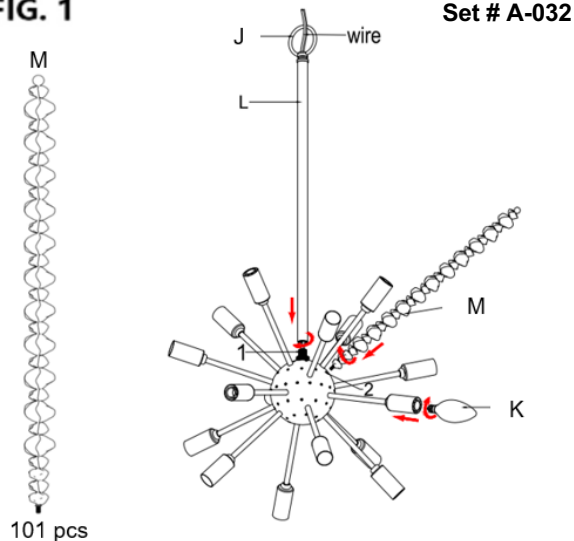


FIG. 2


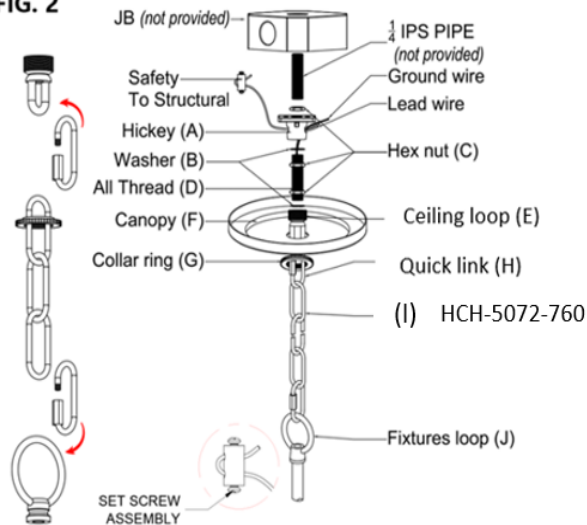


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

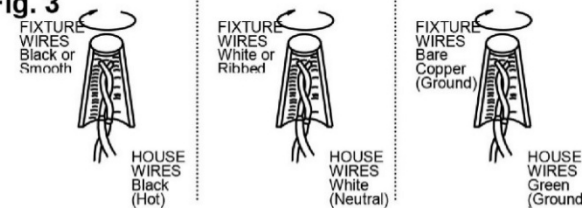

american
lighting
association