

INSTALLATION INSTRUCTIONS

Item# N3406-870

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1 & Fig.2)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Remove the mounting plate (A) from the canopy (F) by removing the decorative ball nuts (G) located on the front of canopy (F).
4. Attached mounting plate (A) to junction box (JB) (*not provided*) with # 8-32 mounting screws (B). The side of mounting plate (A) marked with "GND" must be face out.

HANGING THE FIXTURE (Fig.1)

5. Thread the center rod (I) onto coupler of the frame and insert the canopy (F) to the center rod coupler and secure with support cable (SC), lock washer (E) and hex nut (D) until tight.
6. The support cable (SC) is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (HK) on the end of support cable (SC) into a slot located on mounting plate (A). Carefully allow the support cable (SC) to support the weight of the fixture while wiring.

CONNECTING THE WIRE (Fig. 3)

7. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
8. Tuck wire connections neatly into junction box (JB). Fig.2.
9. Raise the canopy (F) over the screw (C) and secure with decorative ball nuts (G).

ACCESSORIES INSTALLATION (Fig. 1)

10. To begin installing the accessories unwrap the oval swirl glass (J) from the packing.
11. To begin installing the oval swirl glass (J), place the rubber washer (I) and oval swirl glass (J) into the headless screw and secure with rubber washer (I) provided and ball nut (G). Do not over tighten.
12. Repeat the process until completed.

FINISHING THE FIXTURE (FIG. 1)

13. Install (6) **six candelabra** base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance to fixture specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

FIG. 1

Set # A-020B
-Mounting Plate
-Mounting Screw x 2
-Ground Screw

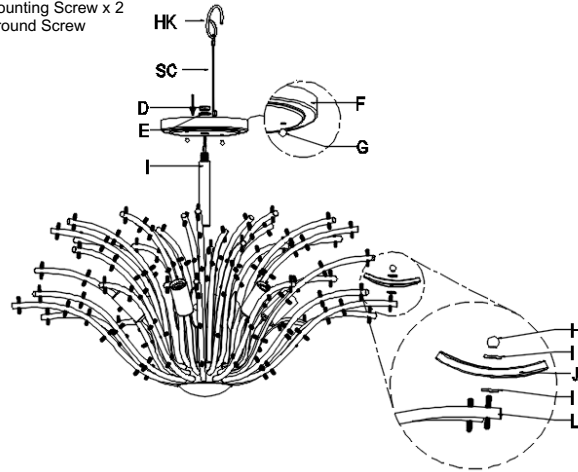


FIG. 2


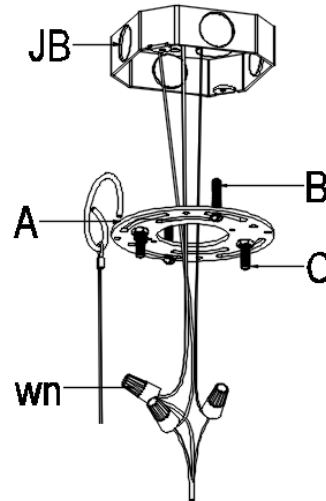


Fig. 3

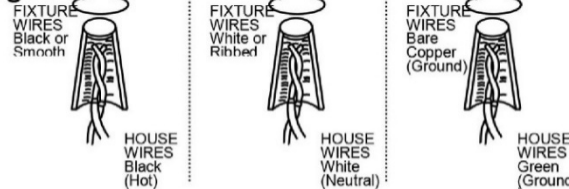

american
lighting
association