


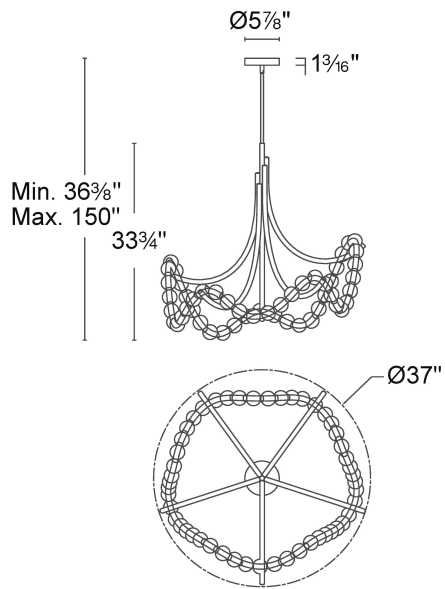

PD-50437

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Parel

PD-50437

PRODUCT DESCRIPTION

Spanish Alabaster beads are strung on an LED loop and draped over gleaming arms. Dress up your ceiling with this delightful luminaire.

FEATURES

- Driver concealed within the canopy
- Sculptural frame illuminated by a fixed silica strand of First class quality Spanish alabaster orbs
- Natural alabaster with unique veining in each crafted piece
- Three 12" and one 6" down rods included (additional sold separately)
- Slope ceiling adaptable. Hang straight swivel.
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel frame with silica diffuser and natural alabaster shade

REPLACEMENT PARTS

- RPL-ROD-IN06-AB - 6" rod (AB finish)
- RPL-ROD-IN06-AN - 6" rod (AN finish)
- RPL-ROD-IN12-AB - 12" rod (AB finish)
- RPL-ROD-IN12-AN - 12" rod (AN finish)

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-50437 37"	3000K	AB Aged Brass	34.2W	3200	1346
	3000K	AN Antique Nickel	34.2W	3200	1346

Example: **PD-50437-AN**

For custom requests please contact customs@modernforms.com




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Parel

PD-50446

PRODUCT DESCRIPTION

Spanish Alabaster beads are strung on an LED loop and draped over gleaming arms. Dress up your ceiling with this delightful luminaire.

FEATURES


- Driver concealed within the canopy
- Sculptural frame illuminated by a fixed silica strand of First class quality Spanish alabaster orbs
- Natural alabaster with unique veining in each crafted piece
- Three 12" and one 6" down rods included (additional sold separately)
- Slope ceiling adaptable. Hang straight swivel.
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel frame with silica diffuser and alabaster shades

REPLACEMENT PARTS

RPL-ROD-IN06-AB - 6" Rod (AB finish)
 RPL-ROD-IN06-AN - 6" Rod (AN finish)
 RPL-ROD-IN12-AB - 12" Rod (AB finish)
 RPL-ROD-IN12-AN - 12" Rod (AN finish)

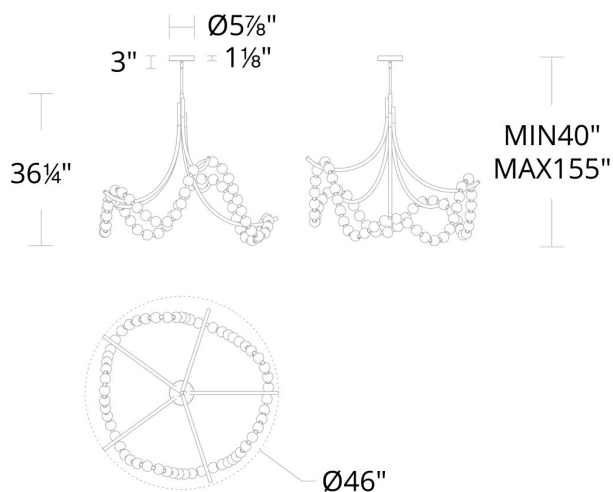

FM-50446

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-50446 46"	3000K 3000K	AB Aged Brass AN Antique Nickel	40.9W 40.9W	4000 4000	2088 2088

Example: **PD-50446-AN**

For custom requests please contact customs@modernforms.com