


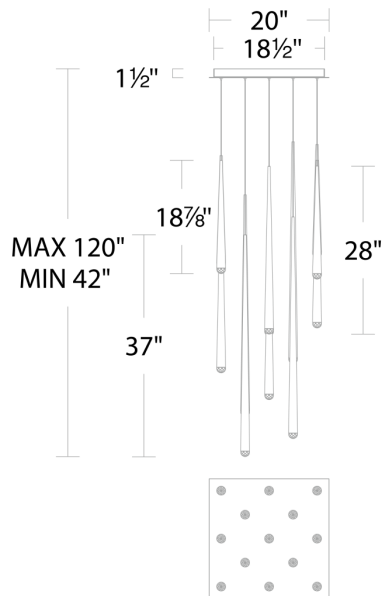

PD-41713S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cascade

PD-41713S

PRODUCT DESCRIPTION

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to space throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Hand-cut faceted K9 crystal
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277V, 50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with crystal diffuser


REPLACEMENT PARTS

RPL-GLA-41719 - Glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41713S 20" - 13 Lights	3500K 90	98W	4878	AB Aged Brass
	3500K 90	98W	4878	BK Black
	3500K 90	98W	4878	PN Polished Nickel

Example: **PD-41713S-PN**

For custom requests please contact customs@modernforms.com

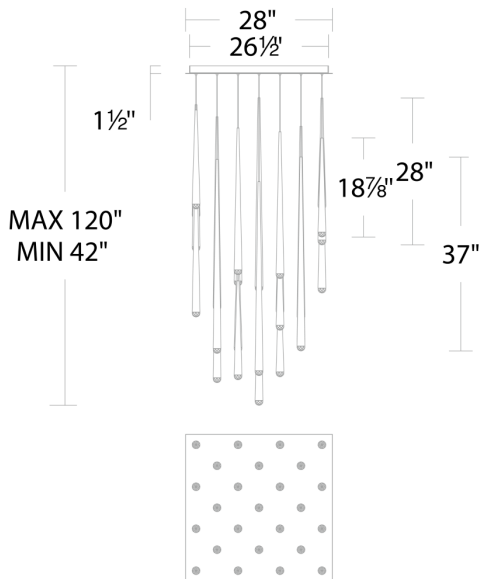

PD-41725S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cascade

PD-41725S

PRODUCT DESCRIPTION

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to space throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Hand-cut faceted K9 crystal
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. and 175 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277V, 50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with crystal diffuser


REPLACEMENT PARTS

RPL-GLA-41719 - Glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41725S 28" - 25 Lights	3500K 90	182W	9381	AB Aged Brass
	3500K 90	182W	9381	BK Black
	3500K 90	182W	9381	PN Polished Nickel

Example: **PD-41725S-PN**

For custom requests please contact customs@modernforms.com

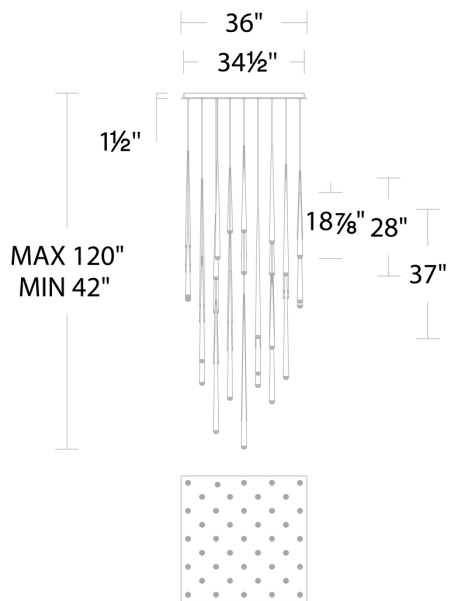

PD-41741S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cascade

PD-41741S

PRODUCT DESCRIPTION

Like a chic yet understated exclamation of luxury, these pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to space throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Hand-cut faceted K9 crystal
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. and 175 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277V, 50/60Hz
Dimming	ELV
Color Temp	3500K
CRI	90
Construction	Steel body with crystal diffuser

REPLACEMENT PARTS

RPL-GLA-41719 - Glass

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-41741S 36" - 41 Lights	3500K 90	294W	15385	AB Aged Brass
	3500K 90	294W	15385	BK Black
	3500K 90	294W	15385	PN Polished Nickel

Example: **PD-41741S-PN**

For custom requests please contact customs@modernforms.com