


PISCES

FR-W2503-54L

54" Ceiling Fan

MODERN FORMS

SMART FANS

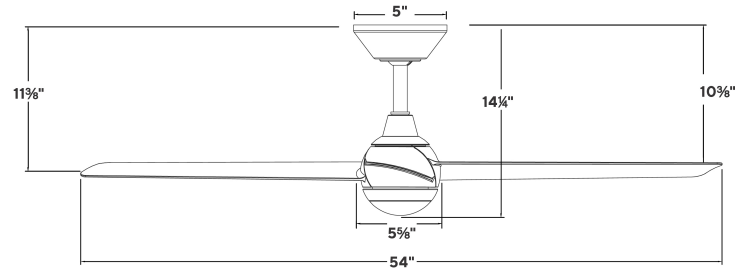

PRODUCT DESCRIPTION

Embracing the art of light, the natural Spanish Alabaster diffuser at the center of Pisces shimmers and casts an entrancing celestial glow from the stone's unique, natural variegations. Its three-blade configuration has a 54-inch sweep and quiet DC motor to effectively cool your space. An integrated, dimmable LED module offers a range of illumination options. Select from two sophisticated finishes of Matte Black or Matte White, or choose Matte Black or Matte White accented by a Soft Brass trim. Pair Pisces with your smart home ecosystem via the Modern Forms app.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC Motor
- Includes BT remote control
- Optional wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	3606/5700
Weighted-Average/High Energy Use (W):	18/25
Estimated Yearly Energy Cost (\$):	5
Weighted-Average/High Efficiency (CFM/W):	209
Max RPM:	169

ORDER NUMBER

Model	Trim	Blade
FR-W2503-54L	MB Matte Black	MB Matte Black
	MW Matte White	MW Matte White
	SB Satin Brass	MB Matte Black
	SB Satin Brass	MW Matte White

Example: **FR-W2503-54L-SB/MB**

- *Results may vary based on application and surroundings.
 *This fan comes uni-pack - blade select options are not available

SPECIFICATIONS

Construction:	Aluminum, ABS
Blade:	16° Pitch, 54" sweep
Downrod:	.75"W x 6"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	9.1 lbs
Total Power:	41W
Standards:	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
Motor Type:	108 x 20 sensorless DC motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	16W
Lumens/Delivered Lumens:	1497 - 1606 (Based on CCT) / 630
Dimming:	Integrated
CRI:	90
CCT Color Temperature:	3000K (2700K/4000K/5000K) selectable
Rated Life:	50,000 hours

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

PISCES






FR-W2503-54L

54" Ceiling Fan

MODERN FORMS

SMART FANS

OPTIONAL ACCESSORIES

Bluetooth Wall Control		F-WCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		F-RCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN		All our downrods are .75 (in) I.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		XF-I		Connects two downrods together.
Sloped Ceiling Kit		XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BZ**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire