



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Strait

WS-W82516

PRODUCT DESCRIPTION


The striking Strait wall sconce showcases two angled plates, elegantly divided by a white etched diffuser. Color temperature selectable LED light emanates outward in a clean, geometric glow, highlighting the fixture's modern design.

FEATURES

- Driver concealed within the canopy
- Front and ambient illumination
- AB (Aged Brass) finish indoor only option is available
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Aluminum frame with acrylic diffuser
Mounting	Can be mounted on wall in all orientations

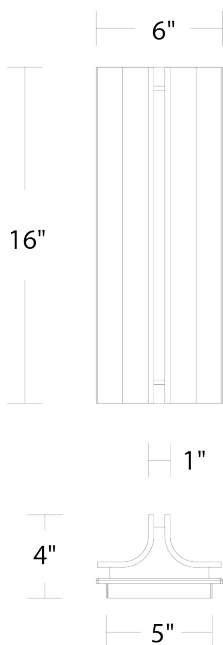


WS-W82516
WS-W82516

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W82516 16"	2700K	BK Black	14.8W	800	231
	3000K	BK Black	14.8W	800	239
	3500K	BK Black	14.8W	800	248
	4000K	BK Black	14.8W	800	248

Example: **WS-W82516-40-BK**

For custom requests please contact customs@modernforms.com

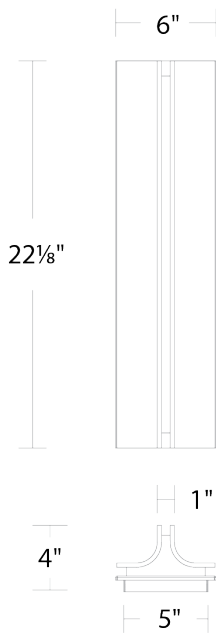

WS-82522
WS-W82522

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Strait

WS-W82522

PRODUCT DESCRIPTION

The striking Strait wall sconce showcases two angled plates, elegantly divided by a white etched diffuser. Color temperature selectable LED light emanates outward in a clean, geometric glow, highlighting the fixture's modern design.

FEATURES

- Driver concealed within the canopy
- Front and ambient illumination
- AB (Aged Brass) finish indoor only option is available
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	4000K, 3500K, 3000K, 2700K
CRI	90
Construction	Aluminum frame with acrylic diffuser
Mounting	Can be mounted on wall in all orientations

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W82522 22"	2700K	BK Black	20.4W	1000	381
	3000K	BK Black	20.4W	1000	394
	3500K	BK Black	20.4W	1000	408
	4000K	BK Black	20.4W	1000	407

Example: **WS-W82522-40-BK**

For custom requests please contact customs@modernforms.com