


Crown

FR-D2602-62L

62" Ceiling Fan

MODERN FORMS

SMART FANS

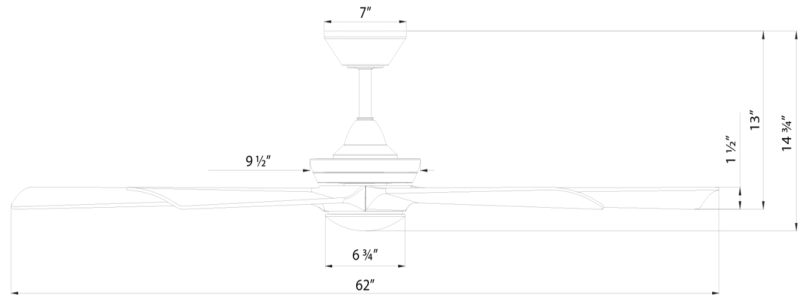

PRODUCT DESCRIPTION

Crown elevates luxury fan design with a sculptural alabaster diffuser and integrated, tunable LEDs that delivers both uplight and downlight in perfect symmetry. Light glows through hand-carved alabaster stone, casting a radiant halo above and a soothing glow below. The 62-inch fan delivers up to 7600 CFM with whisper-quiet DC efficiency. Smart-enabled and damp rated, Crown blends comfort, illumination, and art: making it ideal for grand interiors and outdoor lounges seeking elevated ambiance.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes BT remote control (F4-RCUBT-WT)
- Optional wall control sold separately (F4-WCUBT-WT)
- Compatible with MyWAC app

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	5063/7618
Weighted-Average/High Energy Use (W):	24/36
Estimated Yearly Energy Cost (\$):	7
Weighted-Average/High Efficiency (CFM/W):	211
Max RPM:	139

ORDER NUMBER

Model	Housing	Blade
FR-D2602-62L	SB Soft Brass	MB Matte Black
	SB Soft Brass	MW Matte White

Example: FR-D2602-62L-SB/MW

- *Results may vary based on application and surroundings.
 *This fan comes uni-pack - blade select options are not available

SPECIFICATIONS

Construction:	Aluminum, ABS
Blade:	13° Pitch, 62" sweep
Downrod:	3/4"W + 6"H included
Mounting Slope:	Up to 30°
Wire:	66" (with connectors)
Hanging Weight:	17 lbs
Total Power:	90W
Standards:	UL/cUL Damp Location listed, Title 24 JA8-20 16 Compliant, Title 20, Energy Star rated
Motor Type:	108 x 20 sensorless DC motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	30W
Lumens:	3687 - 3846 (Based on CCT)/2195
Dimming:	Integrated
CRI:	90
Color Temperature:	2700K, 3000K, 3500K 4000K, 5000K selectable/tunable
Rated Life:	50,000 hours
Uplight Wattage:	16W
Uplight Lumens:	1495-1678 (Based on CCT)/850
Total Delivered Lumens:	3052 (up and down-light)

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com
 Phone (800) 526.2588
 Fax (800) 526.2585




Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

Modern Forms retains the right to modify the design of our products at any time as part of the company's continuous improvement program. JUL 2020

OPTIONAL ACCESSORIES

Bluetooth Wall Control	F4-WCUBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control	R4-RCUBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod	 XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN		All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers	 XF-I		Connects two downrods together.
Sloped Ceiling Kit	 XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F4-WCUBT-WT**, Remote Control: **F4-RCUBT-WT**, Downrod: **XF-12-MB**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire