




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Iconix

WS266620

PRODUCT DESCRIPTION

Geometric Purity. The Iconix Wall Sconce asserts a commanding presence, embodying geometric purity and cultured illumination for the modern bath. Each sconce is an uncompromising marvel of modern transitional design, featuring a distinct combination of clear fluted glass and PC diffuser, meticulously arranged to create an enchanting interplay of texture and light. 4CCT LED light is diffused through these elements, casting a multi-dimensional glow that defines and elevates the space. ICONIX luminaires are charismatic statements of architectural elegance, transforming functional lighting into captivating works of art that resonate with modern sophistication.

FEATURES


- Driver concealed within the canopy
- Clear fluted glass encases an inner PC diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2025 Compliant
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame, clear blown ribbed glass shade, and PC diffuser

REPLACEMENT PARTS

RPL-GLA-266620 - Replacement Glass

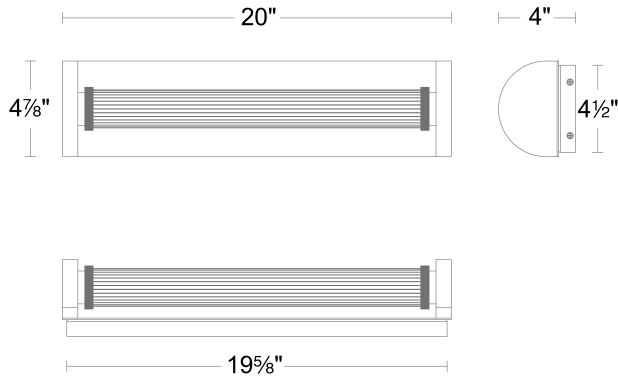


WS266620

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS266620 20"	2700K/3000K/3500K/4000K	AB Aged Brass PN Polished Nickel	14.9W 14.9W	1138 1138	1115 1115

Example: **WS266620-PN**

For custom requests please contact customs@modernforms.com




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Iconix

WS266628

PRODUCT DESCRIPTION

Geometric Purity. The Iconix Wall Sconce asserts a commanding presence, embodying geometric purity and cultured illumination for the modern bath. Each sconce is an uncompromising marvel of modern transitional design, featuring a distinct combination of clear fluted glass and PC diffuser, meticulously arranged to create an enchanting interplay of texture and light. 4CCT LED light is diffused through these elements, casting a multi-dimensional glow that defines and elevates the space. ICONIX luminaires are charismatic statements of architectural elegance, transforming functional lighting into captivating works of art that resonate with modern sophistication.

FEATURES


- Driver concealed within the canopy
- Clear fluted glass encases an inner PC diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2025 Compliant
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame, clear blown ribbed glass shade, and PC diffuser

REPLACEMENT PARTS

RPL-GLA-266628 - Replacement Glass

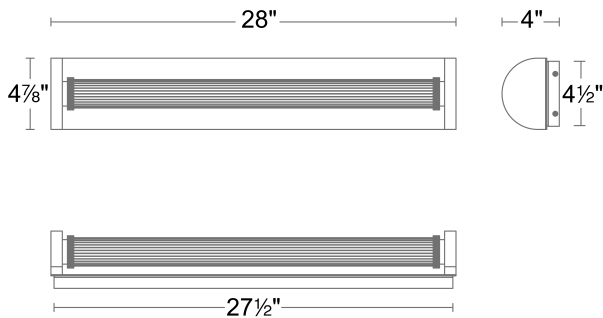

WS266628

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS266628 28"	2700K/3000K/3500K/4000K	AB Aged Brass	20.3W	1703	1635
	2700K/3000K/3500K/4000K	PN Polished Nickel	20.3W	1703	1635
	2700K/3000K/3500K/4000K				

Example: **WS266628-PN**

For custom requests please contact customs@modernforms.com