

INSTALLATION INSTRUCTIONS FOR 3954-732

For PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.
4. Secure rod (P) to housing (M), then to rod (L). Secure rod (L) to swivel (J).
5. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (G1/G2) to the all thread (H). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
6. Secure rods to the swivel (F) of canopy (E).
7. The support cable is provided to support weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook (Z) on end of support cable into a slot located on mounting plate (A). Carefully allow support cable to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig.2)

8. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw (B) provided.

COMPLETING THE INSTALLATION (Fig. 1)

9. Align the canopy (E) onto mounting plate (A) and secure with screws (D).
10. Hang one end of the four rods (K) over loop (I) first, then the other end over loop (N) on frame (O).
11. Install (4) four candelabra base bulbs up to 60 watts or CFL or LED equivalent (Not included), in accordance with the fixture specification **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Secure glass (R) to rod (P) through plastic washer (Q1/Q2) with finial (S).

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

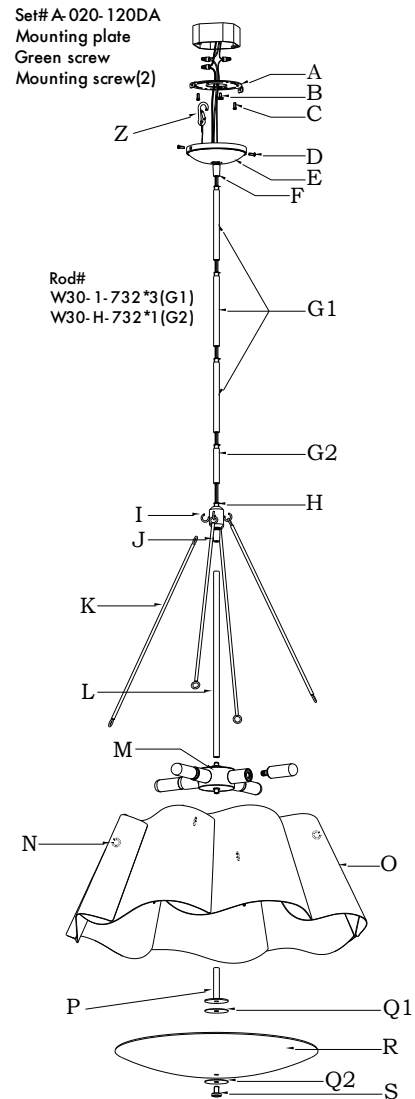


Fig.2

<p>FIXTURE WIRES Black or Smooth</p>	<p>FIXTURE WIRES WHITE OR RIBBED</p>	<p>FIXTURE WIRES Green or Bare Copper (Ground)</p>
<p>HOUSE WIRES Black (Hot)</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>HOUSE WIRES Green or Bare Copper (Ground)</p>

