

INSTALLATION INSTRUCTIONS FOR 3951-732 3951-855

For PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.
4. Install (1) one medium base bulb up to 100 watts or CFL or LED equivalent (Not included), in accordance with the fixture specification **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
5. Rotate glass (Q) to cap (P). Do not over tighten.
6. Secure blade (N) to rod (L/R) with two screws (O1/O2) diagonally. (Shown in Fig.1 detail).
7. Hang iron sheet (M) onto rod (L/R). Then Install finial (S) to rod (R).
8. Secure cap (H) to all thread (J).
9. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (G1/G2) to the all thread (J). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
10. Secure rods to the swivel (F) of canopy (D).
11. The support cable is provided to support weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook (Z) on end of support cable into a slot located on mounting plate (A). Carefully allow support cable to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig.2)

12. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw (B) provided.

COMPLETING THE INSTALLATION (Fig.1)

13. Align the canopy (E) onto mounting plate (A) and secure with screws (D).

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

REPLACING GLASS (Fig.3)

The glass can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details

Warning: Turn off power at the circuit breaker before replacing glass.

- a. Loosen cap (H). Then remove finial (S) and iron sheet (M) on the left and right sides of blade (N).
- b. Loosen screws (O) and remove a piece of blade (N).
- c. Tilt the cap (P) in the direction of the removed blade (N) and remove glass (Q).
- d. Reverse steps a-c for installing the new glass.

Note: The glass should be provided by a specified supplier.



Fig.1

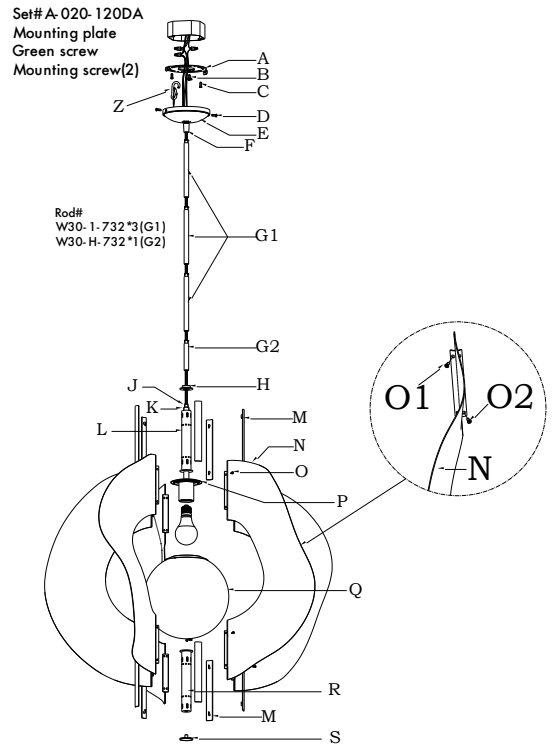


Fig.2


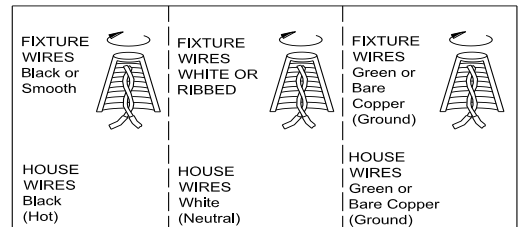


Fig.3

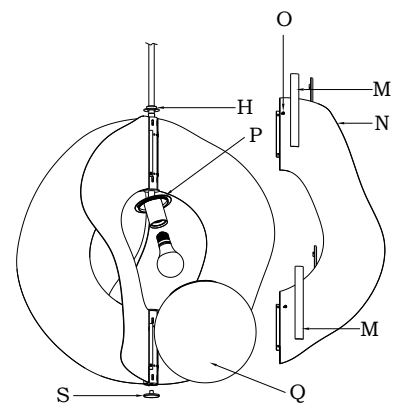

3951-732
3951-855