

INSTALLATION INSTRUCTIONS FOR 3757-732

For ISLAND

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position the mounting plate (A) onto the ceiling and mark the location of the four drywall anchors (D). Pre-drill the holes for the drywall anchors (D) and insert the drywall anchors (D) into the ceiling.
4. Attach the mounting plate (A) to the junction box (not included) with mounting screws (C) (size: 8-32*1 1/2"L). The side of the mounting plate marked "GND" must face out.
5. Place the wood screws (E) through the mounting plate (A) and lock them into the drywall anchors (D) to secure the mounting plate (A) to the ceiling.
6. Fixture includes six 12" and two 6" rods. Determine desired hanging height. Thread rods (J1/J2) to one loop (G) and quick link (H) then to loop (G). Feed fixture wire carefully through each rod.
7. Attach rods to another loop (G) and quick link (H) then to loop (G).
8. The support cable is provided to support weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook (Z) on end of support cable into a slot located on mounting plate (A). Carefully allow support cable to support weight of fixture while wiring.

CONNECTING THE WIRES (Fig.2)

9. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw (B) provided.

COMPLETING THE INSTALLATION (Fig. 1)

10. Align the canopy (I) onto mounting plate (A) and secure with screws (F).
11. Install (6) six medium base bulbs up to 60 watts or CFL or LED equivalent (Not included), in accordance with the fixture specification (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**)

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

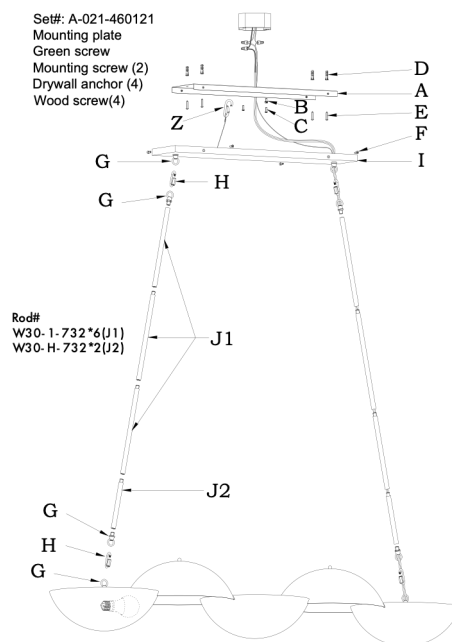


Fig.2

