

# INSTALLATION INSTRUCTIONS

Item# 10385-732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1)

3. Unscrew the mounting screw (E) from the canopy (D) and detach the mounting plate (B).

4. Attach mounting plate (B) to junction box (not included) using junction box screw (A). The side of mounting plate (B) marked "GND" must face out.

5. Loosen screw (F) and secure coupling rod (H) onto all thread at the top of fixture body (I). Determine desired hanging height by loosening screw (F) on canopy (C) and pass wires carefully through canopy (D), then secure wire by tightening screw (F) on canopy (D) and coupling rod (H).

### CONNECTING THE WIRES (Fig. 2)

6. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (B) using the green screw (C) provided.

7. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

8. Position canopy (C) up against ceiling and thread mounting screw (E) to secure fixture to ceiling.

9. Install (1) one medium bulb (K) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

10. Screw glass shade (L) over the socket (J) in the fixture body (I). Do not over tighten.

**To straighten the cord, please use a blow dryer (not included) if necessary.**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig.1

Set#A-020-118A

-Mounting plate

-Ground Screw

-Junction Box Screw\*2

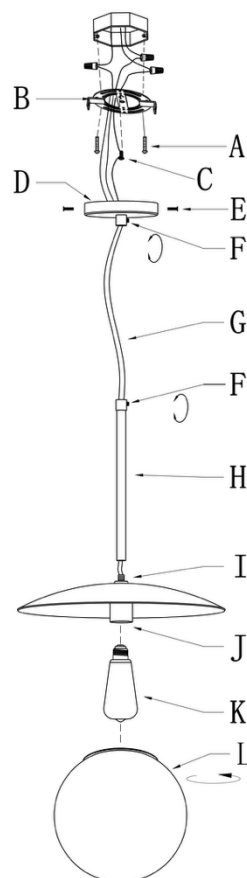


Fig. 2

FIXTURE WIRES  
Black or  
Smooth



HOUSE WIRES  
Black  
(Hot)

FIXTURE WIRES  
White or  
Ribbed




HOUSE WIRES  
White  
(Neutral)

FIXTURE WIRES  
Bare  
Copper  
(Ground)



HOUSE WIRES  
Green  
(Ground)

**Fig.3**

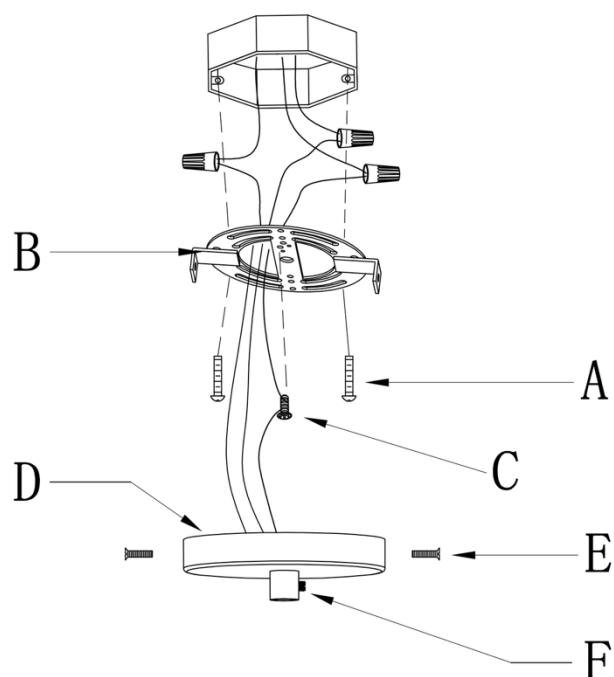

**a. Hardware Bag:**

- A. Junction Box Screw\*2
- B. Mounting plate\*1
- C. Ground screw\*1
- D. Canopy\*1
- E. Mounting screw\*2



**b. Hardware Bag:**

- H. Coupling rod\*1

