

# INSTALLATION INSTRUCTIONS

Item#16027-877

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen mounting screw (G) to remove mounting plate (A) from canopy (F). Temporarily raise mounting plate (A) to ceiling. Mark location for anchors (D), use power drill to drill holes for anchors (D). Insert anchors (D) into hole and press flush with ceiling. Repeat on opposite side.

4. Attach mounting plate (A) to junction box (Not included) using junction box screws (C) (Size: #8-32N\*L1"). The side of the mounting plate (A) marked "GND" must face out.

5. Screw anchor screws (E) through mounting plate (A) and into anchors (D) (installed in step 3).

6. Secure column rods (J) onto the all thread of the fixture body (K).

7. Determine the desired hanging height to remove the excess chain link from chain (I). Attach the quick link (H) to one end link of chain (I) and attach the quick link (H) to the fixture loop of rod (J). Fasten the end link of quick link (H) to the loop on canopy (F). Note: The quick link (H) must be fully closed.

8. Thread the fixture wire and bare copper ground wire up through every other link in the chain (I). Insert the fixture wire carefully up through the canopy.

9. The support cable (O) is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (P) on end of support cable (O) into a slot located on mounting plate (A). Carefully allow the support cable (O) to support the weight of the fixture while wiring.

### CONNECTING THE WIRES (Fig. 2)

10. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw (B) provided.

11. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

12. Raise the canopy (F) to the ceiling. Line up the holes in canopy with holes in mounting plate (A) and secure with four mounting screws (G).

13. Put decorative ring (M) to the top of the socket (L) of the fixture body (K).

Install (8) eight candelabra base bulbs (N) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

**—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig.1

Set#A-021-500106

-Mounting plate

-Ground Screw

-Junction Box Screw\*2

Chain#HCH2072--732


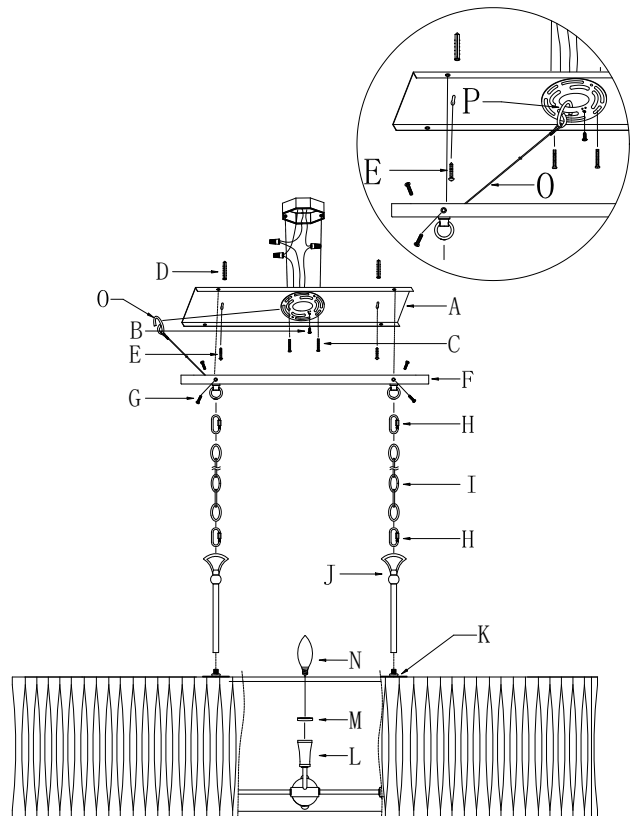


Fig. 2

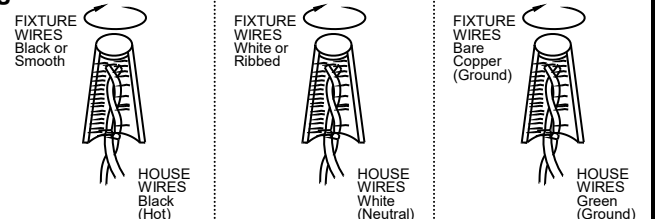


Notice: It is important to use proper chain pliers (not included)

To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.




**Fig.3**

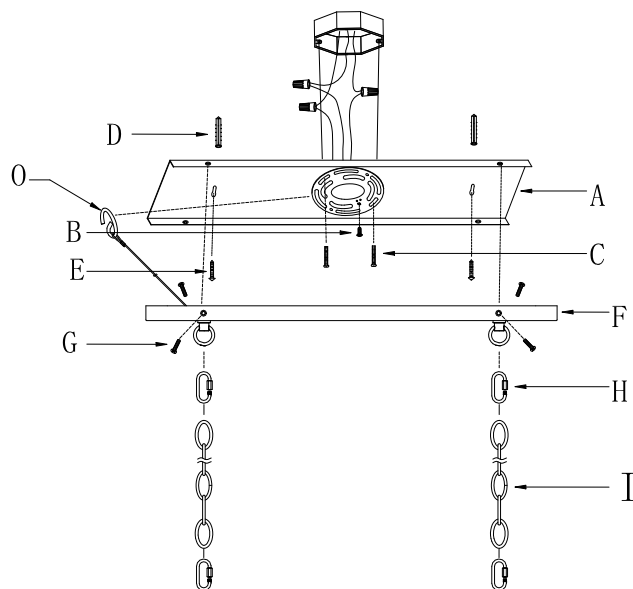

**a. Hardware Bag:**

- A. Mounting plate\*1
- B. Ground Screw\*1
- C. Junction box Screw\*2
- D. Anchor\*2
- E. Anchor Screw\*2
- F. Canopy\*1
- G. Mounting screw\*4
- H. Quick link\*2
- I. Chain\*1
- M. Decorative ring\*8

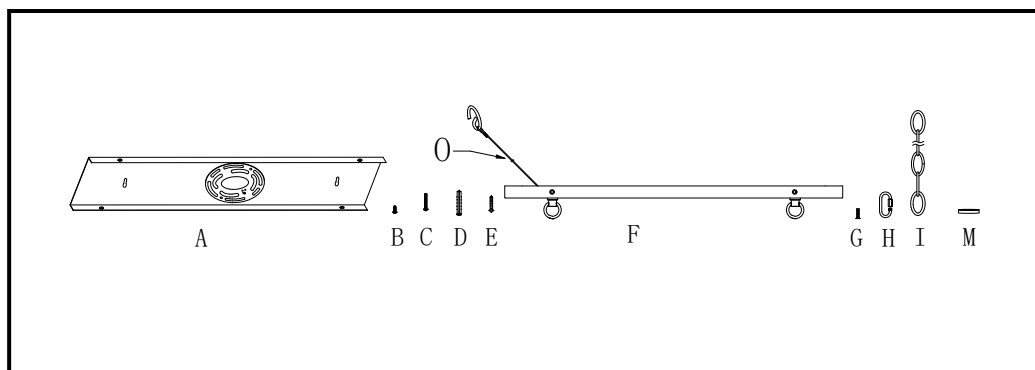

**b. Hardware Bag:**

- J. Column rod\*2

