

# INSTALLATION INSTRUCTIONS

Item# 12952-860 (New. 2025/09/07)

**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker box and, if necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.

## MOUNTING THE FIXTURE (Fig.1)

3. Position the mounting plate (A) through fixing holes onto wall and make marks, drill pilot holes for wood screws (C) into wall, then insert plastic anchors (D) into holes.
4. Secure mounting plate (A) to junction box (Not provided) with junction box screws (E) then secure to Mounting Plate (A) with wood screws (C) into plastic anchors (D) in wall. The side of Mounting Plate (A) Marked with GND must face out.

## CONNECTING THE WIRES (Fig. 2)

5. Connect the fixture wires to the junction box wires as shown in Fig. 2, making sure all wire connectors are secured. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using green screw (H) provided
6. Tucking the wire in the junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

7. Mount fixture body (I) to mounting plate (A), and secure with Back Plate Screws (F).
8. Install (2) two candelabra base bulbs (G) upto 40 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification.

**(DO NOT EXCEED THE SPECIFIED WATTAGE!)**  
**(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return the power to the junction box and test the fixture.

Fig. 1


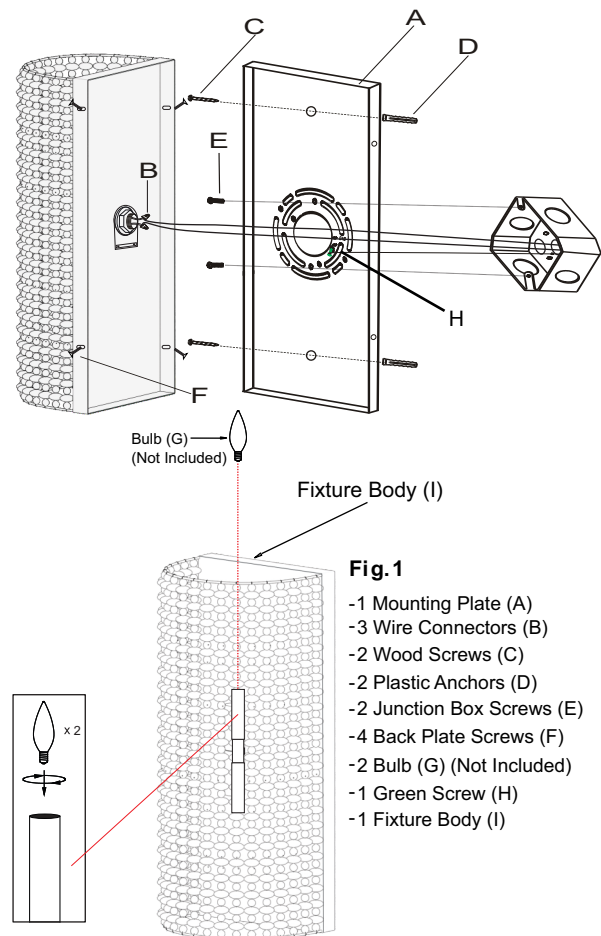


Fig. 2

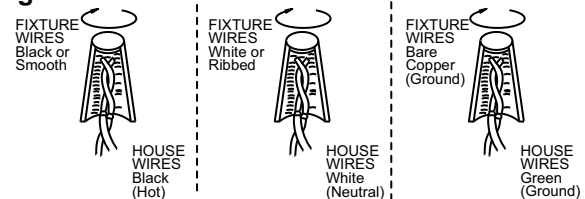

american  
lighting  
association

UL  
LISTED