

# INSTALLATION INSTRUCTIONS

Item# 12419-860 (New. 2025/09/30)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Attached mounting plate (A) to outlet box (Not included) using mounting screws (B) (Size: #8-32N\*L1"). The side of mounting plate (A) marked with "GND" must face out.
4. Line up the holes on connecting rod (I) to the bracket of fixture (J) and bracket of top assembly (H), Secure in place with screws (K) and finials (L). Repeat processes for other connecting rods (I).
5. Line up the holes on short rod (M) to the bracket of fixture (J) and bracket of socket assembly (N), Secure in place with screws (K) and finials (L). Repeat processes for other short rods (M).
6. Determine the desired hanging height and thread rods (F& E) to nipple on top assembly (H). Carefully feed wires through each rod as you assemble. Note: Remove the all thread, if installing with one 6" rod only.
7. Attach fixture canopy (D) by threading onto rod (E).
8. The support cable (G) is provided to support the weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook on end of support cable (G) into a slot located on mounting plate (A). Carefully allow support cable (G) to support weight of fixture while wiring (Fig.1).

### CONNECTING THE WIRES (Fig. 2)

9. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
10. Tuck the wire connectors neatly into outlet box.

### FINISHING THE INSTALLATION (Fig.1)

11. Raise canopy (D) over mounting plate (A) and secure with screws (C).
12. Install (12) twelve candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**

Your installation is now complete. Return power to outlet box and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1



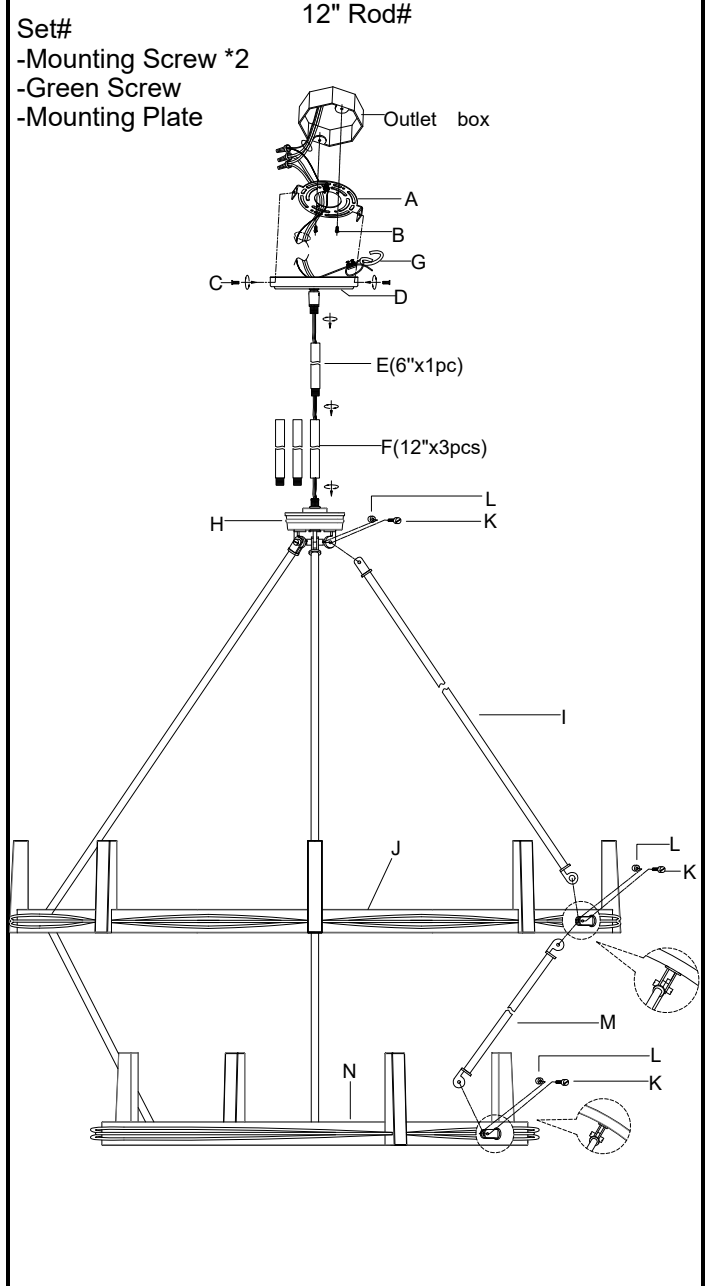


Fig. 2

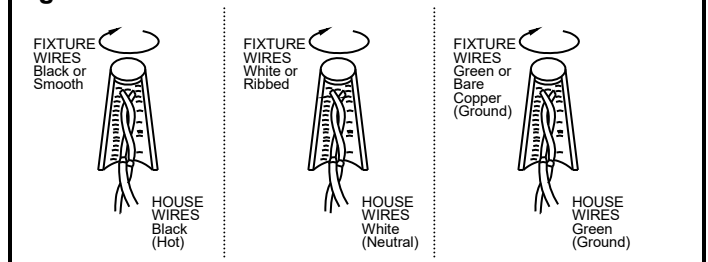

### Replace swivel to be loop system (Fig.3)

1. Unscrew the nut (D4), then remove lock washer (D3), support cable (G), flat plate (D2) and swivel (D1) from the canopy (D).
2. Attach one loop (S) to another loop (S) by using quick link (T). Secure one loop (S) to rod (E).
3. Place another loop (S) over the canopy (D), then place flat plate (D2), support cable (G) and lock washer (D3) onto the protruding nipple at the top of loop (S), securing with hex nut (D4).

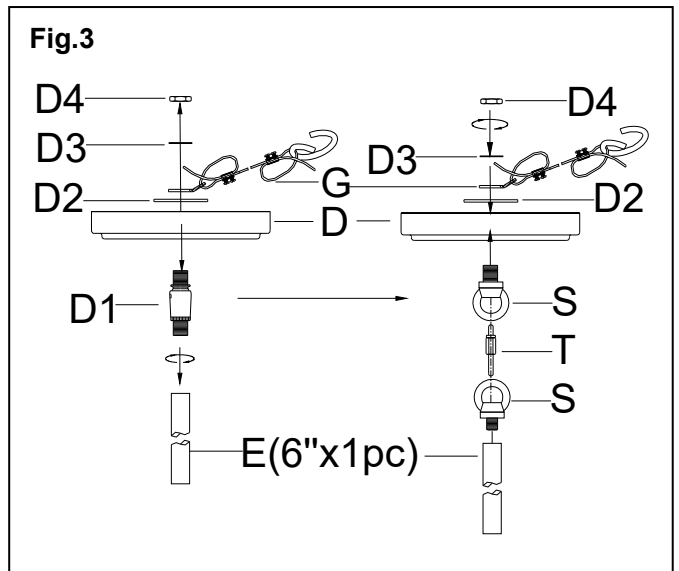

12419-860