

INSTALLATION INSTRUCTIONS

Item#12129-XXX

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. Determine the desired hanging height and thread rods (H, I) to the all thread of the fixture body(J). Pass the wires carefully through each rod as you assemble. Then secure the swivel (G) of canopy (D) onto rod (H). Carefully feed the wire through the swivel (G)
4. Remove mounting screws (F) (Size:#8-32 0.5") from canopy (D). Secure mounting plate (B) to the junction box (not included) using mounting screws (C) (Size:#8-32 1"). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (B) using the green screw provided.
6. Tuck the wire connectors neatly into the ceiling junction box and then raise the canopy (D) to the ceiling

FINISH THE INSTALLATION (Fig. 1)

7. Place canopy (D) onto mounting plate (B) and secure with mounting screws (F).
8. Install the glass (L), socket cover (M), and socket ring (N) onto the Sockets (K) using a socket wrench(O).
9. Install (10) ten type T10 bulbs (P) up to 60 watts each, Or CFL Or LED equivalent (NOT INCLUDED) in accordance with the fixture specification. **-DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Noted: It is recommended to use type T10 bulb of 125mmL.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


The fixture is over 10 lbs. Please remove all glasses before removing canopy from mounting plate to inspect wire connections in the future. This will allow you to hold the fixture body during wire connection or inspection or fixture removal.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig1.

1

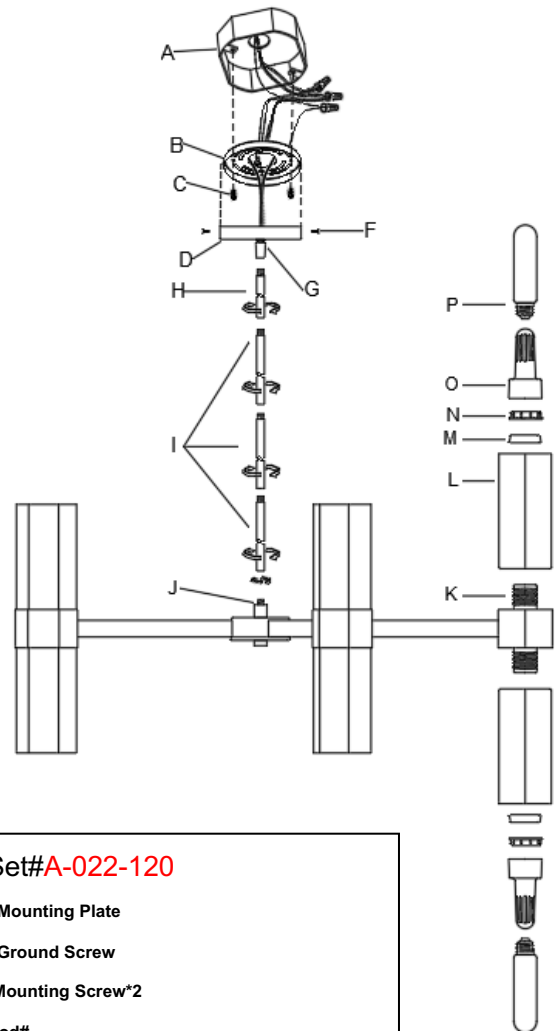

Set#A-022-120

- Mounting Plate
- Ground Screw
- Mounting Screw*2

Rod#

W30-H-732*1(H); W30-H-899*1(H)

W30-1-732*3 (I); W30-1-899*3 (I)

Fig. 2

