

INSTALLATION INSTRUCTION FOR FIXTURE #10255-732

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Insert the fixture wires through the center tube (D), then thread the center tube (D) onto coupling (E) tightly; secure the canopy (B) onto the top end of the center tube (D).
4. Thread the nipple (F) onto the coupling (J), then put the check ring (G), rubber washer (H), glass shade (I), rubber washer (H) over the nipple (F) in order and secure the column (L); Adjust the glass shade to horizontal.
5. Put the rubber washer (H), glass shade (M), rubber washer (H) and steel washer (K) over the nipple (F) in order and secure with hex nut (N).
6. Put the cap (O) onto the nipple (F) and secure with nut (P), then lock the finial (Q) onto the nut (P).
7. Install (3) three candelabra base bulb (S) up to 60 watts or CFL or LED equivalent (Not included) in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
8. Attach mounting plate (A) to outlet box (Not included) using outlet box screws (R). The side of mounting plate marked "GND" must face out.

Fig.1

A-020

Mounting Plate * 1
Outlet box Screw * 2
Ground Screw * 1

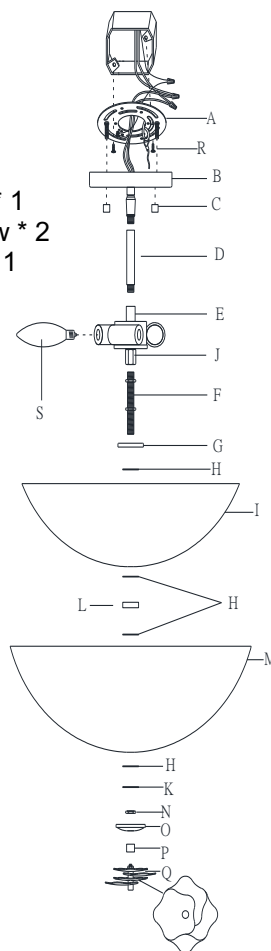


Fig.2

FIXTURE WIRES BLACK OR SMOOTH	HOUSE WIRES BLACK (HOT)
FIXTURE WIRES WHITE OR RIBBED	HOUSE WIRES WHITE (NEUTRAL)
FIXTURE WIRES GREEN OR BARE COPPER (GROUND)	HOUSE WIRES GREEN OR BARE COPPER (GROUND)

CONNECTING THE WIRES (FIG. 2)

9. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate using green screw provided.
10. Tuck wire connections neatly into outlet box.
11. Attach canopy (B) over mounting plate (A) and secure with nut (C) tightly.

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) & (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

