

# INSTALLATION INSTRUCTIONS FOR 2031-732-L 2033-732-L FOR LED BATH

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR.**

## PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

## MOUNTING THE FIXTURE (FIG. 1)

3. Put the driver (K) into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box).
4. Connect the white input wire from the driver (K) to the white wire from the junction box. Connect the black input wire from driver (K) to the black wire from the junction box.
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32\*1/2"L). The side of the mounting plate marked "GND" must face out.

## CONNECTING THE WIRES (FIG. 2)

6. Connect red output wire (marked output +) from the driver (K) to red LED wire (marked LED +) from led module. Connect black output wire (marked output -) from the driver (K) to black LED wire (marked LED -) from led module. Making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.
7. Tuck wire connectors neatly into the junction box.

## COMPLETING THE INSTALLATION (FIG. 1)

8. Align the back plate (E) onto the mounting plate (A) and secure with screws (D).
9. Slide glass (G), cap (H), cement shade (I) and metal gasket (J) onto the socket (F) and secure with acrylic shade (K).


Your installation is now complete. Return power to the junction box and test the fixture.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

**CAUTION/ATTENTION:** When handling the fixture, do not apply pressure to the LED. Hold the fixture by the frame only.

**Dimmable with ELV and/or LED compatible wall dimmer switches.**

**Fig.1**

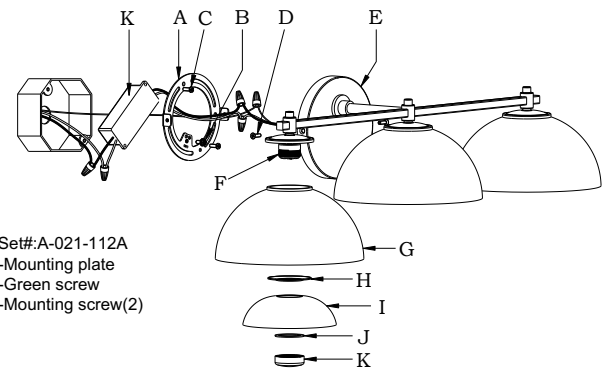

**Fig.2**

