

INSTALLATION INSTRUCTIONS FOR 3939-XXX FOR FLUSH MOUNT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (FIG. 1)

3. Thread the two screws (C) about 1/4" into the pre-drilled holes in the crossbar (A)(part#A-010) spaced the same distance apart as the holes in the canopy (E).
4. Attach the crossbar (A) to junction box (not included) using the mounting screws (D) (Size: 8-32*1/2"L). The side of the crossbar (A) marked "GND" must face out.

CONNECTING JUNCTION BOX WIRES (FIG. 2)

5. Connect the electrical wires as shown in Fig.2, making sure that all wire nuts are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (A) using the green screw (B) provided.
6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (FIG. 1)

7. Loosen the screws (H) and remove the ferrule (G) from canopy (E).
8. Align the canopy (E) with the crossbar (A) and install it.
9. Install (2) two medium base bulb up to 60 watts or CFL or LED equivalent (Not included), in accordance with the fixture specification (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**).
10. Put the glass (F) inside the ferrule (G). Then align ferrule (G) over canopy (E) and secure with screws (H).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the light bulb. Hold the fixture by the base or fixture body only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Fig.1

Set#:A-010

Crossbar

-Green screw

-Mounting screw(2)

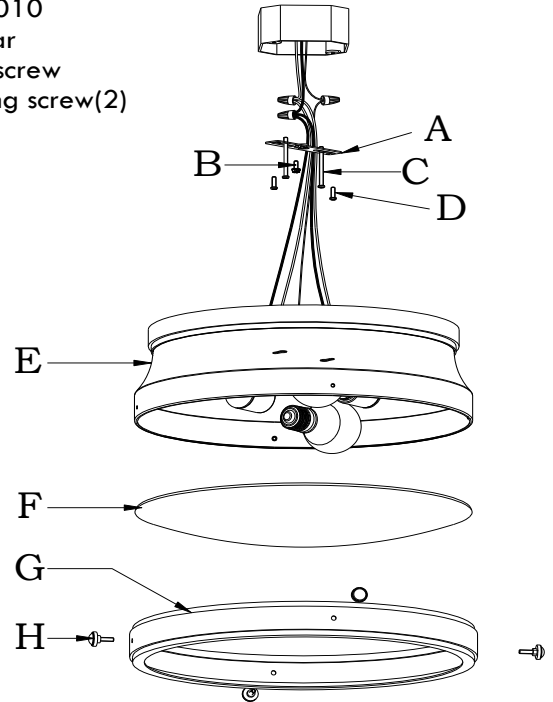


Fig .2

FIXTURE WIRES
Black or Smooth




HOUSE WIRES
Black
(Hot)

FIXTURE WIRES
WHITE OR RIBBED



HOUSE WIRES
White
(Neutral)

FIXTURE WIRES
Green or Bare
Copper
(Ground)



HOUSE WIRES
Green or
Bare Copper
(Ground)



MIN. 90°C SUPPLY CONDUCTORS