

INSTALLATION INSTRUCTIONS FOR 10413-860-L FOR LED WALL SCONCE READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Put the driver (H) into the junction box (not included). (Note: To be installed with a 4" round or octagon junction box).
4. Connect the white input wire from the driver (H) to the white wire from the junction box. Connect the black input wire from driver (H) to the black wire from the junction box. (Fig.2)
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig.2)

6. Connect the red output wire (marked output +) from driver (H) to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver (H) to the black input wire (marked LED -) from led module, make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.
7. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

8. Attach the back plate (E) onto the mounting plate (A) and lock it with screws (D).
9. Rotate the glass (G) to the fixture (F). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION/ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or fixture body only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

Set#:A-021-108140
-Mounting plate
-Green screw
-Mounting screw(2)

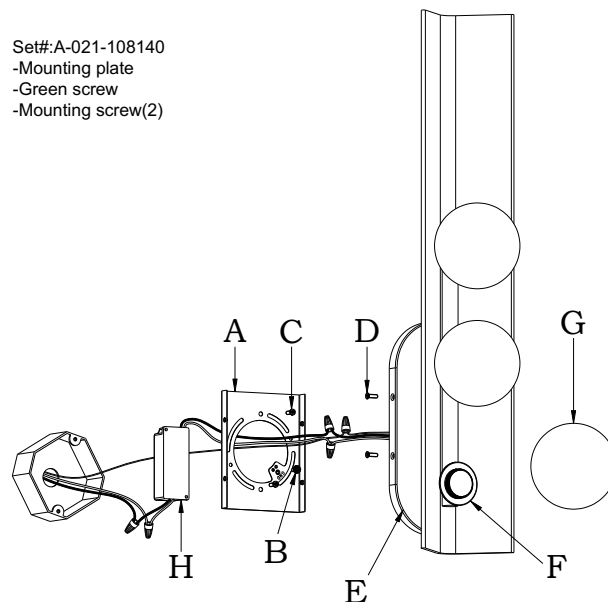


Fig. 2

FIXTURE WIRES	FIXTURE WIRES	FIXTURE WIRES
Black	White	Green or Bare Copper (Ground)
HOUSE WIRES	HOUSE WIRES	HOUSE WIRES
Black (Hot)	White (Neutral)	Green or Bare Copper (Ground)

